


amateur radio

JOURNAL OF THE WIRELESS INSTITUTE OF AUSTRALIA

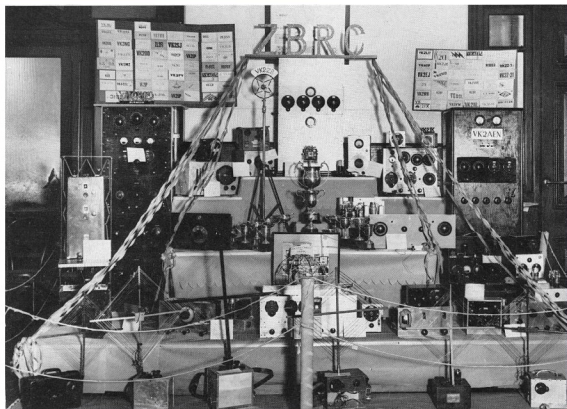

VOL. 46, No. 11

NOVEMBER 1978

CONTENTS

TECHNICAL

Additional Modifications to the FT100B	15
Audio Frequency Shift Keying Generator for RTTY	8
Equipment Review: The Yaesu FT225RD	28
Modifications to the FT101 to Cure Strong Signal Overload	10
Portable Army Sets of WWII	30
Simple Three Shift ST5 or ST6 Demodulator	9
Try This — An Active DX Receiving Antenna	15
USB-LSB Modification for the IC202	22

GENERAL

Amateur Display in the Brisbane Museum	17
--	----

Capricornia Amateur Radio Festival	16
Developing Countries 'Deplete' Western Retention of Freqs.	29
Jim's Shack	23
Marconi 75th Anniversary	18
Qld. Radio Clubs Workshop	24
Remembrance Day Contest 1978—Opening Address	31
The Science Museum Station — VK3AOM	25
Return of the 6 Mx Band—Pt. 2	36
1979 Subscriptions	49

DEPARTMENTS

Amateur Satellites	31
Around the Trade	39
Awards Column	40
Contests	42
Hamads	49
IARU News	42

Ionospheric Predictions	41
Letters to the Editor	47
Magazine Index	48
Meeting Briefs	22
Obituary	50
QSP	3, 23, 24, 37, 40
RTTY Notes	48
Silent Keys	50
VHF-UHF—an expanding world	38
WIANEWS	4
WICEN	31
ADVERTISERS' INDEX	50

COVER PHOTO

During the mid-1930s, radio exhibitions were held in Sydney Town Hall. The display shown in this photo was exhibited by the Zero Beat Radio Club of Sydney, VK3ZB, in 1937 — 41 years ago.

Photo Courtesy Arthur Brown VK2IK

Registered for posting as a Publication — Category "B".

HAM

RADIO SUPPLIERS

323 ELIZABETH STREET, MELBOURNE, VIC., 3000

Phones: 67-7329, 67-4286

Our Disposals Store at 104 HIGHETT ST., RICHMOND (Phone 42-8136) is open Mondays to Fridays, 9.00 a.m. to 5.00 p.m., and on Saturdays to midday.

SIDE BAND ELECTRONICS MODEL MC-310 TRANSCEIVER SPECIFICATIONS:

Transistors, 13; channel number, 3, on 28 MHz Citizens Band; transmitter frequency tolerance, ± 0.005 per cent; RF input power, 1 Watt; tone call frequency, 2000 Hz; receiver type, super-heterodyne; receiver sensitivity, 0.7 μ V at 10 dB S/N; selectivity, 45 dB at ± 10 kHz; IF frequency, 455 kHz; audio output, 500 mW to external speaker jack; power supply, 8 UM-3 (penlite battery); current drain, transmitter—120-220 mA, receiver—20-130 mA; accessory, shoulder strap, battery UM-3, 8pcs, instruction manual.

\$105 Pair — \$58 each
Postage \$2.80

PL-258 Plug W/Reducer	\$1.50
PL-259 Plug W/O Reducer \$1.80 (Adaptors 65c)	
SO-239 Chassis Socket	\$1.50
Right-Angle Joiner	\$2.75
"T" Connection	\$3.50
PL-259 to R.C.A. Adaptor	\$2.75
Coax Joiner, female to female, male to male	\$2.75
BNC Plugs	\$1.95
BNC Sockets	\$1.75
Belling Lee Plugs	75c
Belling Lee Sockets	50c
Belling Lee Joiner	85c

POWER POINT SAFETY TESTER

Simply plug into power point, switch on and observe lights.

PRICE \$3.70
Postage 50c

ARLEC PT2155

240V, 50 Hz, Insulation to ASC126, 1 amp. maximum. 16, 12.6, 9.5, 7.5, 6.3 8.5V.

PRICE \$6.50
Postage \$1.00

ARLEC PT6772

240V, 50 Hz, Insulation to ASC126, 1 amp. maximum. 12, 17.5, 15, 20, 24, 27.5, 30V.

PRICE \$7.50
Postage \$1.00

AUTOSSET DE-LUXE PLUG-IN TIMESWITCH

APPLICATION: Autoset will control any electrical domestic appliance recommended to be used with a plug of up to 13 amps rating on a 220/250 volts 50 Hz supply.

PRICE \$47.50
Postage \$2.00

COMPAC

30 Watts (rms): 50 Watts Maximum; 4 Ohms; Size: 164H x 111W x 114D mm; Deluxe Push Speaker Terminals; Weight Approx. 2.27 kg each; Freq. Range 60-21,000 Hz.

PRICE \$105.00 PAIR
Postage \$4.00

ATRIX 360 FTR

100,000 ohms Volt and Transistor Multitester—Fuse protected.

PRICE \$55.00
Postage \$2.80

Bulk Store Disposals

AT 104 HIGHETT STREET
RICHMOND, 3121
Phone (03) 42-8136

We also have a large range of **ELECTRONIC DISPOSALS EQUIPMENT**, including TRANSFORMERS, CABLE, TEST EQUIPMENT, TRANSMITTERS, METERS, etc.

100 FT. ROLL BELL WIRE

\$3.00 per Roll

USA RECORDING TAPE — POLYESTER

Size 7" 1800 \$5.90 — 1200 \$5.30.
Size 5" 1200 \$4.00 — 900 \$3.00

SINGLE CORE OUTSIDE SHIELDED CABLE 7/0076, 100 yard rolls

\$15.00 per Roll

OMRON RELAY MK 3 DC 35 volts, 3 amp rating, 3 pole changeover. To operate on 220 volts DC or 110 volts DC Series Resistor 6.83 watts

\$5.00 each

NEW MAGNAVOX 53TS SPEAKERS

5" x 3" 8ohm, Ideal for small extension speaker for communications equipment.

\$1.95 each plus P&P

NEW AWA-THORN TV TUNERS

Type ENR5758

\$2 each plus P&P

You are invited to call in and inspect. **NO PARKING PROBLEMS** A 104 HIGHETT STREET RICHMOND. Phone 42 8136.

BASE STATION MICROPHONE WITH SPEECH COMPRESSION AMPLIFIER MODEL TW-232

This model uses a rugged die cast, and is specially designed to fill the need of a base station microphone with high modulation level capability. It is for use with all types of communication transmitter, transceivers, business radios and CB, etc.

PRICE \$45.00
Postage \$2.40

SPECIAL

9" x 6" SPEAKERS — brand new in cartons — 4 ohm impedance — Ideal for car cassettes, radios, etc.

PRICE \$4.00 EACH — Postage \$1.00
10 FOR \$3.00 — BULK BUY

HIKOKI OL-64D

20,000 Ohms per Volt DC, 8,000 Ohms per Volt AC.

PRICE \$32.90
Postage \$2.00

240 POWER SUPPLY KIT

13.8V DC out. at 3 amps

PRICE \$18.90
Postage \$2.40

(All you need is a box to put it in.)

6 FEET MIKE LEADS

4 Wires.

PRICE \$1.80

AMATEUR LOG BOOK — \$2.00

DYNAMIC MICROPHONE PRIMO UD 844

Primo Deck Type, 600 Ohms.

PRICE \$39.90
Postage \$2.00

HAND HELD MIKE

50K Ohms.

PRICE \$14.90
Postage \$1.50

ELECTRO-MAGNETIC ROKING ARMATURE INSERTS

2,000 Ohms, Type 192.

PRICE \$9.50
Postage 80c

KR65 METERS

10V, 20V, 30V, 3 1/2 in. x 2 1/2 in. M-hole 2 1/2 ft. DC.

PRICE \$12.50
Postage \$1.00

KR65

10A, 20A, 30A, DC.

PRICE \$12.50
Postage \$1.00

SOLDER EATER

1-8 Copper Brand, Tinted with Corrosive Resin.

PRICE \$2.20

YAESU FRG-7

THE RADIO FOR WORLD-WIDE LISTENING
AT ITS BEST — 0.5-29.9 MHz COVERAGE
SYNTHESIZED COMMUNICATION RECEIVER



The model FRG-7 is a precision built high performance communication receiver designed to cover the band from 0.5-29.9 MHz. Its state of the art technology offers an unprecedented level of versatility. The Wadley Loop System (drift cancellation circuit) coupled with a triple conversion super heterodyne system guarantees an extremely high sensitivity and excellent stability. It provides complete station selection to amateurs as well as BCUs with superb performance and many features such as RF attenuator, selectable tone, and automatic noise suppression circuit.

\$385.00

MAIL ORDERS WELCOMED. Please allow pack and post on items listed on this page. If further information required send a stamped SAE for immediate reply from the above address. Larger items can be sent F.O.B. Due to circumstances beyond our control, prices quoted in this advertisement are subject to alteration without notice.



amateur radio

Published monthly as its official journal by the Wireless Institute of Australia, founded 1918.

NOVEMBER 1978

Vol. 46, No. 11

PRICE: 90 CENTS

(Sent free and post paid to all members)

Registered Office:
2/517 Toorak Road,
Toorak, Victoria, 3142.

EDITOR:
BRUCE BATHOLDS* VK3UV

ASSISTANT EDITORS:
RON COOK* VK3AFW
GIL SONES* VK3AJU

TECHNICAL EDITORS:
BILL RICE* VK3ABP
KEN PALLISER VK3GJ

CONTRIBUTING EDITORS:
BOB ARNOLD VK3ZBB
BRIAN AUSTIN VK3CA
ROD CHAMPNESS VK3UG
SYD CLARK* VK3ASC
RON FISHER* VK3OM
DAVID HULL VK3ZDH
ERIC JAMESON VK5LP
KEN JEWELL VK3AKK
PETER MILL VK3ZPP
LEN POYNTER* VK3ZGP
WALLY WATKINS VK2ZNW

DRAFTING:
ALL DISTRICTS DRAUGHTING SERVICE

PHOTOGRAPHER:
REG GOUDGE —

BUSINESS MANAGER:
PETER DODD VK3CJF

ADVERTISING:
PETER SIMMONS

*Member of Publications Committee

Enquiries and material to:
The Editor,
PO Box 2611W, GPO Melb., 3001

Copy is required by the first of each month. Acknowledgement may not be made unless specially requested. All important items should be sent by certified mail. The editor deserves the right to edit all material, including Letters to the Editor and Hamads, and reserves the right to refuse acceptance of any material, without specifying a reason.

Advertising: Material should be sent direct to P.O. Box 150, Toorak, Vic., 3142, by the 25th of the second month preceding publication. Phone: (03) 24 8652—Hamads should be sent direct to P.O. Box 150, Toorak, Vic., 3142, by the 1st of the month preceding publication.

Trade Practices Act: It is impossible for us to ensure that advertisements submitted for publication comply with the Trade Practices Act 1974. Therefore advertisers and advertising agencies will appreciate the absolute need for themselves to ensure that the provisions of the Act are complied with strictly. Readers are reminded that, when buying, obtaining or receiving goods from overseas including goods listed in advertisements by overseas organisations in this Journal, Customs import duties and Sales Tax may be levied on the goods at the time of importation. These amounts, if any, are payable by the purchaser unless the terms of sale state otherwise and the seller has made specific provision to this effect in his quotation to the buyer or unless other prior arrangements are in force between the buyer and the seller.

Printers: EQUITY PRESS PTY. LTD.
50-52 Illington Street, Collingwood, 3068
Tel.: 41 5054, 41 5055

QSP — “STATE OF THE ART — HERE AND THERE”

“STATE OF THE ART — HERE AND THERE”

By this time next year, hopefully Project ASERT will be gaining the interest of many people — not only radio amateurs.

For those of you who don't already know, Project ASERT, “Amateur Service Experiment in Radio Transmission”, is a WIA backed VHF/UHF propagation experiment which will tell us more about the vagaries of our bands. See AR September, page 48, for more detail.

A small working group has been established under Bob Arnold VK3ZBB as chairman. Initially the group sees a low scale pilot system in operation making use of existing amateur 2m beacons, and to some extent available equipment. The pilot study will enable the system requirement and performance specifications to be refined so that the project can be initiated hopefully Australia-wide during 1979 — the year of predicted sunspot maxima.

As results come to hand, it is anticipated that they will be published in Amateur Radio. I am sure that the outcome of this experiment will be of great interest to many.

However, while we in Australia think about sophisticated propagation experiments and operate with accepted high quality equipment, have we ever stopped to think as to what the state of the art is with some of our neighbours in Region 3.

A paper from New Zealand to be presented at the IARU Region 3 Conference in Bangkok during October raises some very valid points, amongst them is whether amateur radio can survive and expand as we know it in the major part of the Region.

The point is made that many countries within Region 3 have such poor economies that it would be impossible for many would-be amateurs to purchase even the cheapest of commercial equipment. For many even the cost of components would be a major problem.

To support this point of view, the per capita Gross National Product is quoted (1976 US dollars) for many Region 3 countries, e.g. Australia 5,330, Indonesia 170, Malaysia 680, Thailand 310, Cambodia 70, Tonga 300, India 140; and for comparison France 5,440, UK 3,590, USA 6,670.

These figures should not be construed to be average incomes, they do, however, provide a relative indication of the wealth of each country and therefore some idea of the ability of individuals to participate in a hobby such as amateur radio.

As pointed out in the paper, perhaps the only way in which amateur radio is likely to develop in such countries is on a modest scale with clubs, low power and the use of some of the more fundamental modes of signalling.

What do you think?

PETER WOLFENDEN VK3ZPA, Executive Vice-President.

QSP

STOP PRESS

6 MX DX

ON MONDAY
16-10-78, BERTKHEQI
IN HAWAII WAS
WORKED ON BY PHIL
VK3YDY AND KERRY
VK3ZBXT ON 5SB, AND BY DAVID VK5KK
AND ERIC VK5LP ON CW. SIGS.
PEAKING 599 IN STH. AUST. —
TIME 1000Z.
IT IS THE FIRST TIME IN 20
YEARS AN EVENT SUCH AS THIS
HAS OCCURRED. — VK5LP

CQ-TV AWARD

CQ-TV for July 1979 announced the first CQ-TV award was made to VKTEM of Penguin. This was achieved with 30 contacts, the shortest distance QSO being over a path of 384 km and the longest 550 km.

THE A. G. PITHER AWARD

Announced by the IREE in Monitor for August 1978 is the A. G. Pither Award, open to anyone who has made outstanding technical and administrative contributions to the field of communications or electronics in Australia. The improved overall welfare of individuals resulting from this work would be an important factor in selecting the recipient. This annual award honours the late George Pither VK3VX, a member of the WIA Federal Executive from 1967 to 1971.

ACRC ANNIVERSARY

On the 26th August 1978 the Amateur and Citizens Radio Club (NSW) celebrated the completion of their first twelve months of operation with a noon to midnight party. The club now has 30 members and conducts a monthly net on 80m at 7.30 p.m. EAST on the first Saturday in the month. Fifteen members passed the last Novice examination — 30 members now hold licences.

THE RON WILKINSON ACHIEVEMENT AWARD

A reminder is given that nominations for the Ron Wilkinson Achievement Award for the year 1978 will soon be due. Please refer to AR for March 1978, page 17.

WIANEWS

HANDBOOK REVISION

The revision of the Handbook, suggested by the Institute several times recently, should await the outcome of WARC 79 and the new legislation (long promised, but still not yet in sight) to replace the old Wireless Telegraphy Act.

However, the P. and T. Department has the requirement to begin the revision as soon as the staff situation in central office permits. The revision will therefore be based on the existing legislation.

The Executive have twice previously carried out or commissioned this revision, once by Jack Martin VK5EJ, when he was a member of the Executive some 4 to 5 years ago and a year or two later by Geoff Taylor VK5TY. A considerable number of changes have occurred since then. Not the last of the changes being Novice Licensing. A number of further changes are still in the pipeline as readers of this column will be aware.

The Executive is faced with a massive effort directed towards WARC 79 and consequently the number of amateurs is extremely limited with experience in this kind of work coupled with a continuing knowledge of all the changes which have taken place in recent years (including Institute policy). The Institute has fortunately persuaded George Brzotowski VK1GB, who has special

knowledge in this field, to undertake this task with assistance from experienced amateurs of VK1 Division.

SPECIAL FUND

At the last Executive meeting it was decided to establish a Satellites and Special Projects Fund. The Fund will incorporate monies already earmarked for "Project Australis" and will have additional sums added to it from time to time. From this Fund will derive initial financial assistance for Project ASERT, as well as such other projects, including satellites, as may qualify in the future.

CHANNEL 5A

Material for the preparation of a technical submission to the Minister has not yet been sent in to Executive by such Divisions as have something to offer. Meanwhile the Minister for Post and Telecommunications issued a media release 78/18 in mid-September which, for the record, is reproduced below.

Minister for Post and Telecommunications

Parliament House,
Canberra, A.C.T. 2600
78/18

GO AHEAD FOR ETHNIC TELEVISION

Special television services for ethnic communities will begin operating in Australia on a national basis early next year.

"This was announced today in a joint statement by the Minister for Immigration and Ethnic Affairs, Mr. Michael MacKellar, and the Minister for Post and Telecommunications, Mr. Tony Staley.

DECEMBER AR

This year the December issue of AR will be larger than usual as has been the practice for the last two years. It will contain several specially selected Novice oriented articles.

Although we are calling December's Amateur Radio our "Novice Issue", there will be the normal departments and technical and general articles to cater for all tastes.

The Publications Committee hopes that our "Novice Issue" will be one to be remembered for some time, and is therefore arranging for a limited number of extra copies to be printed.

These extra copies will be available from various electronics commercial outlets, or from the WIA Federal Office, PO Box 150, Toorak, Vic. 3142.

The price for our "Novice Issue" is \$1.20 (plus 50c if posted), the increased price being due to the greater number of pages and to help offset the printing costs.

WIA members and subscribers will of course receive their copy free as usual.

Our current circulation has now reached 7,000 (guaranteed circulation), and next year also looks promising.

If you wish to secure and extra copy of the December "Novice Issue" of Amateur Radio (it would also make an ideal Christmas gift to a CBER) please remit \$1.70 (includes posting) to the WIA, PO Box 150, Toorak, Vic. 3142, as soon as possible.

VKSUV.

WIRELESS INSTITUTE OF AUSTRALIA

Federal President: Dr. D. A. Wardlaw VK3ADW

Federal Council:

VK1 Brig. R. K. Roseblade VK1QJ

VK2 Mr. T. I. Mills VK2ZTM

VK3 Mr. J. Payne VK3AED

VK4 Mr. N. F. Wilson VK4NP

VK5 Mr. I. J. Hunt VK5QX

VK6 Mr. N. R. Penfold VK6NE

VK7 Mr. P. D. Frith VK7PF

Staff: Mr. P. B. Dodd VK3GIF, Secretary.
Part-time: Col. C. W. Perry, Mrs. J. M. Seddon and Mr. P. Simmons (AR advertising).

Executive Office: P.O. Box 150, Toorak, Vic., 3142.
2/517 Toorak Rd., Toorak, Ph. (03) 24 8052.

Divisional information (all broadcasts are on Sundays unless otherwise stated):

ACT:

President — Mr. E. W. Howell VK1TH

Secretary — Mr. Ted Radcliff VK1TR

Broadcasts — 3570 kHz & 146.5 MHz: 10.00Z.

NSW:

President — Mr. D. S. Thompson VK2BDT

Secretary — Mr. T. I. Mills VK2ZTM

Broadcasts — 1825, 3595, 7148 kHz, 28.47, 52.1, 52.525, 144.1, Ch. 8 and other relay stations: 01.00Z. (Also Sunday evenings 09.30Z and Hunter Branch, Mondays 09.30Z on 3570 kHz and ch. 3 and 6).

VIC:

President — Mr. E. J. Bugbee VK3ZZN

Secretary — Mr. J. A. Adcock VK3ACA

Broadcasts — 1825, 3600, 7135 kHz — also on 6m, 2m SSB and 2m Ch. 2 repeater: 00.30Z.

QLD:

President — Mr. A. J. Aarsse VK4QA

Secretary — Mr. W. L. Gielis VK4ABG

Broadcasts — 1825, 3580, 7146, 14342, 21175, 28400, kHz; 2m (Ch. 42, 49): 09.00 EST.

SA:

President — Mr. C. J. Hunt VK5SH

Secretary — Mr. C. M. Pearson VK5PE

Broadcasts — 1820, 3550, 7095, 14175 kHz; 28.5 and 53.1 MHz; 2m (Ch. 8): 09.00 S.A.T.

WA:

President — Mr. L. A. Ball VK6AN

Secretary — Mr. P. Savage VK6NCP

Broadcasts — 3600, 7080, 14100, 14175 kHz, 52.656 and 2m (Ch. 2): 01.30Z.

TAS:

President — Mr. I. Nicholls VK7ZZ

Secretary — Mr. M. Hennessey VK7MHC

Broadcasts — 3570, 7130 kHz: 09.30 EST.

NT:

President — Dick Klose VK8ZDK

Vice-Pres. — Barry Burns VK80U

Secretary — Graeme Challinor VK8GG

Broadcasts — Relay of VK5WJ on 3.55 MHz and on 146.5 MHz at 2330Z. Slow more transmission by VK8HA on 3.55 MHz at 1000Z almost every day.

Postal information:

VK1 — P.O. Box 46, Canberra, 2600.

VK2 — 14 Atchison St., Crown Nest, 2065 (Ph. (02) 43 5795 Tues & Thurs (10.00-14.00h).

VK3 — 412 Brunswick St., Fitzroy, 3065 (Ph. (03) 41 3535 Sat 10.00-12.00h).

VK4 — G.P.O. Box 535, Brisbane, 4001.

VK5 — G.P.O. Box 1224, Adelaide, 5001 — HQ at West Thebarton Rd., Thebarton (Ph. (08) 254 7442).

VK6 — G.P.O. Box N1002, Perth, 6001.

VK7 — P.O. Box 1010, Launceston, 7250.

VK8 — (incl. with VK5), Darwin ARC Club, P.O. BOX 37317, Winnellie, N.T., 5789.

Slow more transmissions — most week-day evenings about 09.30Z onwards around 3550 kHz.

VK QSL BUREAU

The following is the official list of VK QSL Bureaus, all are inwards and outwards unless otherwise stated.

VK1 — QSL Officer, G.P.O. Box 1173, Canberra, A.C.T. 2601.

VK2 — QSL Bureau, C/- Hunter Branch, P.O. Terahba, N.S.W. 2284.

VK3 — Inwards QSL Bureau, Mr. E. Trebilcock, 340 Gillies Street, Thornbury, Vic. 3071.

VK4 — Outwards QSL Bureau, Mr. R. R. Prowse, 30 Brewer Road, Bentleigh, Vic. 3204.

VK5 — QSL Officer, G.P.O. Box 538, Brisbane, Qld., 4001.

VK6 — QSL Bureau, Mr. Geo. Luxon VK5RX, 203 Belair Road, Torrens Park, S.A. 5062.

VK7 — QSL Bureau, Mr. J. Rumble VK6RU, G.P.O. Box 3719, Perth, W.A. 6001.

VK8 — QSL Bureau, G.P.O. Box 371D, Hobart, Tas. 7001.

VK9 — QSL Bureau, C/- VK8HA, P.O. Box 37317, Winnellie, N.T., 5789.

VK9, 9 — Federal QSL Bureau, 23 Landale Street, Box Hill, Vic. 3128.

They said that the Government had made arrangements to provide for multi-cultural television services in line with its commitment to ethnic communities.

The permanent service would be administered by the Special Broadcasting Service in consultation with the Ethnic Broadcasting Advisory Committees. It would use channels within the Ultra High Frequency (UHF) band. Installation costs of the UHF transmitters would be borne by the Government, the Ministers said.

The joint statement advised that the Government had agreed to the establishment of a temporary service from early next year because it would take some time to set up the permanent service. It said that the temporary service would use facilities of the Australian Broadcasting Commission.

The Ministers said that the responsibility for administration of the temporary service, like the permanent service, would be vested in the SBS. The SBS had negotiated an agreement with the ABC whereby ABC facilities could be used to transmit programs as an interim measure.

This would provide practical experience of multi-cultural programs which would be invaluable in the final decision-making on the form the permanent service would take. It would also assist as a basis for consultation on the types of programming suitable in the long-term development of a multi-cultural, multi-lingual television service.

The SBS, in conjunction with NEBAC, would co-ordinate the preparation of a public discussion paper on needs, programs and structural and administrative options for the permanent "special purpose" television service.

The Ministers said that the SBS would be the responsible authority for financing the new service. The SBS would be able to purchase or commission programs from independent production houses and other programs makers in both Australia and overseas.

It is expected that the permanent service, to be administered by the SBS, would be transmitting in 1980. Canberra, 20 September 1978."

WICEN

The Executive noted that in some States the Department refused to permit WICEN operators to set up training exercises in conjunction with suitable local events. This had already been discussed at the last Joint Committee meeting but will now be taken up more strongly.

NEW RB FORM

Rumblings have been heard from time to time about Institute SWL members facing problems with the possession of receivers. From Queensland comes news of a new form RB381 entitled "Application to hold transceiver while undertaking AOCIP studies". The applicant is required to nominate a licensed full or limited amateur operator or amateur club to act as guarantor and to have custody of all transmitting valves removed from the transceiver. In the case of solid state finals these must be effectively immobilised.

Readers will remember the printed inserts into AR for December last year and January 1978 relating to policing the frequency spectrum and controls over transmitting equipment.

As far as is known these new forms RB381 are in use only in Queensland.

WARC 79 FUND

A circular was due for mailing out early in October to all known non-members soliciting donations towards the expenses of WIA representatives for WARC 79. Since the address labels for these non-members derive from the WIA computer file it is hoped this will also assist with updating the file in preparation for the 1979 Call Book.

EMC

Early in October the Minister for Post and Telecommunications will be holding a meeting in Sydney to discuss informally measures which might be adopted to improve the immunity of consumer electronic equipment to interference from radio transmitting sources. The WIA received an invitation to attend and is to be represented by Mr Tim Mills, VK2 Federal Councillor. ■

WAG OR WAZ

here's the antenna jazz — SCALAR — they work anywhere

1. W2AU ANSLATOR

Unadilla/Reyco with built-in lightning arrestor. Hang up hook. Weatherised. Rugged 600lb. pull. Use on Vees, Doublets, Quads, Yagis, Folded Dipoles.

\$16



2. W2AU BALUN

From 50-70 ohms to 200-300 ohms balanced Broadband 3-40 MHz. 1Kw plus. Weatherproof. Lightning arrestor. Balances antenna current. Restores full gain.

\$32

3. MULTIBAND ANTENNA COILS

Reyco reliable from 7MHz to 28 MHz. Standard five band coils operate on 10, 15, 20, 40 and 80 with wire length of 108lb. Provide perfect dipoles and used together obtain five band operation with total wire length of 95ft.

\$33 Set of 2



Power House or Ham Shack — 10.2 on Scalar

Whip this coupon back Q.R.Q. to Scalar

Please send ☐ order form
Or ☐ literature giving more information.
Please print. Prices include sales tax. Freight extra.

NAME.....

ADDRESS.....

STATE..... POSTCODE.....



88's from SCALAR INDUSTRIES PTY. LTD.
20 Shelley Avenue, Kilsyth, Vic. 3137 (03) 725 9677
N.S.W. 20 The Strand, Penrith, 2222 (02) 570 1788
QLD. 969 Ann Street, Fortitude Valley, 4006 (07) 52 2594

Sideband Electronics Sales

Distributors of COMMUNICATIONS TRANSCEIVERS

WE ARE PROUD TO ANNOUNCE

OUR NEW SHOP

IN CROWS NEST, NORTH SYDNEY.

The Trio Kenwood Communication Specialist

PHONE: 438 4191

WORKSHOP: 521 7573

We are displaying the entire KENWOOD RANGE and have it available for you for inspection and purchase. As an addition we include and complete range of TRIO KENWOOD INSTRUMENTATION, test equipment and the like. You may now also see the full range of TRIO KENWOOD latest Hi-Fi and Sound equipment.

Our shop is in a very suitable location and elegant environment. It is in reach of most Sydney customers. We have a large showroom and instant service available.

We do carry all TRIO KENWOOD SPARES. Parking is available at two large Council parking areas also, a rear loading dock also provided so please come up and visit us. Of course the LOFTUS WAREHOUSE and service is continuing as usual. Mail orders may now be placed at either shop.

The new CROWS NEST address is SHOP 9 ROSE & McLEOD PLAZA 477-479 PACIFIC HIGHWAY, CROWS NEST 2085 opposite the old CROWS NEST PICTURE THEATRE, easy walking distance from the W.I.A.

I hope to see you soon to see the latest from TRIO KENWOOD the world's largest manufacturer of Amateur equipment.

KENWOOD AMATEUR RADIO

Yours sincerely,
P. M. SCULZ,
PROPRIETOR.

TS-820
TS-820S
DG-1
VFO-820
Q SP-820
BS-8
DS-1A

YG-88C
Q R-820
YG-88A
YG-445C

YG-445CN

TS-520S
VFO-520S
Q-520
YG-3395C
BS-5
DG-5

DK-520

TV-502S
TV-506
TS-600
TS-700
TS-700S
TS-700SP
VOX-3

H.F. Transceiver
H.F. Transceiver with DG-1
Digital Display
VFO for TS-820
Speaker for 820
Pan Display for TS820/820S
DC Converter for TS820/820S
TS520S
Crystal Filter
Communications Receiver
AM Crystal Filter for R800
C.W. Crystal Filter for
R820 (500 HZ)
Narrow C.W. Crystal Filter
for R820 (250 HZ)
H.F. Transceiver
VFO for TS-520S
Speaker for 520
Crystal Filter
Pan Display for TS520/TS520S
Digital Display and Frequency
Counter
Digital Adaptor Kit
(connects old TS-520 to DG5)
2 m Transverter for 520 & 820
6 m Transverter for 520 & 820
6 Metre all Mode Transceiver
2 Metre all Mode Transceiver
2 Metre all Mode Transceiver
2 Metre all Mode Transceiver
VOX Unit for TS-700

Q SP-70
VFO-700S
AT-200
TR-2200A
VB-2200A
MB1A
TR-7200
TR-7200G
VFO-30G

TR-7010
TR-3200
TR-7400A

TR-7500

RS-6
PS-8
Q R-300
MC-50 *
MC-10 *
MC-35S *
HC-2 *
MC-30S *
HS-5 *
HS-4 *
LF-30A
SM-220
TL-922

Speaker for TX-700
Remote VFO for TS-700SP
Antenna Tuner
2 Metre FM Portable
Power Booster for TR2200A
Mtg. Bracket for 2200
2 Metre FM Mobile
2 Metre FM Mobile

VFO for TR-7200
Crystals for TR-2200
and 7200 (Pair)
2 Metre SSB Mobile
70 cm FM Portable
2 Metre Digital Mobile
(800 Ch 25W)
2 Metre Transceiver
(100 Ch 10W)

AC Power Supply for TR-7500
AC Power Supply for TR-7400A
Communications Receiver
Desk Microphone 500
Hand Microphone 50K
Hand Microphone 50K
Ham Clock
Hand Microphone 500
Headphones
Headphones
Low pass Filter
Station Monitor
Linear Amplifier
(2KW PEP)



KENWOOD

Sideband Electronics Sales

DISTRIBUTORS OF COMMUNICATION
TRANSCEIVERS

NEW! SKY-BAND MOBILE ANTENNAS

THIS NEWLY DESIGNED UNIQUE MOBILE ANTENNA HELICALLY WOUND EXTRA HEAVY DUTY. SIX FEET LONG, AND CAN HANDLE UP TO 400 WATTS P.E.P.

FEATURES:

Light weight.
S.W.R. better than 1: 1.05 at resonance
Covered with highest grade fireproof insulation
Chrome base with 3/8 24 tpi. thread
Available in colours, grey, white, blue, green
burnt orange, brown and black.

AVAILABLE:

SKY. 80M 3.5 Special Novice
3.65
SKY. 40M 7.06
SKY. 20 14.150
SKY. 15 21.100 and up.
SKY. 10 28.5 and up.

PRICE LIST:

SKY 80 6 feet long 3.5 MHz \$28
SKY 40 6 feet long 7.060 \$26
SKY 20 6 feet long 14.150 \$26
SKY 15 6 feet long 21.100 \$25
SKY 10 6 feet long 28.500 \$24
Swivel mounts and chrome
plated springs for all \$13

All Sky-Band Antennas are carefully designed and have been individually tested. High quality fibreglass rod, wound with optimum thickness of wire to keep weight down, but maintain High Q. An elegant design to those who only want the best. All antennas are factory tuned for the lowest portion of the desired band and can simply be trimmed for your chosen frequency. Yes it is all Australian made! You don't pay for large overheads, instead we use the best material available and offer a mobile antenna which will resonate to our frequencies, unlike the previous overseas designed antennas.

ORDER NOW AND SPECIFY THE COLOUR YOU REQUIRE

New designs on the way similar to the famous 'Band Spanner' from 80-10 metres, tunable centre loaded, to be released soon.




SEND FOR A FREE CATALOGUE AND PRICE LIST



SALES & SERVICE

24 KURRI ST., LOFTUS. N.S.W. | OPEN SATURDAYS TILL
P.O. BOX 184, SUTHERLAND. 2232 | NOON. Phone: 521-7573

25 MHz Bandwidth



BWD

ELECTRONICS PTY. LTD.
Miles Street, Mulgrave, Victoria. 3170.
P.O. Box 325 Springvale, 3171.
Telephone 561 2888. Telex 35115

• 5mV Sensitivity

• 30MHz Triggering

Dual Trace Oscilloscope

at a price you expect to pay for half this performance.

The new BWD 539D is superb for CB Radio, μ Processors, Video recorders, Colour TV, Audio systems, Video games or any application where waveform fidelity and measurement accuracy is essential.

Break through the performance barrier.
Ask for your BWD 539D data sheet today.

N.S.W. Amalgamated Wireless (A'asia) Ltd., Sydney. Ph. 888 8111
Q.L.D. Warburton Franki (Brisbane) Pty. Ltd. Phone 52 7255
S.A. Protronics Pty. Ltd., Adelaide. Phone 212 3111
Rogers Electronics, Adelaide. Phone 42 6866
W.A. Cairns Instrument Services, Perth. Phone 325 3144
TAS. Associated Agencies Pty. Ltd., Hobart. Phone 23 1843

AUDIO FREQUENCY SHIFT KEYING GENERATOR FOR RTTY

Ian Hunt VK5QX

Following is a simple but extremely effective circuit of an AFSK generator for radioteletype use. The circuit was designed by Ron VK5FY, and has been used in various shacks around Adelaide with most satisfactory results. It is based on the XR 205 IC produced by "Exar" which is readily available through most components services.

In the configuration shown in Fig. 1, the circuit is used in conjunction with a UART system and requires a logic signal at normal TTL levels applied to the base of the transistor via the 1k resistor to provide the mark/space coding. The 2295 Hz frequency was chosen for the Mark signal in this instance, as being convenient in the overall set-up used.

Operation of the circuit can be very briefly explained by regarding the transistor as a simple switch, which merely switches the configuration of the voltage divider across the IC control pin, pin 13, thus varying the output frequency from the device.

The actual voltage applied to the IC are set by the potentiometers as shown. The 5k pot, between pins 7 and 8, is adjusted to provide a triangular waveform at the output in one direction, and a square wave in the other. Whilst this may appear to be a compromise adjustment in practice it works in fine fashion. The adjustment should be made with the equipment connected up in normal fashion with the waveform being observed on an oscilloscope. The output side of the 10 μ F capacitor from pin 11 makes a good monitoring point.

In fact I work with an oscilloscope constantly monitoring this point whilst in operation which also allows me to see that the AFSK signal going to the transmitter is functioning correctly.

Resistors used are $\frac{1}{4}$ W, but the 0.18 capacitor across pins 14 and 15 should be of good quality. I have built this circuit up several times now, and each time it has worked without any problems. I can thus recommend its use. It is also possible to easily adapt the circuit for other frequency shifts apart from 170 Hz, should you so desire.

KEYBOARD TRANSLATOR FOR RTTY

For use in conjunction with the AFSK generator previously described here is a simple circuit of a keyboard translator which can be used with most teleprinter keyboards.

The circuit is so simple it needs virtually no technical description (see Figs. 2a and 2b).

It is possible, if necessary, to modify the input circuitry to provide a higher

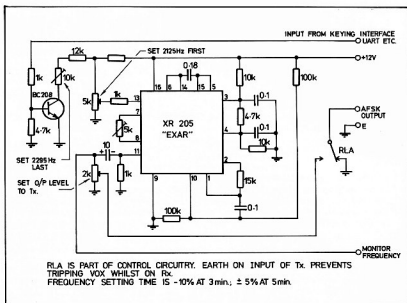


FIG. 1: AFSK Generator.

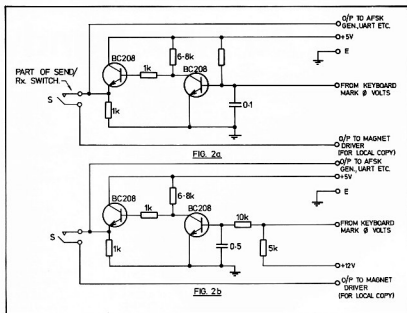



FIG. 2(a).
FIG. 2(b): Keyboard Translators.

switching voltage across the contacts of the keying device. This has been found advantageous when using a model 14 TD tape transmitter due to the contact system used. The transistors used can be BC 108,

2N3565 or similar. Resistors in all cases are $\frac{1}{4}$ W.

SELECTOR MAGNET DRIVER

The circuit in Fig. 3 is that of a solid state magnet driver which has proved the most

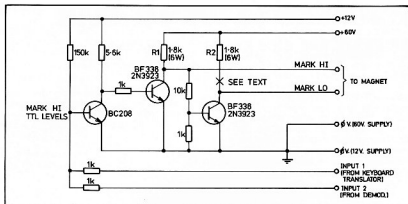

satisfactory. This circuit has been used with both Creed Model 7 machines in a reversing current mode and with slight modification for a Teletype Model 15/19 machine.

Operation of the circuit is virtually self-explanatory so no detailed description of how it works is provided.

The 2 inputs provided allow local copy for monitoring purposes to be fed to one

input, e.g. keyboard translator through transmit/receive switching, and the other input fed from the terminal unit receive side. It is normal to also provide a reasonably large wattage variable resistor in the lines fed to the selector magnet to allow setting of the total current passed through the magnet. A mA meter is usually also placed in series with the line and left in circuit.

The 6W resistors are vitreous enamel, and should be mounted in such a manner as to allow suitable cooling to take place as they can become fairly warm with prolonged operation. All other resistors are ¼W. The driver transistors are a high voltage type but should be readily available from your usual supplier.

For single current working (model 15/19, etc.) the selector magnet is inserted at point X in the circuit (Fig. 3), together with adjusting pot and meter; it may be desirable to vary the values of R1/R2 as necessary. For model 15, etc., the supply voltage should be approximately 110V in lieu of 60V. ■

SIMPLE THREE-SHIFT ST-5 OR ST-6 DEMODULATOR

Modern ham HF operating on RTTY uses 170 Hz shift almost universally, and as a result there is little need to provide capability for receiving other shifts. However, it is useful to be able to receive on other shifts when tuning to commercial stations.

The original ST-6 described a separate filter for this purpose, with a separate space tone filter, and also a separate bandpass filter at the front end. However, unless one is interested in obtaining optimum copy on very weak signals from the commercials, this is unnecessary. I have installed one switch which allows optimum conditions for 170 Hz shift, and allows copy of other shifts commonly used — 425 Hz and 850 Hz. The bandpass filter of the ST-6 used for the 170 Hz operation is bypassed for the higher shifts; of course the ST-5 does not have the bandpass filter.

Fig. 1 shows the basic discriminator circuit normally used in both of these demodulators. It will be noted that C2, which tunes the space tone, is normally about a value of .056 μ F. Referring now to Fig. 2, it will be seen that C2 has been replaced by C2a, which tunes the coil to 2975 Hz, giving a shift of 850 Hz. Value for C2a is about .033 μ F.

An extra switch has been added to select the required shift. This switch is one of the miniature type, which is a double throw type, but has a central position also where the pole is not connected to either side. For the ST-5, any single pole type will suffice, but for the ST-6 a second pole is needed for the relay which bypasses the bandpass filter.




FIG. 1: ST5 and ST6 Demodulator Circuit

After C2a has been installed, and the filter tuned to 2975 Hz, C2b, which should be approximately .022 uF, is installed, and with the switch turned to the 170 Hz position, C2b is adjusted to tune the coil to 2295 Hz. Finally, the switch is turned to the 425 Hz position, and C2c is installed and adjusted to give a frequency of 2550 Hz. The value of C2c will be about .02 uF. (Calculation shows a value of 0.012 uF.—Tech. Ed.) In my case I mounted it directly in the switch.

When receiving shifts of other than 170 Hz on the ST-6 it will be necessary to bypass the bandpass filter. This is done with a relay, which is a miniature double pole double throw type, and is controlled




FIG. 2: Modified ST5/ST6 Demodulator Circuit.




FIG. 3: Bandpass Filter Bypass Circuit.

by the other pole of the shift selection switch. Fig. 3 shows how this is done.

This has made a simple and useful addition to my demodulator. ■

MODIFICATIONS TO THE FT101 TO CURE STRONG SIGNAL OVERLOAD

C. J. Donoghue ZL2BAF

There must be thousands of the Yaesu FT101 series transceivers in Australia. Some of these suffer from overloading and cross-modulation. ZL2BAF has analysed the problem and devised an effective cure. Even if you do not own an FT101 there is food for thought in this article.



About three years ago I purchased a brand new FT101B, and shortly afterwards became aware that the receiver, while excellent in most other respects, exhibited bad overloading on any signal stronger than S9. Local signals were so distorted as to be unreadable without switching in the RF attenuator and backing off the RF gain, desensitizing the receiver to the extent that weaker signals would not be heard. Discussions on 80 metres with other 101 owners revealed that this was a common complaint, and one or two other amateurs said that they had been put off buying a 101 because of this problem.

Considering the evidence gathered over a period from these contacts, I came to the conclusion that what I had thought was a fault in my set was in fact a design fault which showed up in varying degrees of severity in a large percentage of sets, including the 101 Mk. 11, 101B and 101E.

There was one other problem which showed up at times, and proved to be due to the same cause of the overloading, that of cross-modulation, and apparent splatter from local stations on the same band.

I decided to investigate the overload problem in my 101, and started by feeding in an AM signal from the signal generator, modulated about 80 per cent with 400 Hz, at 37,000 kHz. A dual-trace scope was connected to show the IF envelope on one trace, and the audio wave-form from the detector on the other, and a VTVM was connected to the AGC rail. As the RF input was increasing, a point was reached about 10 dB over S9 (200 micro-volts in) where the modulation percentage on the IF envelope increased rapidly, and further increasing the input caused the modulation percentage to increase to more than 100 per cent, accompanied by the onset of audio distortion.

The VTVM read about 5 volts on the AGC rail at this stage. An RF probe connected to a signal tracer was then used to find the stage causing the distortion, which proved to be Q2, 25C784R on circuit board PE1183B IF Unit.

At this point it would probably help if a description of the operation of the 101 RF, IF, and AGC circuits was given. The RF stage is a dual gate FET, with the incom-

ing signal applied to gate 1, and AGC via a resistive divider (100k and 68k) applied to gate 2. The signal passes to the 1st mixer, another FET, where it is heterodyned to the 1st IF, which is broadbanded to cover 5.5 to 6.0 MHz. The output from the 1st IF is passed to the second mixer, another FET, where it is heterodyned to 3,180 kHz, by the VFO, which tunes 8.7 to 9.2 MHz. The next stage is the input to the noise-blanker, this time a bi-polar transistor, then via the noise gate to another FET, the noise-blanker output, and on to yet another FET connected as a source follower to provide a low-impedance drive for the crystal filter. The output from the crystal filter passes to another bi-polar transistor (Q2 mentioned earlier), and then finally to an integrated circuit, CA3053, which drives the demodulators.

The IF voltage appearing across the last IF transformer is rectified to produce a positive voltage which is used to drive two transistors connected as a Darlington pair (Q4 and Q5 on the IF board). The AGC rail is supplied through a 3k3 resistor from a 10 volt zener diode, and the

transistors Q4 and Q5 are also connected to the AGC rail, thus causing the AGC voltage to vary from about 8 volts with no signal to about 4.5 to 5 volts with an S9 signal. The increasing current through Q4 and Q5 with signal is used to drive the S-meter.

Of the eight stages of amplification, three are controlled by the AGC; the RF stage, the last IF IC, CA3053, and the transistor Q2 2SC784R immediately before the CA3053.

A perusal of the published data for both the RF FET and the CA3053 indicated that AGC voltage excursions as provided by the 101 AGC rail were well within the specifications, except that the control on the RF stage could be somewhat greater to reduce the gain more on strong signals. Q2, however, was the stage with the problem, and a study of its AGC biasing showed the reason. Since Q2 is a bi-polar transistor, its base requires forward bias, and this is obtained from the AGC rail through the usual divider resistors, in this case a 27k and a 3k9. In the 101E the upper resistor is a 22k. As the AGC voltage drops with increasing signal, the bias applied to the transistor decreases, lowering the gain of the stage. However, the transistor is a silicon device, and requires at least 0.65 volts on the base with respect to the emitter to overcome the base-emitter potential drop, which means that the minimum voltage at the top of the divider must be about 5 volts. If the AGC voltage drops below this value, the transistor becomes cut off, and hence there is no output. When the incoming signal is strong enough to produce this condition, severe distortion is the result.

The first solution to present itself was to provide a small fixed bias current to the base so that it could not cut off under any conditions. This was done by fitting a resistor from the zener diode supplying the AGC rail to the base of the transistor Q2, of a value chosen to supply just enough current to prevent the transistor cutting off, the value working out at 82k. The resistor was simply fitted to the back of the board. The current thus supplied reduced the AGC action on the stage, and hence a greater AGC voltage was developed, which improved the control on the RF stage, with a vast improvement in the cross-modulation and splatter troubles. Because of the increased AGC action, the S-meter read much too high, and was reduced to read S9 on the calibrator at 14,200 kHz.

The overload troubles disappeared as well, no stations ever causing distortion even with the attenuator out and the RF gain full on. A number of 101s were modified, and all showed the same improvement.

While the modified sets worked well, it seemed that something was just not exactly right, and some further thought was given to the problem over a period of

time. Some more measuring was undertaken, namely a graph of AGC volts against RF input voltage, which showed a knee in the curve at the point where the AGC voltage dropped below the point where it had control of the IF stage Q2. Any signal stronger than that was being controlled by only two stages, the RF stage, and the CA3053. While the signal required to reach that point was much stronger than that which caused the original overload in the unmodified form, it could still be reached by a local signal, and the receiver would sound rather fussed, though not actually distorting, apparently caused by a rise in the audio output since the AGC could not hold the output level.

This state of affairs led to the final modification, as follows. It was decided to remove the voltage-divider biasing completely from the IF stage Q2, and to fit current bias from the AGC rail through a 1M8 resistor, chosen to give the right collector current under no-signal conditions. This provided a linear decrease in the bias current right down to an AGC voltage of about 1 volt, in contrast to the first modification, but did not give enough gain reduction, resulting in too much AGC voltage for a given signal level, and adversely affecting the signal-to-noise performance at moderate signal levels. The decision was made to control an additional stage, previously uncontrolled, and a study of the circuit suggested Q2 in the noise-blanker circuit, another bi-polar transistor. The bias for this stage is also via a divider, 22k and 4k7, and these were removed, and, like the other, current bias was fitted, but this time using a 1M2 resistor. The S-meter was readjusted, and the performance checked out, with most gratifying results. The receiver refused to show any signs of overload right up to the full output of the signal generator, about 50 millivolts.

The most brutal test was devised, which was to modify another 101 to the same circuitry, and then both sets were fitted into their respective cars (both being mobile) and the cars parked alongside each other, a QSO was held at full power. Although the aerials were only about eight feet apart, and the overload protection lamps on the rear of the sets were flashing brightly with the RF, the audio was clean and easy to resolve, with the RF attenuator switched out, and the RF gain full on, and the S-meter reading about 40 dB over S9.

Cross-modulation has disappeared, and the set will work happily with other local sets on the same band, unless they are very close together.

Step-by-step details of the modification are as follows: Remove the AF unit, PB1189, the second board from the left when viewed from the front of the set, by undoing the two screws and carefully rocking the board endwise while lifting it

up, and lay aside. This board is removed to gain access to the IF board, PB1183B, on the extreme left of the set.

Remove the two screws holding the vertical metal shield supporting the IF board, and ease the IF board up and out of the set complete with shield.

Remove the shield.

Locate the transistor Q2 on the top edge of the board, and its base bias resistors: R10 and R11 in the 101B and 101E; and R16 and R17 in the 101 Mk. II.

Remove these resistors CAREFULLY. The board is a double-sided printed circuit with plated-through holes, so use a solder-sucker or solder wick and not too much heat. R10 and R11 are 22k and 3k9 in the 101E, 27k and 3k9 in the 101B; and R16 and R17 are 27k and 3k9 in the 101 Mk. II.

Replace R10 (R16) with a 1M8 resistor, leaving no resistor in R11 (R17), making sure that there are no specks of solder stuck on the board.

Re-assemble the IF board to the shield, and fit to the set, and fit the AF unit.

Remove the screw securing the noise-blanker board PB1182, and remove board from the set (PB1292 in the 101E and 101B). Locate the transistor Q2 in the 101 Mk II and its bias resistors R5 4k7, and R2 22k; and remove the resistors with the same care as before. Replace R6 or R2 respectively with a 1M2 resistor, leaving no resistor in the other place. Connect the base end only for now. On the 101B and E, locate pin 3 on the edge connector, and isolate it from pin 2 by cutting the copper between them. Solder the other end of the 1M2 resistor to the pin 3, and fit the board to the set.

On the 101 Mk II, the NB board is mounted on top of the VFO unit, and connections are made by means of wires to the set. Find a suitable anchor point (fit a solder lug) and connect the AGC end of the 1M2 resistor to it, with a wire to the AGC rail under the chassis. Refit the board to the set.

Remove the bottom cover and the internal speaker panel, and locate pin 13 on the IF unit edge connector socket. This is the AGC rail. Solder a wire to pin 13, and route to the NB board edge connector socket. Isolate pin 3 from ground, and connect the AGC wire to pin 3.

Re-assemble the set.

Switch the set on and tune to 14,200 kHz, turn on the calibrator, and peak the prescaler for maximum S-meter reading. Locate the S-meter adjust control on the IF board, and set the S-meter to read S9. If you care to measure the AGC voltage it should be 4.0 volts ± 0.25 volt.

That completes the modification, and you should now have a receiver equal to the best.

Reproduced by arrangement from Break-In, March 1978. ■

TO COMPLEMENT OUR USUAL RANGE OF CRYSTALS

BRIGHT STAR CRYSTALS PTY. LTD.

35 EILEEN ROAD, CLAYTON, VIC., 3168.
Phone: 546-5076 (Area Code 03)

CAN SUPPLY A RANGE OF —

- OSCILLATORS
- WIDE-BAND AMPLIFIERS
- TTL & CMOS DECADE COUNTERS
- ELECTRONIC CRYSTAL OVENS



INTERSTATE AGENTS:

Adelaide: ROGERS ELECTRONICS — Phone 42 6666
Brisbane: FRED HOE & SONS PTY LTD — Phone 47 4311
Perth: COMMUNICATION SYSTEMS — Phone 76 2566
Hobart: DIAMOND INSTRUMENTS — Phone 47 9077

All Mail to be addressed to: P.O. BOX 42, SPRINGVALE, 3171

The Perfect Mobile Rig

ATLAS 210X/215X

5 band, 200 watt, all solid state, HF/SSB CW Transceiver — 9½" x 9½" x 3½".
\$825 incl. tax

ATLAS 350XL

10-160m — all solid state HF/SSB CW Transceiver, 350 watts.

\$1250 incl. tax

Standard features too numerous to list here.

350 XL OPTIONS:

Digital readout, plug-in auxiliary VFO, plug-in aux. crystal oscillator, matching AC power supply, plug-in mobile mounting kit.

American made Atlas Radios are now available to Australian hams at sensible prices. I keep only Atlas in stock and don't wait for your order before indenting. One year warranty on all products. Service if any, done in Melbourne.

Write or phone for brochures and prices:

EDDIE ROOMS

12 BAILEY STREET,
BAIRNSDALE, VIC.

(051) 52 2822 — (03) 547 5860

For Atlas and Amateur Radio Maritime Mobile.

APPOINTED KENWOOD DEALER



THE NEW TS 520S



A NEW STANDARD IN ECONOMY TRANSCEIVERS

Full coverage 1.8 to 29.7 MHz * Outstanding Receiver Sensitivity and Minimum Cross Modulation * Vernier Tuning for Plate Control * Highly effective Noise Blanker * New Improved Speech Processor * RF Attenuator * Easy connection to Phone Patch * Fully compatible for optional 6-Digit Read-out * Price: TS 520S **\$685**

NEW RELEASE TS 120V

SSB/CW MOBILE TRANCEIVER

Features All Solid State Design * Digital and Analog Display * Noise Blanker * I.F. Shift * V.O.X. * Fix Channel Facility * 3.5MHz to 29.7 MHz * W.W.V. * R.I.T. * 25 KHz Calibrator * 30 Watts Input * Nominal 13.8 Volt * Size 241W x 94H x 235D * 4.9 KG. Expected into stock late November, order now to avoid disappointment at our **SPECIAL INTRODUCTORY PRICE**

ALL PRICES SUBJECT TO CHANGE WITHOUT NOTICE
ONWARDS forwarding. Please add sufficient for freight or postage, excess will be refunded.

FOR AMATEUR EQUIPMENT BASED ON COMPETITIVE PRICES, PHONE OR WRITE TO:—

Amateur Electronic Imports

P.O. BOX 160, KOGARAH, N.S.W. 2217
TELEPHONE: (02) 547-1467
CABLE: "AMATEURIMPORT, SYDNEY"



AMATEUR RADIO CENTER

5/12 KELROY PLACE, ASQUITH, N.S.W., 2078

TELEPHONE: (02) 652 1492 and (02) 98 6249



- Q.: THINK YOU WERE SUCCESSFUL IN THE LAST EXAM?
Q.: HAVING PROBLEMS TRANSLATING THEORY INTO PRACTICE?
Q.: CONFUSED BY THE CLAIMS OF MANUFACTURERS?

THEN COME AND TALK TO US!

We have a wide range of radio equipment suitable for your operating requirements. We have the know-how to assist you in setting up a new station or updating your existing equipment whether your QTH is: A CITY FLAT — A SUB-URBAN HOME — ACRES OF COUNTRY SPACE.

Whatever your lifestyle, you can enjoy ham radio.

SPECIAL — POWER SUPPLIES

138/3	3A	13.8V	Reg. Supply	P.O.A.
138/5	5A	13.8V	Reg. Supply	\$55.00
138/10	10A	13.8V	Reg. Supply	P.O.A.
138/20	20A	13.8V	Reg. Supply	P.O.A.

These power supplies are ruggedly designed for Australian conditions. All ratings are continuous. Filtering is through computer grade capacitors.

WE ALSO MANUFACTURE TO YOUR SPECIFICATIONS.

GILCO AMATEUR RADIO CENTER

5/12 KELROY PLACE, ASQUITH, N.S.W. 2078

Props.: JACK GILLHAM VK2DG, HORST LEYKAM VK2BHF.

SOCIAL RESPONSIBILITY: We reserve the right to refuse sale of transmitting equipment to unqualified persons.

YAESU



hy-gain
ANTENNAS



ANTENNA PARTS, KITS



QUAD HUB, \$39.50 plus Postage
(3 kg) mass.

QUAD KIT, \$153, freight forward
Consisting of Hub: 12 ft. solid F/G.
Spreaders: Aluminium Extenders.
Ferrules, Adaptors: 350 ft. 0.064 Hard
Drawn Copper wire.
Nylon line and insulators.

MOBILE ANTENNA PARTS, etc.

NEW BUSINESS ADDRESS:

J. VAILE

3 LESLIE COURT, BURWOOD
VIC. 3125. — PHONE 288 1047

AMATEURS' PARADISE

Buy from
Queensland's
Stockist

ENJOY HAM RADIO NOW

TS820S	\$139 Deposit
TS520S	\$89 Deposit
ICOM IC701	\$169 Deposit

ALL IN
STOCK FOR
IMMEDIATE
DESPATCH

SOLE DISTRIBUTORS for Queensland of the new **BEN LINEAR**
AMPLIFIERS — Models for all bands — 70-120 watts — all the
one price, \$159 — a beautiful unit.

Ask for details of our EASY PAYMENTS PLAN for all gear.

121 NERANG STREET, SOUTHPORT, QUEENSLAND 4215
(Opp. Southport Hospital) Telephone: (075) 32 2644

WHAT IS G.F.S. ELECTRONIC IMPORTS UP TO THIS TIME?

... really good things. G.F.S. has added two new product lines to our already extensive range of Ham equipment. They are ATLAS, manufacturers of the "Mity seven pounds of dynamite 210X" and DENTRON with their military precision MLA-2500B linear amplifier. As always we provide the service and back-up worthy of such fine products.



The model 210X 80-10 metre transceiver punches 200 watts PEP input from its tiny 9 1/2" x 3 1/2" x 9 1/2" 7 pounds. It has a highly sensitive receiver (0.4uV for 10dB) and is ideally suited to mobile operation, or is quite at home sitting on the shack operating desk working the world. In spite of its small size you'll find that operating the 210X is a delightful experience because it has full size knobs and tuning dial unlike some other brands whose controls are reduced down with the size of the set.
PRICE \$849.00



ATLAS ACCESSORIES

220-05 AC operating console provides 240 Volt mains operation for the 210X with easy plug in and removal. \$164.00

200 PS Portable AC power supply \$140.00

DMK Deluxe plug-in mobile mount complete with DC cable \$58.00.

MBK Mounting bracket kit \$9.00.

DCC D.C. power cable for use with the MBK \$13.00.

PC-120 Noise blander PCB \$58.00

DL-200 200 Watt Dummy load

DX-555D Counter/Signal generator



EMOTATOR ROTATORS


201AX Medium Duty Rotator
202 CX Heavy Duty Rotator
1102 MX Extra Heavy Duty Rotator





160-10AT. SUPER TUNER.

The tuner that accepts all feed lines at 1KW PEP 160 to 10 meters \$186.00.



BIG DUMMY

Dentrons 2KW (1PEP) oil cooled dummy load. 1.8 - 3000 MHz \$43.00.

For more information on Dentron products just drop us a line.

DON'T FORGET WE ALSO HAVE THESE UNITS AT PRICES YOU CAN AFFORD.

FT-101E	160-10M 260W TCVR
FT-801DM	160-10M 200W TCVR
FT-7	80-10M 25W TCVR
FT-301S	80-10M 25W TCVR
FT-301	160-10M 200W TCVR
FT-301D	Digital 200W TCVR
FP-301	20 Amp 301 Series PS
FL-2100B	80-10m Linear Amp
YO-301	301 Series Monitorscope
YO-100	101 Series Monitorscope
YP-150	Dummy Load/Wattmeter
FRG-7000	Digital Comm Rx
TS-520S	120-10m 200W TCVR

Dentron

GFS are proud to announce that we are now the Victorian Agents for Dentron Radio Co. highly quality products. **MLA-2500B 2KW PEP** linear amplifier uses 2 x Eimac 8875 tubes. **ONLY \$1190.00.**



JR. MONITOR 300 Watt antenna tuner with a relative power indicator Only \$104.00.

MT-3000A High power (3KW) Antenna Tuner combination unit. Features tuner feed line, random wire and balanced feed systems, 5 position antenna selector built in 250 Watt dummy load plus 2KW power/SWR meter. All of this for just \$447.00

MT-2000A High power (3KW) Antenna linear plus Co-Ax by-pass switch. \$270.00.



ANTENNAS

Series Quads with 14dB Gain
SQ-15 15 metre Swiss quad
SQ-10 10 metre Swiss quad
VS-33 Hidaaka Tri-band yagi 10/15/20
VS-22 Hidaaka 10/15 Yagi
KB-105 10-80 m trapped vertical
A-248D 80-20 m trapped dipole
20 foot self supporting tower \$75

MORSE CODE KEYS

HK-710 Commercial Quality Key \$45.00
HK-704 High Quality Key \$26.50
COK-1 Practice Oscillator \$12.50
250Hz CW Filter for TS-520S & FT-101E \$67.

We also stock Co-Ax cable, connectors, SWR Meters as well as a large range Ham Radio accessories. If you have a requirement for any type of home gear just call us, we can most probably help you.

Open Saturday mornings 9.00 - 12.00 noon.

G.F.S. ELECTRONIC IMPORTS 15 McKEON ROAD, MITCHAM, 3132. (03) 873 3939

ADDITIONAL MODIFICATIONS TO THE FT-100B

G. Wilson VK3AMK
7 Norma Street, Frankton 3199

In AR March 1978, pages 10 and 11, a number of modifications to the FT-100B were described. It should be noted that in Fig. 2 the value of two capacitors shown as 0.002 μ F should read 0.022 μ F. Since making the earlier modifications several others have been made which have further improved the performance of the transceiver.

1. RECEIVER PRE-AMPLIFIER:

As with many transceivers the FT-100B worked very well on 80-20m, but lacked some sensitivity on 15m and was quite deaf on 10m. A broadband pre-amp. was added between the antenna relay and the receiver front-end and the improvement in sensitivity was dramatic. The circuit used has been tried in many situations where extra gain was needed ahead of a transceiver and numerous versions have all performed well. The gain is low below 20m and then increases with frequency. No band switching is required and it can be built either on PC board or tag strips. To improve stability keep the input components as far from the output as possible. Despite the apparent simplicity of the circuit there have been no serious problems even with quite solid local signals. The only minor problem was Channel O TV signals getting through the pre-amp. and mixing with internal signals in later stages of the receiver. This was cured by using a low-pass filter on the antenna coax which effectively removed the TV signal before it reached the receiver.

2. INCREASED CALIBRATOR SIGNAL

In the FT-100B when the calibrator is turned on the antenna is cut off, which means the 100 kHz osc. signal doesn't

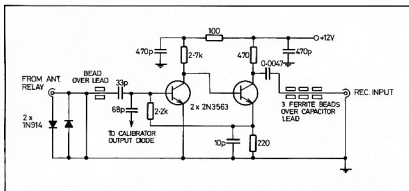


FIG. 1: Receiver Pre-amplifier.




FIG. 2: ALC Level Control.

have to compete with band noises to be heard. Despite this the signal was weak on 15m and all but non-existent on 10m. This was probably a combination of falling receiver sensitivity and harmonic output as the frequency went higher. As supplied, the calibrator signal is taken to the base of TR101 (RF amp.) via a diode and capacitor (C111). After fitting the pre-amp, described above the lead to C111 was removed and connected via a 68 pF capacitor to the base of the first 2N3563 in the pre-amp. This produced a much stronger 100 kHz signal on all bands on 10m, instead

of no "S" meter reading at all, read almost half scale with a good strong signal making calibration on 10m much easier.

3. ALC LEVEL CONTROL

The ALC circuit in the FT-100B uses a transistor amplifier which in my opinion produces too much control voltage and prevents the 6JMG finals from operating at full output. The relatively low power level available makes it important that the transceiver operates as well as possible, especially in difficult conditions. A diode and preset pot were added to the ALC circuit, as shown in Fig. 2, and this allowed the ALC level to be set to a more realistic position, without reaching distortion of course. The correct setting can be reached by trial and error, but a scope will give a far better indication of the linearity and how much increase can be tolerated.

TRY THIS

WITH THE TECHNICAL EDITORS

AN ACTIVE DX RECEIVING ANTENNA

R. Cook VK3AFW
7 Dallas Avenue 3166

The antenna is the most important element in any receiving or transmitting station. For DX reception maximum performance is required at very low angles of incoming signal.

A quarter wave vertical antenna gives a very good low angle performance when coupled with an effective ground system,

however it is a one band device only. Multi-band verticals are available; these use tuned traps to isolate sections of the antenna so as to present an equivalent quarter wave on several bands. It is not broad band; out of the amateur bands the performance is degraded.

Here is an antenna that is truly broadband, has excellent low and medium angle performance, is omni-directional, provides a signal-to-noise ratio at least equal to a resonant vertical and is compact. What is the catch? Simply that it is a receive only antenna.

An antenna that is shorter than a quarter wavelength may be considered as essentially capacitive. The equivalent circuit is shown in Figure 1.





FIG. 1: Equivalent Circuit of Short Whip Antenna Connected to 50 ohm Coax.

If the antenna is fed with low loss coax and the receiver is properly matched then the antenna sees a 50 ohm load. The resistance R will be small and may be ignored. C will represent a sizable re-

CAPRICORNIA AMATEUR RADIO FESTIVAL

The "Capricornia Amateur Radio Festival" was held in Rockhampton on the 16-17th of September, 1978, by the Central Queensland Branch of the WIA. It was very successful and well attended by amateurs and others interested in radio and electronics. A smorgasbord dinner was held on the Saturday night and the guest speaker was the Queensland Division President, John Aarsse VK4QA. Presentations were made to Les Bell VK4LZ, of North Queensland, for the first worked all Queensland Shore Award and also worked Queensland Cities Award; to Hal Hobler VK4DO and Harold Bremman VK4HB the Certificate and Badge for Meritorious Service from the WIA.



Harold Hobler VK4DO (left) receives the WIA Certificate and Badge from Qld. President John Aarsse VK4QA for meritorious service.

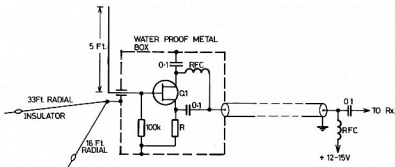


FIG. 2: Simple Active Antenna

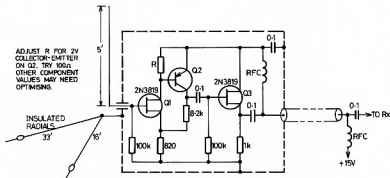


FIG. 3: Active Antenna with Gain.

Adjust R for 2V Collector-Emitter on Q2. Try 100 ohm. Other component values may need optimising.

distance which increases as frequency decreases. It will attenuate the received signal E. For example, a 1.25 metre whip will provide only about 10-15 per cent of the available signal when connected to a 50 ohm line and operated on 10 metres. On 160 metres the signal has all but vanished.

To obtain a reasonable signal-to-noise ratio a full quarter wave antenna is not necessary. As frequency is lowered so the ambient noise level increases, thus a fixed length vertical will deliver a substantially constant signal-to-noise ratio into an open circuit.

If a FET source follower is placed at the antenna base the maximum available signal will be passed to the receiver. A possible configuration is shown in Figure 2. The FET provides matching of the high impedance antenna to the coax over a very wide frequency range.

Q1 may be any FET designed for RF amplification (2N3819, T1588, etc.). R will need to be selected to suit the particular FET's characteristics. 1k ohm would be an average starting value. The DC to operate the FET is supplied via the coax.

The vertical needs to work against a ground plane which may be a collection of radials or a nearby gutter or even a length of waterpipe on which the whip could be mounted. A car radio antenna is a convenient form of whip which may be readily mounted on a bracket on the outside wall of the shack. This antenna should work well indoors as well.

The received signal will not push the S meter up as far as a resonant antenna would but then neither will the background noise. It is the readability of the signal that counts. This antenna will outperform random wires when used over a range of frequencies. This system is used in military and commercial installations, particularly for mobile LF reception, where resonant antennas are impractical.

For those operators who want to see the S meter read higher than the circuit shown in Figure 3 will be of interest. On 28 MHz the received signals will be stronger than from a 3 element beam and almost equal to a full size vertical on 3.5 MHz!

Interested? Build one and write in about the rare DX you hear. ■

The large range of amateur radio equipment displayed by Vicom included the latest new transceivers from Kenwood and Icom, together with literature giving the technical details. Relics of the 1920 to 1940 era of radio development also gave people a chance to compare the advances made in radio over the decades. The exhibits included a World War 2 vintage transceiver and aircraft communications equipment, various radio and transmitter parts dating from the 1920s and a home made loudspeaker along with a hand-cranked turntable. There was also an Oscar display with posters and literature explaining Oscar's origins and functions along with transceivers tuned to Oscar's frequency. A novice display demonstrated and explained the courses currently being


used by the C.Q. Branch, to enable beginners to gain their novice licence. Equipment used by novices on show and posters explained the courses, the function of the WIA and the meeting places and times. Home brew equipment made

wholly by amateurs was also on the display table at the Festival, and at approximately 1300 hrs. on Sunday saw the Festival draw to a close with an all in barbecue held in the area surrounding the National Fitness site. ■



Kevin Adams VK4ZKA (r.) gets a helping hand from Ross Dobbe to solder an antenna connector.
Photos courtesy "Morning Bulletin" — Rockhampton.

main hall, with Bert Hinkler's original tiny Avro Avian biplane suspended almost overhead. The station was operated continually, and caused innumerable enquiries from interested onlookers, who received quantities of informative literature, including details of the decentralized study classes and course available.



Jack VK4AGY and Bud VK4QY discuss the complexities of Spark.



VK4NAD ponders the progression from TPTG to SSB.

Not that the working of an amateur station was the only attraction: diversified exhibits included the morse keyboard and memory devised by Norm VK4NP, complete with VDU fashioned from a discarded TV set. This versatile machine was demonstrated to be capable of many functions, including the ability to defeat all-comers at "tic-tac-toe" and other contests.

Fascinating to the radio buff and layman alike was a large collection of old telegraph keys (carefully preserved and restored by Alan VK4SS) dating right back to the days of Samuel Morse. Complementing this were fine examples of damped spark transmitters and loose-coupler receivers from the shack of a local OOT. The display progressed through other vintage nostalgia to items of WW II military radio which had been pressed into amateur service.

Offering something for all, there was continuous screening of colour video tapes (originating from the ARRL) which illustrated facets of amateur radio. Available space was filled with appropriate photographs and award certificates.

The response received caused the exercise to be counted a definite success. ■

AMATEUR DISPLAY IN THE BRISBANE MUSEUM

Each year the Brisbane members of the VK4 Division offer a week-long display to the public on a site allocation in the Queensland Museum building during the busy time of the school vacation. Organised this year by Rud VK4QY, sterling support was given by many members in the varied duties and by manning the official station

Mervyn Eunson VK4SO
Box 1513, Brisbane, Qld. 4001

VK4WIA/P under the direction of
Jack VK4AGY.

HF and VHF antenna were mounted in the museum grounds, incongruously behind the full-sized models of the tyrannosaurus and triceratops. The rigs and other equipment were installed in a select area of the

MARCONI 75th ANNIVERSARY OF THE FIRST TRANSATLANTIC TWO-WAY RADIO COMMUNICATIONS

Arthur Brown VK2IK
26 Winifred Ave., Epping 2121

It is timely that we in Australia should note the passing of this historical occasion. The RSGB journal, *Radio Communication*, of March 1978 reports fully the celebrations held at Poldhu in Cornwall and Cape Cod in Massachusetts. These were the sites at which the original two-way communications took place on January 18th, 1903.

Amateur stations were set up at Poldhu (GB3MSA) and at Cape Cod (KM1CC) for the week of 14-21 January 1978. Messages were exchanged from members of Marconi's family, President Carter of USA and President Giovanni Leone of Italy. Marchesa Marconi, the widow of Guglielmo, officially opened the station at Poldhu which had been set up in the Poldhu Hotel. Both she and her daughter, Princess Elettra, as guests of honour, took part in the various activities.

It should be noted that prior to the event being celebrated (1933), that Marconi had an earlier installation at Alum Bay on the Isle of Wight. Four bronze plaques on a stone marking the site may be seen by visitors today. This site is about 15 air miles to the West of the powerful Shanklin radar station which tracks and identifies all aircraft movements for London's airport controllers. This station itself is on the war-time site of one of Britain's early warning ray direction finding stations (later called radar).

The plaques at Alum Bay read thus:—

"This stone marks the site of the Needles wireless telegraph station where Guglielmo Marconi and his British collaborators carried out from 6th December, 1897, to 26th May, 1900, a series of experiments which constituted some of the more important phases of their earlier pioneer work in the development of wireless communication of all kinds.

Marconi described the Needles station as the world's first permanent wireless station. It was erected under his personal supervision by his assistant George Kemp for Marconi's Wireless Telegraph Co. Ltd., and was completed on 9th December, 1897. Other radio technicians of this company who pioneered here were P. W. Paget, A. Gray, C. E. Rickard, W. Densham, F. S. Stacey, P. I. Woodward, C. H. Taylor. The station was dismantled in June 1900.

On 15th November, 1899, information for the first newspaper ever produced at sea, the "Transatlantic Times", was transmitted

from this station by wireless telegraphy and printed on the US liner "St. Paul" when 36 miles distant. On 3rd June, 1898, Lord Kelvin sent from the Needles wireless telegraph station the first radio telegram for which payment was made.

The Needles wireless telegraph station exchanged radio messages first with a tug in Alum Bay then with Bournemouth, 14 miles distant, next with Poole, 18 miles away, later with ships 40 miles seawards. These wonders attracted world-wide attention and famous scientists from many countries came (1898-1900) to see the new wireless telegraphy in experimental operation."

The accompanying photo shows the memorial column at the later Poldhu site. The Hotel Poldhu is about 200 metres away from this spot.

Inscriptions on the four bronze plaques at the base of the granite column on the cliff top at Poldhu Cove, near Mullion Village, not far from the Goonhilly Downs satellite tracking station, on the southern tip of Cornwall, an historic site of epoch-making experiments read thus:—

"One hundred yards north of this column stood from 1900 to 1933 the famous Poldhu Wireless Station, designed by John Ambrose Fleming and erected by the Marconi Company of London, from which were transmitted the first signals ever conveyed across the Atlantic by wireless telegraphy. The signals consisted of a repetition of the morse letter "S" and were received at St. John's, Newfoundland, by Guglielmo Marconi and his British assistants on 12th December, 1901.

From the Marconi Poldhu Station in 1923 and 1924, Charles Samuel Franklin, inventor of the Franklin Beam Aerial, directed his short wave wireless beam transmission to Guglielmo Marconi on his yacht "Elettra" cruising in the South Atlantic. The epoch-making results of these experiments laid the foundation of modern high speed radio telegraphy communication to and from all quarters of the globe.

To commemorate the pioneer work done by Guglielmo Marconi and his research experts and radio engineers at the Poldhu Wireless Station between 1900 and 1933, the Marconi Company presented this historic land to the National Trust. Some six acres of cliff land were given in 1937 and 44 acres behind the cliffs on which stood the station were given in 1960.

The Poldhu Wireless Station was used by the Marconi Company for the first trans-oceanic service of wireless tele-



Marconi Monument at Poldhu, Cornwall, U.K.

graphy which was opened with a second Marconi Station at Glace Bay in Canada in 1902. When the Poldhu Station was erected in 1900, wireless was in its infancy. When it was demolished in 1933 wireless was established for communication on land, at sea and in the air, for direction finding, broadcasting and television."

TRIBUTE TO MARCONI

An interesting tribute to Marconi appeared 40 years ago following his death in 1938. This appeared in the BBC Handbook for that year. For those of us interested in our hobby and for those that have made electronics their career the following extract is well worth considering.

"On July 21, following the death of Marconi on July 20, a two minutes' silence was observed on all British wavelengths. In the course of a broadcast tribute, Professor E. V. Appleton said: 'For over forty years Marconi has worked as a radio experimenter, with unflagging energy and enthusiasm. He has never been content to rest. For him we were always at the beginning of things . . . If difficulties seemed to be ahead he tackled them with the zeal of a young experimenter beginning his first research. He was like this to the end . . . Great as his scientific and technical achievements have been, the man has been as great as his work.'"

AVAILABLE SOON

PALOMAR PTR-130K

RECOMMENDED FOR AMATEUR USE

"We've brought space communications technology down to Earth."

The Palomar PTR-130K incorporates features from the outer perimeters of logic technology to become one of the most outstanding communications systems ever introduced to the communications market!

Never before has any communications transceiver approached the capabilities of the Palomar PTR-130K! It's the first completely multi-functional transceiver ever made available to the public!

The Palomar PTR-130K is a miniaturized mobile transceiver capable of operating in 100 cycle resolution from 100 kHz to 30 MHz in all modes of transmission and reception. Instant frequency selection is available with the touch of a finger. Palomar's PTR-130K . . . space technology, at a down-to-earth price.

PALOMAR PTR-130K TRANSCEIVER

Star Features:

- Complete Coverage 1.8-30 MHz.
- Receive Coverage 100 kHz-30 MHz.
- True 100 Hz Frequency Synthesizer with 5 kHz Reference (does NOT use D-A Converter as some amateur rigs claiming 100 Hz synthesis).
- 6 Digit Frequency Readout.
- Digital Readout of Signal Strength in dB Above the Noise Floor of Receiver.
- RF Compressor Effectively Increases Transmitter Output by 12 dB (16 times).
- Approx. 20 watts output.



- Modes: LSB, USB, CW, AM, FM.
- Superior Receive Selectivity — Typical Shape Factor 3 dB/60 dB 1/25 (2 Cascaded Collins Mechanical Filters).
- Diode Ring Mixer with Broadband Load to Optimum Intermodulation Performance.
- 400 Hz CW Filter.
- Size: 6 1/2" x 2 1/2" x 8".
- 58 ICs, including 7 LSI Circuits.
- Watch this space next month for price.

P.O.A.

SL-55 AUDIO ACTIVE NOTCH FILTER DESIGNED FOR THE FT101E

Here is the Receiver Audio Active Filter that makes all others obsolete. The Electronic Research Corporation America Model SL-55 Audio Active Filter adds unequalled versatility in receiver audio processing for SSB and CW. This filter was designed, produced and made available to the amateur community only after painstaking research and field testing of its effectiveness in minimizing QRM.

check these features:

Continuously tunable bandpass filter (not lowpass) so that the passband may be positioned anywhere from 200 to 1400 Hz. 3 dB bandwidth is continuously adjustable from 14 to greater than 2100 Hz (20 dB bandwidth from 140 to 2100 Hz).

Audio input and output impedance is eight ohms with one watt output capability.

Dimensions: 5.5 x 7.5 x 3.5 inches.

Available in grey to match FT101E.



\$129

Positioning of simultaneous notch filter is continuously variable from 300 to 1400 Hz with FINE and COARSE position controls. Notch depth is fixed at nominally 30 dB. Notch tuning is independent of bandpass tuning and may be completely disabled.

Bypass switch restores the receiver audio output path to its original configuration. Power Requirements: 240V AC at less than 1/16 amp. No batteries needed.

BAY CITY ELECTRONICS PTY. LTD.
SHOP 11, STATION STREET, FRANKSTON 3199, PHONE 783 9212 **BANKCARD WELCOME**

FANCY WINNING A TS520S

FOR \$1.00?

SOUTH-EAST RADIO GROUP LOTTERY

1st Prize — KENWOOD TS 520 S	Value \$789.00
2nd Prize — KENWOOD R 300 RECEIVER	Value \$260.00
3rd Prize — KENWOOD MC 50 DESK MIC.	Value \$58.00
4th Prize — KENWOOD HC 2 WORLD CLOCK	Value \$34.00

6000 TICKETS — \$1.00 EACH

DRAWN 22nd DECEMBER, 1978

☆ DON'T MISS OUT ON THIS ☆

If you would like to be part of this Lottery, write for details to:

Lottery Committee, S.E.R.G.

P.O. Box 1103,

Mt. Gambier, S.A. 5290

Promoted, conducted and in aid of

SOUTH-EAST RADIO GROUP BUILDING FUND

Licence No. 5415

Results published in the Adelaide "Advertiser" 26th December, '78.



TRIO DM-800 DIP METER

FEATURES

1. Freq. range 700 kHz to 250 MHz in seven bands.
2. All seven dip meter coils can be encased in the main body so that you can easily carry and safely store them.
3. Your DM-800 is convenient for indoor and outdoor measurements because of all solid-state circuit and built-in battery (D06P).
4. A H-250 socket besides the FT-243 socket enables you to use your DM-800 as a crystal checker and marker generator.
5. An amplitude modulation is convenient in aligning receivers when using your DM-800 as a signal generator. Also, the amplitude modulation is helpful in precisely calibrating the dial scale even for the receiver having no BFO when it is used as the marker generator.
6. The dial scale and dip meter coils are put in five colors so that you can easily identify any band.
7. As an absorption wavemeter, your DM-800 is useful to align transmitters and to measure the field strength.
8. An earphone plugged allows you to monitor transmit signals.

PRICE: \$142.60

Amateur Net (incl. Sales Tax and Postage)

WRITE FOR SPECIFICATION BROCHURE

WILLIAM WILLIS & Co. Pty. Ltd.

MANUFACTURERS AND IMPORTERS

77 CANTERBURY ROAD, CANTERBURY, VIC. 3216
PHONE 836 0707

all rigs predelivery checked!



ICOM

IC701 HF digital solid-state transceiver	\$1,380.00
IC701PS matching power supply / speaker	\$279.00
IC202E 2m sub portable (new model)	\$219.00
IC502 6m sub portable	\$219.00
IC402 70cm sub portable, coming soon!	
IC225 2m fm mobile transceiver	\$335.00
RM-3 Remote controller	\$169.00
ICSM2 condenser-electret desk mic	\$56.00
IC245 2m fm digital mobile transceiver	\$575.00
IC211 digital 2m all mode	\$785.00

KENWOOD

TS520S HF transceiver	\$770.00
TSR20S HF transceiver	\$1,145.00
SPR20 matching speaker with filters	\$65.00
SM220 station monitor	\$319.00
TL922 Linear Amplifier	\$1,389.00
AT200 matching antenna tuner	\$175.00
TV506 6m transceiver	\$250.00
TV502S 2m transceiver	\$260.00
TR3200 70cm fm portable transceiver	\$229.00



KENWOOD TS-820S transceiver

TS-820S features: • Factory installed digital frequency readout • 160 thru 10 meter coverage • Integral IF shift • RF speech processor • VOX • Noise blanker • PLL • Built-in 25 KHz calibrator • CW sidetone & semi-break-in • IF OUT, RTTY, & XVTR • 200 W PEP input

\$1279.00 Give us a call today



399.00

IC-280 2m fm transceiver

REMOVABLE COMPUTER CONTROLLED 144-148 MHz

ICOM



KENWOOD TS-520S transceiver

Features: • 160-10 meter coverage • Optional DC-5 digital frequency display • New speech processor w/audio compression amplifier • AC power supply (DC optional) • RF attenuator, front-panel activated • Provisions for sep. receive antenna & phone patch • 200 W PEP input.

\$789.00 Plenty in stock!

rotators



NEW FROM DAIWA, QUALITY ANTENNA ROTATORS COMPLETE WITH 240VAC CONTROL BOX.

Model DR7500S medium duty
Model DR7600S heavy duty

NEW

\$189.00
\$259.00

Trade-ins accepted

ANTENNA CHANGE-OVER RELAYS (DAIWA)

CX-2L 1.8 thru 170 MHz, 100w pep max	\$48.00
CX-2H 1.8 thru 450 MHz, 200w pep max	\$69.00

COAXIAL SWITCHES (DAIWA)

CS201 2 position, high pwr, up to 500 MHz	\$25.00
CS401 4 position, high pwr, up to 500 MHz	\$59.00

SPEECH COMPRESSORS (DAIWA)

RF440 phasing type, 6dB gain	\$135.00
RF550 filter type, 6dB gain	\$179.00

MORSE KEYS

HK702 detune key with marble base	\$39.00
HK705 economy key	\$21.00
HK706 operator's key	\$25.00
MK701 manipulator (side swiper)	\$43.00
EK103Z electronic key	\$169.00
Palmalor IC Keyer	\$149.00

MICROPHONES

YM-1 noise cancelling, dynamic, low Z	\$9.50
YM-2 Desk mic, dynamic, low Z	\$29.80
MC-50 Kenwood Desk mic	\$58.00
MC-35S Kenwood hand ptt mic	\$28.00
ICom hand ptt, low Z	\$14.50

MOBILE SUPPRESSORS

Hansen NB-2 heavy duty type for alternators	\$9.50
Hansen truck 100 amp alternator filter	\$22.00

TRAP DIPOLES

MIDY VN 80-10M, 23.5M long	\$109.00
AL48DXN 40/80M dipole	\$68.00
AL24DXN 20/40M dipole	\$65.00

TRAP VERTICALS

V4JR 40-10M, 5.2M high, no guys	\$99.00
V5JR 80-10M, 6.7M high, no guys	\$165.00
14AVQ/WB Hy-Gain, 40-10M	\$109.00
18AVT/WB Hy-Gain, 80-10M	\$155.00

DIPOLE KITS

A4VPN 40M dipole kit	\$32.00
----------------------	---------

2M ANTENNAS

Scalar M22T 1/4 wave whip	\$7.00
Scalar M25T 5/8 wave whip	\$17.50
Bases for above	\$4.00
Magnetic Bases	\$19.00
ARX-2 Ringo base antenna	\$49.00

DISCONE ANTENNAS

9DX-1 80-480 MHz	\$84.00
SCAN-X 65-530 MHz (Receiver Only)	\$35.00

DIP METERS

TRIO DM800, ideal for hams	\$145.00
----------------------------	----------

70cm BEAMS (JAYBEAM)

88/70cm, 18.5 dBd gain, 88el, length 3.98M	\$102.00
48/70cm, 15.7 dBd gain, 48el, length 1.83M	\$79.00
PBM18/70, 18el, 14.9 dBd gain, length 2.8M	\$71.00
DS/70cm, twin 8el, 70cm, 12.3 dBd, 1.1M	\$62.00

antennas

SWR/PWR METERS

VC2 twin meters, 3-150 MHz cal. chart	\$34.00
SWR200 Osbornblock 2-200 MHz	\$75.00
SW410A 140-500 MHz, direct reading	\$129.00
SW210A 1.8-150 MHz, direct reading	\$96.00
SWX777 up to 30 MHz, professional	\$131.00

LOW PASS FILTERS

FD30M 32 MHz Fc, 1 Kw max, 3 stages	\$35.00
FD30LS 32 MHz Fc, 200w max, 3 stages	\$20.00

NOISE BRIDGES

Omega TE7-01 up to 100 MHz	\$49.00
Palmalor up to 100 MHz	\$79.00

BALUNS

AS-BL for beams	\$31.50
BL50A 50 ohm 4 Kw model for dipoles	\$26.00
BL70A 70 ohm 4 Kw model for dipoles	\$27.00

VALVES

6146B for Uniden, Kenwood, Yaesu	\$13.00
6KD6 for early Yaesu linears	\$13.00
6JS6C for FT101 series	\$13.50
572B for Yaesu linears	\$59.00

2M BEAMS

5Y/2M Jaybeam, 7.8 dBd, length 1.6M, 5el	\$39.00
8Y/2M Jaybeam, 9.5 dBd, length 2.8M, 8el	\$47.00
10Y/2M Jaybeam, 11.4 dBd, length 4.4M, 10el	\$79.00

VICOM

68 Eastern Road
SOUTH MELBOURNE VIC 3205
PH (03) 699.6700 Telex AA30566

Perth	446.3232	Sydney	681.3544
Adelaide	43.7981	Brisbane	38.4480
Gold Coast	32.2644	Hobart	43.6337
Canberra	82.3581	Melbourne	836.8635



KENWOOD
... poscetter in amateur radio



1.8-28MHz SSB TRANSCEIVER

TS-520S SERIES TS-520S/VFO-520S/SP-520



(Antenna Coupler)

Frequency range..... 6 amateur bands from 1.8 to 29.7 MHz
Input impedance..... 50 Ohms
Output impedance..... 50 to 500 Ohms, unbalanced
Through power..... 200 Watts max.

(Wattmeter)

Type..... Through-line wattmeter
Frequency range..... 1.8 to 29.7 MHz
Measurable RF power..... Up to 20/200 Watts, switched
Kinds of RF power..... Forward and reflected power, switched
Impedance..... 50 Ohms
Accuracy..... Better than $\pm 10\%$ of full scale




The SP-520 has built-in selectable tone filters to attenuate high and/or low frequencies. You can switch between two different receiver sources. Headphones may also be used in conjunction with the filter network.

"TRIO-KENWOOD (AUSTRALIA) PTY. LTD."

31 Whiting Street, Artarmon, Sydney N.S.W. Australia 2064. Telephone (02) 438 1277

INTERSTATE DISTRIBUTORS:

Vic: VICOM IMPORTS P/L (03) 699 6700
Qld: MITCHELL RADIO CO. (07) 57 6830
SA: INTERNATIONAL COMMUNICATIONS SYSTEMS P/L (08) 47 3688
WA: WILLIS TRADING COMPANY (09) 321 7600
Tas: ADVANCE ELECTRONICS (003) 31 5688
NT: R. J. KLOSE (089) 89 3279



Assembling of communications equipment

"PS" Did you know Kenwood are to release a new solid state 30W PEP HF Mobile Transceiver with full 10m coverage, digital display and noise blanker in OCTOBER? WATCH for further details.

USB-LSB MODIFICATION FOR THE IC202

Robin Miller VK3ZVV
60 Winmalee Dve., Glen Waverley 3155

This modification was done in order to receive the Oscar 7 Mode B down-link on 145.950 MHz. It consists basically of changing the value of one capacitor and adding the necessary switching.

The CWT facility is sacrificed in this modification and the switch is used for USB-LSB.

The set can easily be returned to "as bought" condition. No boards are removed from the set and virtually no adjustments are necessary. The work requires some careful soldering and a fine tip soldering iron is recommended as PVC covered wires can easily be damaged.

To generate CW the IC202 shifts the frequency of the 10.6965 MHz xtal to 10.7 MHz by switching off transistor Q8. This leaves a 68 pF capacitor in series with the oscillator frequency trimmer. This capacitor is changed to a 15 pF causing the oscillator to shift to approximately 10.715 MHz i.e. on the other side of the xtal filter. This will give us LSB.

To change this capacitor without removing the main board first use a fine screwdriver to remove the clips from the side of the aluminium can containing the oscillator. These clips must be prised off but they will come off quite readily. Bend them away from the can and then carefully twist the can and pull it free — no forcing is necessary.

Locate C62, then cut it in half with a pair of fine side-cutters, and then carefully remove excess "capacitor" so as to leave two wires protruding up where the 68 pF capacitor used to be.

Solder a small 15 pF NPO capacitor onto these two leads.

Next, carefully solder an 8 inch length of hook-up wire onto base lead of Q8, taking care not to overheat base lead or any surrounding wires.

You may now check that the conversion works by earthing this lead. When earthed Q8 is switched off and LSB signals will be copied. If the conversion is done with care there will not even be any need to readjust trimmer C61.

Replace can with the hook-up wire protruding from underneath, but first loop a small piece of wire through the two clip

holes on each side of the can so that when it is placed back in position clips may be soldered to the side of the aluminium can.

It is now necessary to modify the CWT switch so that it grounds the hook-up wire when in the "up" position (see Fig. 1).

The filter on the IC202 is not particularly good on the high side so rejection of the unwanted sideband when in the LSB position is only about 40 dB. (This should be adequate for reception of Oscar ... Ed.).




Fig. 1: Modifications to IC202 for LSB reception

NOTE:

Wire going to B on switch is actually two grey wires. They should be lifted off the switch and joined together with a covering to prevent shorts.

MEETING BRIEFS

PUBLICATIONS COMMITTEE

The meeting of the Publications Committee on 5th September discussed a number of advertising problems which had arisen and again emphasised the need for photographs for AR. A decision was made regarding standard Oscar orbital tables as an insert into October AR resulting from initiatives and efforts by an advertiser. Some discussions were held about the difficulties of obtaining sufficient volunteers to carry on the work of publishing the magazine and what alternatives required examination.

PROJECT ASERT

The first meeting of Project ASERT Pilot Committee (a sub-committee of the VHFAC) held on 6th September under chairman Bob Arnold VK3ZBB was attended by Ken McCracken VK2CAX, Peter Wolfenden (Exec. Vice-Chairman and Chairman VHFAC) VK3ZPA, and Les James VK3BKF.

Several administrative arrangements were agreed and a division of specific activities was set up. Since the response to the Project could not be estimated at that stage a practical approach on a small scale was set in motion under Les, for hardware, and a design engineer for which various names were suggested.

EXECUTIVE MEETING

At the Executive meeting on 21st September, some time was devoted to a discussion on financial matters, the budget and the difficulties in finding a Treasurer to serve on Executive in place of Keith Roget VK3YQ prior to his departure overseas.

As usual, developments on the IARU and WARC 79 fronts were explained prior to the departure of the Federal President, David Wardlaw VK3ADW, and Peter Wolfenden to the IARU Region 3 conference in Bangkok and the former to the CCIR, SPM in Geneva later in October at which Michael Owen VK3KI will be sharing the time taken by the meeting.

Bruce Bathols reported on Publications Committee activities and the proposals for a special issue of AR for December.

WICEN training practices were examined and a position determined. The meeting lasted almost five hours crammed full with details on a wide range of subjects.

QSP

OPS! — CLANGER DEPT.!!

In our Editor's Note on page 45 "Letters to the Editor" last month, we stated that converting to EAST from GMT after daylight saving is introduced, was that we add 9 hours to the GMT figure.

Everybody knows that we add 11 hours, except for your Editor, who sometimes becomes most confused in simple matters like this.

Thanks to all who rang and let me know.

VK3UV

JIM'S SHACK

Ron Cook VK3AFW
7 Dallas Ave., South Oakleigh, Vic.

I leaned my bicycle against the garage wall and headed for Uncle Jim's shack at the rear. A burst of car ignition drifted to my ears as I tapped on the door. "It's Bill here, Jim," I called.

"Come in, sit down and tell me your news," was the reply.

"No news, really, although I did hear an interesting conversation on the repeater this morning."

"Go on, is that so?"

"Yes, these two fellows operating portable near the coast were discussing the use of a passive repeater system to enable simplex and repeater operation from their camp site back to the city. Seemed a bit far-fetched to me."

"Oh it could be done, Bill," said Jim, reaching for his electronic calculator. "Pass me that copy of 'Introduction to Radar Systems' by Skolnik. Now how far were these blokes?"

About 100 miles," I replied.

"I see, 160 kilometres or so. Well, I can demonstrate the feasibility of such a system but first we must make some assumptions. Let's assume the repeater site is 610 metres above sea level. For line of sight or free space conditions a hill at least 210 metres above sea level is required at the coast for the 160 km path. I used an old approximate formula that says the radio line of sight in miles is the square root of twice the height of the hill in feet. For metric distances we use $d(\text{km}) = 4.12$ by square root of height in metres."

"Now," continued Jim, "most likely this convenient hill is on the repeater side of

the camp site. This means that two antennae need to be put on top. Both should be at least 25 ft. or 8m high, one should point to the repeater and the other down to the camp site. It may be necessary to use two poles. Both aerials should be interconnected by a piece of low loss coax."

"Ah," I said, "one aerial receives a strong signal from the repeater and the second re-radiates the signal to the camp site which is in the shadow of the hill."

"Correct. Now if we can use this equation from the radar text," continued Jim, scribbling on a pad.

$$\begin{aligned} \text{Power density} &= \text{ERP}/(4\pi R^2) \\ \text{where ERP} &= \text{transmitter effective radiated power} \\ &= \text{Pt Gt} \\ \text{and Pt} &= \text{tx output in watts} \\ \text{Gt} &= \text{antenna gain factor} \\ &= \text{antilog (dB gain} - \text{dB feedline loss)/10} \\ R &= \text{range in metres} \\ \pi &= 3.142 \end{aligned}$$

"For a repeater ERP of 100 watts that gives 0.311 nanowatts per square metre on the hill. Let's see how many watts is captured by the antenna. I'll assume it has 13 dB gain at 146 MHz. This computes to a capture area of 6.81 square metres so the power available to be re-radiated is 2.09 nanowatts."

"That's real QRP," I said.

"Sure," replied Jim, "but let's allow 1 dB loss in the coax to the second antenna. That leaves 1.66 nanowatts to be re-radiated. Or 0.00166 microwatts if you prefer it expressed that way. Next assumption is that the camp site is 3 km from the

hilltop. That gives 294 attowatts per square metre at the camp."

"What watts?" I cried.

"It's not much," muttered Jim, continuing to punch his HP 25. "If I assume a 13 dB gain antenna at the camp and a 3 dB coax loss the receiver sees 0.22 uV. How about that?"

"Wow. But 0.22 uV isn't much of a signal on FM is it?"

"No," agreed Jim, "but quite useful on CW or SSB. Also remember that without the passive repeater on the hill the signals would be perhaps 40 dB below 0.22 uV. An extra 13 dB in the system would give saturation signals on any FM receiver. That means replacing each 13 dB antenna with 17 dB ones and improving the camp coax. The re-radiating antenna must be line of sight to the one in the camp of course and all antennas would have to be aligned to better than 5 degrees. Of course a 10 watt transmitter in camp would put a 1 uV signal into the repeater."

"The signals aren't exactly paralytic," I said, "wouldn't it be better to drive to the top of the hill?" I assume that it has a nicely graded and sealed road to the top."

"Yes, certainly signals would be better even with only a quarter wave from the hilltop. Perhaps the system's best application is as a TV relay. If a 20 to 40 dB gain linear IC amplifier were inserted in the hilltop coax it would help enormously," continued Jim. From the distant look creeping into his eyes I could see that one of his IDEAS was forming.

"Maybe 10 metres is open?" I said. "Come on, let's take a look."

QSP

WHAT IS YOUR TOWER DOING TO THE ENVIRONMENT?


CB — A new blockbusting phenomenon is reported in certain Texas towns, where "FOR SALE" signs proliferate wherever the hated 11 metre ground plane dominates a local rooftop. Vigilante counter measures reportedly used by an aroused citizenry range from tape recording the offending transmission and giving it back to the CB neighbour via 150 watts of stereo audio through an open 3 AM window, to putting a straight pin through the offender's coax, and waiting for him to turn on his linear. Thanks WABNGX, W6NIR, and PAARA Graphs, bulletin of the Palo Alto CAARA.

The Environmental Protection Agency in Washington, DC, is considering a regulation to limit the height of all self-supporting towers less than 2.5 square feet (base cross section) to 34 feet.

It seems that free-standing towers experience wind shear effects which shake the towers. It also seems that, especially in the late spring and summer, this shaking is transmitted to the surrounding earth. The vibrations disturb earthworms, causing them to come to the surface (often during the hottest part of the day). Exposure of the earthworm to the sun's direct rays causes them to die from sunstroke. Earthworms are very important facets of the ecology — hence the EPA's concern. Thanks to the Cascades Amateur Radio Society Action Mini-Mag, Jackson MI.

— From "The Lyrebird", Winter 1978.

(Pull the other leg, mate—Ed.)

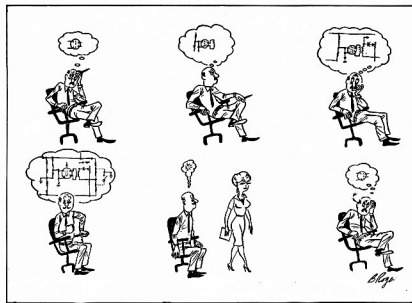

QUEENSLAND RADIO CLUBS WORKSHOP

QUEENSLAND RADIO CLUB WORKSHOP

The Queensland Division held its third annual Radio Club Workshop on 15-16 April, 1978, with 11 clubs represented. The Division sponsors a delegate from each affiliated radio club in the State to come to Brisbane to discuss club and Divisional problems, decide Divisional policies and to review and plan Divisional growth and activities.

The workshop in particular examined the motions to be discussed at the 1978 Federal Convention, set up a State-wide Education Sub-Committee and instituted a weekly Radio Club Liaison Net.

The WIAQ Council see the Radio Club Workshops and Club net as an essential part of its efforts to serve its members throughout the State. In addition the Division is currently investigating the commencement of a "Queensland Net" aimed at encouraging informal contact between Council officers and all members throughout the State.


Queensland Radio Club Net

Time: 1930 EAST each TUESDAY.

Frequency: 3605 kHz \pm QRM.

Net Control: VK4AWI. Radio Club Liaison Officer (VK4DT).

Participants: One station per club.

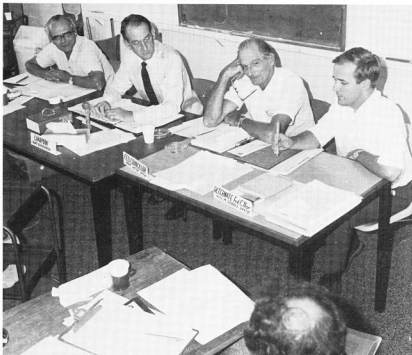

Top table at the Radio Clubs Workshops (from left) Qld. Div. President John Aarsse, Meeting Chairman Laurie Blagbrough, Federal Councillor Norm Wilson and Alternate Fed. Councillor Alex McDonald.

QSP

A NASTY SUBJECT

"Of course, periodically we all have a problem situation arise! One may occasionally be in an area where some unfortunate misunderstanding has occurred — where the air is a bit blue — where someone is 'Karchunking' a repeater — where a net is being interfered with — where music (?) comes in on the access frequency — or where someone just forgot the kind of manners amateurs are supposed to exhibit. If or when this occurs, let me urge you to be cool. A quick flick to another channel can keep you from getting in the middle. In addition, most malcontents soon run out of ugly things to say or do if the audience disappears or at least does not respond. It is sad when someone is on such an ego trip that they must disrupt nets, upset normal repeater operations or otherwise make our hobby less pleasurable than it should be. But, in my opinion, it makes more sense to change channels than to respond and seemingly encourage the offender. It has seemed that in areas of greatest problems that if users can totally disregard the interference by not even keying up the machine, the problem will ultimately disappear. Users are gradually learning that offenders thrive on arguments, angry words, hot tempers and even threats. Generally the purpose of such interference is to stimulate antagonism and without this kind of response, the antagonist receives no food for his sick ego and finally turns off the rig and wonders why, totally oblivious that he is being laughed at by cool operators.

"So keep cool and do whatever has to be done to meet the needs. If an alternate frequency and even Net Control is needed — QSY; if in a local raceway — switch to simplex or go QRT; whatever the case, cool it. It is a lot better for the ulcers and your reputation among peers."

Mac VK2AY, from "The Lyrebird".



Only a cold cup of coffee and few biscuits left on the afternoon tea trolley . . . and it was back to hard work by representatives attending the Qld. Radio Clubs Workshop.

THE SCIENCE MUSEUM STATION — VK3AOM

Ken Gillespie VK3GK



Ken Gillespie VK3GK, one of the week-day volunteers, using the FT501 at VK3AOM. The FRG7 and FT2 Auto can be seen to the right, while partly hidden to the left is the Heathkit Monitorscope.

(It is with regret to report that shortly after writing this article, Ken passed away — see Obituary, page 50—Ed.)

The cover photo of AR for May 1975 illustrates the equipment of VK3BWI housed in the Science Museum in Melbourne, while P9 tells a little about the station and includes a picture of the VK3BWI console which controls the transmitters.

This station is owned, maintained and operated by the Victorian Division of the WIA for the weekly broadcast to Amateurs and short-wave listeners.

In the same room, alongside this, is a completely separate station — VK3AOM. Here the equipment belongs to the science museum and is kept in going order by the museum Curator of Electronics. Manning is by volunteers of the WIA as often as it is possible. At the moment this is 4 out of 5 week days, and 5 week days during school holidays. Week-ends are a different matter, however. Because there is no full call operator on the premises, AOCOP volunteers are necessary. They attend one day a month and the required number of people is difficult to achieve because family commitments of working people come first. Currently two Saturdays and two Sundays are covered but the remaining ones are unmanned. The counter staff at the museum get asked about the station and when will it be open, etc., but there is nothing they can do about it.

The station is such good publicity for Amateur Radio that it is a pity to miss out on it by lack of volunteers. Since July 1st, the Director of the Museum has been making a reimbursement of \$4.00 a day towards fares and meals of those manning the station. Hopefully this might persuade some who otherwise may not consider coming forward. Anyone interested, please contact VK3AAQ, QTHR.

The only things common to the two stations are the HF dipoles, which when switched to VK3BWI, put the VK3AOM transmitter on dummy load. In this condition, transmitter wave form of both SSB and CW can be demonstrated to the public on the monitorscope (a Heathkit instrument) and the difference between all the power being used on CW (at the same time showing that it is purely an on/off mode) and only the voice peaks of SSB making use of maximum power, is easily seen by lay people.

The VHF transmitter of each station has its own aerial.

An FT501 is operated on 80, 40, 20 and 15 metres (the latter using the 40 metre dipole). 10 metres will load reasonably into the 80/20 metre dipoles which have a common feedline, while a 2 metre FT2Auto on four repeaters and three simplex modes illustrate line of sight operations.

An FRG7 general coverage receiver tunes the MF/HF spectrum and is most useful on the Marine HF bands to show MUF propagation. As coast stations worldwide transmit CW continuously on up to six frequencies simultaneously, it is easy to start on 22 meg and come down through 16, 12, 8, 6, etc., to locate the frequencies that are open to various distances and directions. This is simplified by the fact that these stations, when not transmitting traffic, are sending their call signs continuously so are easily identified. (This also points home the system of international call sign blocks). The observation that CW is used here also fascinates the visitors. Using the CW monitor on the FT501, morse code is demonstrated and the kids in particular get a great kick out of making their own initials. As the children, once shown, can do this easily, the parents and

other visitors see that it is not such a difficult thing after all. This is especially so if a series of Vs is made on the monitor and then the gain of the FRG7 turned up and people recognise the same sound sent by a coast station.

The most often asked question is "How much is all this?" and then the statement "Amateur Radio must be terribly expensive", this after they eye the gear at the station. Then explanations that it can be as cheap or expensive as people care to make it are brought forward, i.e., if an old radio is rebuilt into a two tube low power CW transmitter on 40 and/or 20 metres and a simple transistorised converter placed ahead of a broadcast receiver (a cheap one bought especially for the job, if nothing else), then world-wide communication is possible without spending much. A future step can be DSB suppressed carrier transmitter, and so on.

During the week, school groups come in and get a lecture graded to suit the class concerned. Contacts with stations, both overseas (when conditions are suitable) and locally, are undertaken and the children or other visitors encouraged to say a few words. The contacts must be short to hold the interest of lookers-on.

A big problem is to determine just how much to tell people who call in. If someone has a technical background, he does not want to be talked down to and, on the other hand, a completely lay person must not have things go over his head.

On the whole the exercise is very rewarding for the operator and is good PR for amateur radio generally. VK3AOM, which is designed to show radio, and amateur radio particularly, to the public, can be said to be a success. ■



EMONA electronics

Head Office, Sales & Service: 23 JUDGE ST., RANDWICK 2031. Ph. 398 6378
City Branch: ROOM 208/661 GEORGE ST., SYDNEY 2000. Ph. 212 4815
Cable Address: EMONA Sydney. A.H. CALL 398 6378

MAIL ORDERS: Box K21, Haymarket
NSW, 2000, Australia
WRITE, PHONE OR CALL IN!

NEW!

! AVAILABLE SHORTLY !
THE NEW DIGITAL H.F. TRANSCEIVER

DenTron DTR-1

WRITE FOR FULL SPECS.

NEW!



FRG-7
GENERAL COVERAGE
COMMUNICATIONS RX
\$339 ONLY

DIGITAL

NEW — AM-SSB-FM DIGITAL COMMUNICATIONS RECEIVER

DR-48
only
\$466

DIGITAL

FDH MULTI Palm II **NEW RELEASE!**

2m FM POCKET TRANSCEIVER

SPECIFICATIONS:

Transceive Frequency Range: 2 MHz in 144-148 MHz;
Transceive Channels: 6 Channels; Mode of Operation: FM;
Antenna Impedance: 50 Ohms unbalanced, BNC connector;
Power Requirement: 12V DC (Negative Grounded);
Power Consumption: Transmit 300 mA, Receive 100 mA,
Stand-by 25 mA; Weight: 1.03 lbs. (470g); Repeater Offset:
± 600 kHz; Modulation: Variable Reactance phase
modulation; Max. Deviation: ±5 kHz; Microphone:
Condenser Microphone; Receiver: Double conversion
superheterodyne (1st IF = 16.9 MHz, 2nd IF 455 kHz);
Sensitivity: —4 dBu (NQ 20 dB); Audio Output:
Maximum 0.5 Watts; Attachment: Rubber ducky
antenna, Nicad battery pack, DC cable with
cigarette lighter plug, Carrying strap.

DX-555D FREQUENCY COUNTER/SIGNAL GENERATOR

Featuring a 220 MHz counter upper limit and 30 MHz generator
upper limit. Generator frequency is read directly on the counter.
Technical Data: 10 Hz to 220 MHz counter; 0.4-30 MHz generator;
500 Hz tone oscillator; 2ms and 200ms gating time; 5 Digit LED display.
Switchable kHz and MHz. A Must for every Ham Shack.



\$229



\$220

GREAT PRICE REDUCTION ! ! ! !



MLA-2500

DenTron Radio has packed all the features a linear amplifier should have into their new MLA-2500. Any Ham who works it can tell you the MLA-2500 really was built to make amateur radio more fun.

- ALC circuit to prevent overloading
- 160 thru 10 metres
- 1000 watts DC input on CW, RTTY or SSB Continuous Duty
- Variable forced air cooling system
- Self-contained continuous duty power supply
- Two EIMAC 8B75 external anode ceramic/metal triodes operating in grounded grid
- Covers MARS frequencies without modifications
- 50 ohm input and output impedance
- Built-in RF wattmeter
- 117V or 234 VAC 50-60 Hz
- Third order distortion down at least 30 dB

\$1300
NOW \$1190

New FULLY LEGAL ANTENNA ROTATOR



MEDIUM-SIZED HAM ANTENNA ROTATOR — FU 400.

With approved power supply \$139
Additional Mast Clamps \$11
Stay bearings \$32
Constructed for long trouble-free operation. 200 kg vertical weight capacity. Extra heavy duty disc brake that prevents wind-milling.

INQUIRE ABOUT OUR SPECIAL ANTENNA/ROTOR PACKAGE !!

ANTENNAS GALORE

AT SPECIAL PRICES

AUSTRALIA'S LARGEST SELECTION OF BEAM ANTENNAS: 3, 4, 5 ELEMENT YAGIS, V-QUADS, Y-QUADS, etc.

Wilson — SY-1, 10-15-20m, 4 elem. Beam	\$339
Wilson — SY-2, 10-15-20m, 3 elem. Beam	\$279.
Cushcraft — ATB-34, 10-15-20m, 3 elem. Beam	\$289
Hustler — 4 BTW w/80m Resonator, Vert. Antenna	\$130

TRANSCEIVERS:

NATIONAL RJX 1011D	\$1990
YAESU: FT101E (NEW STOCK — END NOVEMBER)	\$899
FT301	\$930
FT301D	\$1090
FP301	\$175

TRIO KENWOOD: TS520S	P.O.A.
TS820	P.O.A.
TS820S	P.O.A.

ANNOUNCEMENT

NEW KENWOOD DIGITAL MOBILE TRANSCEIVER TS120 AVAILABLE SOON!

ALL OTHER KENWOOD PRODUCTS AVAILABLE !!!

LUNAR

HF3-100L2 Linear Amplifier	\$215
Bi-Linear VHF Models	\$259
28-432 MHz Low Noise Pre-amplifier	\$42
In Line Switching 2m Pre-amplifier	\$55
Oscar Box "J" Dual Freq., Oscar 8 Down Converter	\$99.90

MIZUHO

SX-99 RF Pre-amplifier	\$94
SX-1 Pre-selector	\$63
DX555D Counter Generator	\$220
KX-1 Coupler	\$56
KX-12 Marker	\$69
Pre-scaler for DX-555P	\$39

DENTRON ANTENNA TUNERS

MT-2000A	\$269.50
MT-3000A	\$447
160-10AT	\$186
Jr. MONITOR	\$104

NEW-NEW-NEW

National

RJX SERIES



\$1990

A Unique New SSB/CW Transceiver For Amateur Communications \$1990.00

There is no substitute for quality, performance, or the satisfaction of owning the very best. Hence, the incomparable National RJX-1011 amateur transceiver. The RJX-1011 covers all amateur bands 1.8-30 MHz (160-10 metres). It utilizes advanced Phase-Lock-Loop circuitry with dual gate MOS FETs at all critical RF amplifier and mixer stages. There's a rotating dial for easy band-scanning and an electronic frequency counter with digital readout and a memory display that remembers frequencies at the flip of a switch. And that's just the beginning. Matching speaker unit RJX-S1011 and complete external VFO RJX-V1011 also available.

For further information and specifications write, phone or call in!

FROM FDK OF JAPAN COMES THE LATEST MILITARY TECHNOLOGY AT AMATEUR PRICES, THE

Bigear VHF-UHF TRANSCEIVERS!

Type 1 — 2m FM SSB CW PLL SYNTHESIZED MOBILE BASE TRANSCEIVER \$694

- 144 - 148 MHz, PLL digital synthesizer system
- FM: 800 channels (5 kHz step)
- SSB: 400 channels (10 kHz step) plus VFO system (± 7 kHz)
- AC 117/240V, DC 13.8V, two-step power supply
- Digital display system (using a large-sized LED) provides reading up to six figures

Type 2 — 2m FM PLL SYNTHESIZED MOBILE TRANSCEIVER \$361

- 144 - 148 MHz, PLL digital synthesizer system (800 channels)
- A large-sized LED, digital display system provides readings up to six figures
- Easy-operating separate and selective mechanism displayed by the frequency unit for wider operation
- Transmitting output: 25W/1W, two-step selector switch




WRITE OR CALL FOR FURTHER SPECS!

RELAX AND ENJOY CW — Go RTTY Emona's Silent Way!

NEW INFO-TECH MODEL 200! \$668
A complete system that converts Morse, RTTY and ASCII to Video, using Fairchild F-8 Microprocessor Technology! A good receiver and video monitor are all that is required!

NEW INFO-TECH MODEL 300! \$564
A Microprocessor controlled, stand alone, keyboard that generates Morse, RTTY and ASCII codes.

NEW INFO-TECH RTTY EQUIPMENT:
Model 75 RTTY to Video Converter \$448
Model 150 RTTY Keyboard \$407



RF PREAMPLIFIERS FOR 3-30 MHz BAND:

Model SX-59 for use with transceivers.

SPECIFICATIONS:

Frequency range 3.30 MHz in 3 bands:
3-7, 7-14, 14-30 MHz
Gain 20 dB nom. (at 7 MHz), front
panel variable control
Attenuator — 20 dB attenuation selectable
from front panel control.
Imped. 50 or 75 ohm systems, UHF
connectors on rear panel



\$86

Order Your ROBOT Model 400 SSTV CONVERTER NOW!!



\$898

With the Robot 400 you just plug it into your transceiver, connect a TV monitor or your home set with the optional Robot RF adapter kit, tune to 14.230, and you're operating SSTV.

NEW!!

SCOPE/COUNTER/WATTMETER SWR BRIDGE

The most deluxe Black Cat[®] accessory. MONITOR SCOPE permits measuring RF output to antenna and viewing modulation patterns. Frequency Counter has six big LED digits, 1-50 MHz range (typical), 100 cycle readability, 50mV sensitivity. Peak-reading Wattmeter has 3 scales — 0-20, 0-200, 0-2000 watts. SWR Bridge reads standing wave ratios of 1.5, 2, and 3. Perfect for Ham base stations.

JB1001SFCM \$379.00



Model 333 dummy load wattmeter — Favorite Lightweight Portable — 250W RATING — Air Cooled. Ideal field service unit for mobile 2-way radio — CB, marine, business band. Best for QRP amateur use, CB, with zero to 5W full scale low power range.
Frequency Range: DC to 300 MHz
VSWR: Less than 1.3:1 to 230MHz
Power Range: 250 watts intermittent
Wattmeter Ranges: 0-5, 0-50, 0-125, 0-250
Connector: 50-239
Size: 4 in. x 7 in. x 8 in.
Shipping Weight: 2 lbs. **\$122**



B&W DUMMY LOADS-POWER METERS
Model 374 - 1500W - Oil Cooled \$199
Model 334 - 1000W - Oil Cooled \$167

ALL AMATEUR RADIO EQUIPMENT AVAILABLE ON 10% DEP. TO APPROVED BUYERS!

REVIEW OF THE YAESU FT225-RD

Ron Fisher VK3OM

Yaesu's latest two metre all mode transceiver, the FT-225RD, follows the styling of the FT-901 HF transceiver. It also includes some of the excellent innovations of the 901. In essential features the FT-225 is a restyled and updated version of the earlier FT-221 and FT-221R. It provides USB, LSB, AM, CW and FM modes with full tuneable coverage of the entire two metre band from 144 to 148 MHz. In addition to the tuneable coverage, eleven crystal controlled frequencies can be switch selected from the front panel. As the transceiver covers four one megahertz bands, this gives forty-four fixed channels. The crystals are optional extras. All the features of the earlier FT-221 series are included with the addition of some new and interesting operating aids. These include a full seven digit display frequency readout, Yaesu's new frequency memory system and fully variable power output control on the FM and CW modes. Power output has been increased from the 14 watts of the 221 up to 25 watts on FM and CW, with a rated output of 24 watts PEP on SSB and 8 watts of carrier on AM. All of these features have been packaged into an enclosure 280 mm wide, 125 mm high and 315 mm deep. This is the same frontal size as the FT-221, and an additional 20 mm depth over the 221 being used up with a deeper front panel moulding and a slightly increased heat sink size on the rear to cope with the higher power. Total weight has only gone up by .5 kg to 9 kg.

In our review of the FT-221 in the June 1976 issue of *Amateur Radio*, the styling of that transceiver came in for some criticism, in particular the very poor "S" meter. Let me say right away that the appearance of the FT-225 is excellent and the "S" meter has increased in size and readability to one of the best in the business. The scale is now translucent with two globes providing rear illumination. The intensity of illumination for the "S" meter and the digital readout can be dimmed with a front panel push button. Other new features are a push button receiver RF attenuator and a "TUNE" control to peak the transmitter and receiver outputs. No calibrator is provided on the digital readout version, although it appears that a non-digital model might be available in the future and this will have a calibrator fitted. The operating switch for this would appear to replace the AGC fast/slow selector on the digital model.

Other normal features carried forward from the FT-221 are 600 kHz repeater offset for both normal and reverse operation, full VOX operation for all modes, side tone for CW, clarifier for receive and also transmit/receive, meter switchable for "S" readings or centre discriminator current and relative power output on transmit. A tone burst generator for repeater access is



included but of course not required for Australian repeaters.

Numerous circuit changes have been made to the 225 circuit as compared with the 221, the most obvious being the VFO coverage of one megahertz per range as against the five hundred kilohertz of the 221. The receiver front end has been improved with the substitution of a 3SK51 dual gate FET for the single gate FET in the 221. This gives the receiver noticeably better performance with strong signals. Spurious signals produced in the 221 at our test location by the extremely strong Melbourne channel two repeater are not noticeable on the 225. A new IC type balanced demodulator replaces the four diodes as used in the 221 and this gives cleaner audio output in the SSB mode. The front panel microphone gain control now only controls the SSB and AM mic. level. The FM microphone level is now an internal preset control.

Unfortunately some of the shortcomings of the 221 have been perpetuated in the 225. The 3.5 mm headphone socket is still there on the front panel, making it non-compatible with normal headphones. You can of course plug in your transistor ear-piece. With the meter in the discriminator position, the zero point still drifts. In fact it seems somewhat worse than the FT-221. Perhaps this is made more obvious by the larger and clearer meter but on our review model it took nearly an hour for the zero point to stabilise. Also the range of this function is still very limited with a meter movement of about 3 mm to indicate a 5 kHz offset. This makes it rather hard to accurately set the transceiver to frequency in the FM mode. Also when operating FM there is no guarantee that the transceiver is actually transceiving. This is dependent on the setting of the 10.7 MHz FM carrier generator and in fact the transmit and receive frequencies can be several kilohertz apart. Our sample transceiver had been carefully set up though and the actual off-

set was less than 500 Hz, which is quite acceptable. Strangely the otherwise excellent instruction manual does not give any mention to the setting of the 10.7 MHz FM carrier oscillator.

The new Yaesu memory system is an excellent and useful feature. It enables any required frequency to be entered into the system and then recalled for either transmit or receive or both. Two examples of its use would be to have your favourite FM simplex channel set up in the memory and your usual repeater set up on the dial. A flip of the SELECT switch enables either be selected. As the memory operates with the VFO only, the memorised frequency will change up and down in one megahertz steps with changes of the band switch. Again the instruction book gives little mention to the theory of operation of the memory. It does not even include a circuit of it.

THE FT-225RD ON THE AIR

With its built in AC power supply there is no problem in getting on right away. Only an antenna is required.

The 225 can of course be operated from a 12 volt DC supply as well, but my guess is that most of them will sit on the desk at home as a base station. No mobile mounting bracket is mentioned in the instruction manual and in any case it is a fairly hefty package to be hung under the dash. All of our tests were carried out using the AC power supply only. The digital readout is bright, fairly large and in all easy to read. The readout is to the nearest 100 Hz and is very accurate. As is usual with Yaesu gear, the frequency changes when the opposite sideband is selected, but the readout instantly shows this and it is simple to re-tune to the required frequency. First thing noted on receive was the excellent audio quality. The built in speaker has been positioned facing upwards in the transceiver top cover in contrast to the downward facing speaker under the FT-221. Received audio

is noticeably better in all modes compared with the 221.

The dual speed tuning has now been provided with a finger hole which is both an advantage and a disadvantage. Using the rear or fast tune knob was awkward as the finger hole on the front slow tuning knob extends to a slightly greater diameter than the knob itself and on every rotation knocks against the fingers when extended for the rear knob. With the one megahertz coverage quite a bit of knob turning is needed to cover the range. The push button controls for the noise blanker, receive attenuator, display and meter dimming, memory and tone burst were smooth and easy to operate. Each is accompanied by a small red LED to indicate its status. Transmitted audio was smooth and clean in all modes but reports suggested a slight lack of high frequency response. We arranged for a transmission to be taped along with several other transceivers and it appears that these reports were right. In order to check the microphone, we plugged in the FT-221 mic, and discovered yet another way to wire a standard Japanese four pin connector. They are just not compatible. To date I think I have

found four ways used by various manufacturers to wire up these connectors.

Power output was checked with our Horwood power meter and found to be spot on the specified figure of 25 watts in all modes except AM, where it was almost exact at 7.5 watts. When transmitting SSB it was found that the effective output could be increased somewhat by pushing the audio gain up above the normal setting. This appears to produce some RF clipping in the final stage and give more talk power. However, before trying this, check it out with your nearest two metre neighbour in case it produces excessive splatter.

Assuming that some amateurs might purchase the FT-225 without the digital dial, a check was made of the analog dial calibration. The one kilohertz indications have been moved on to the tuning knob skirt and so are not illuminated. The 100 kHz increments are to the rear of this and lit in a soft blue colour. The whole thing looks very pretty but perhaps not as practical as the old FT-221. Over the one megahertz range accuracy was within one kHz. This is excellent but it should be remembered that recalibration

is required when changing modes. The kilohertz dial is set to the right frequency held in place while the tuning knob is turned to give the right actual frequency.

INSTRUCTION BOOK

Two mentions have already been made to this in the preceding text, however in most respects it is well up to what we have come to expect from Yaesu. The book is very well illustrated with most adjusting points clearly shown. A full circuit diagram is provided with everything except the memory unit. This is shown as a secret box with external connections only. One point not often covered in manuals these days, and certainly not mentioned in this one, is the replacement of dial lamps. The positioning and replacement of these is not always obvious and often they are the first things to fail in equipment. As I have found out, suppliers don't always know how to replace them either.

The Yaesu FT-225RD used in our review was loaned by Mr. Fred Ball of Ball Electronics Services, Box Hill North, Victoria. Balls have full servicing facilities for the FT-225RD and, incidentally, know how to replace the dial lamps. ■

DEVELOPING COUNTRIES OF FREQUENCIES

The needs and allocation of spectrum space "are at variance between the developing and the more developed countries", says a recent editorial in the journal of the Asian Broadcasting Union. "In countries with poor or meagre communications, the need for extensive broadcasting coverage is essential for social and economical growth." The education and unification of a community can be efficiently achieved by radio and TV, but other telecommunications services are yet to be developed "and progress can be frustratingly slow. Although there are over 358 million telephones in the world, only 65 million of them are in Asia, Africa, Central and South America. Radio and television are vital to these areas and (results) can often be obtained faster through these services than by other means. Consequently their demand for spectrum has become acute."

The editorial, in the January 1978 issue, is written in the context of the prospects for the 1979 World Administrative Radio Conference, and it will add weight to the arguments of those who believe that there will be great pressure from the developing countries for a more favourable distribution of the spectrum in those countries.

The journal notes that broadcasting coverage in the developed countries has reached saturation. Of the world's 25,500 radio broadcast transmitters, 75% are in the developed countries, and America has 1,790 receivers per 1,000 inhabitants, while the developing countries have only 76 per 1,000. Radio use in the developed countries has become so extensive that technology is aimed at developing methods

"DEPLORE" WESTERN RETENTION

to remove certain services from radio altogether and put them on cables and wires, "making room for the expansion of new and existing services which can only exist by means of radio propagation". Yet some users "tenaciously maintain their hold over (their previous allocations) for variously described 'back-up' or 'stand-by' purposes. . . . In today's overcrowded spectrum where space is at a premium this selfish dog-in-the-manger policy can only be deplored."

The editorial presses for the WARC to dispense with the "artificial ITU geographical zones" and the adoption of new zones based on development, economics and need. It goes on to add that, on these grounds, the developing countries are more deserving of the LF, MF and HF bands, since these "provide the only economical and direct means of reaching a large audience. . . . The HF bands provide the only presently available method for world-wide broadcasting, without any apparent alternative, as well as providing the most economical means for internal coverage of the large developing nations."

Single-sideband modulation would mean the re-equipment of a large audience with new receivers, and satellite broadcasting will take many years to develop and will be limited to national coverage.

Short waves are the only alternative for world-wide broadcasting. To alleviate overcrowding in this band elbow room in the allotted spectrum will have to be found, and this will be had at the expense of the fixed services. This would involve only expenditure on the part of the sender and

the recipient of the point-to-point fixed services, as opposed to prohibitive expenditure in equipping the world's population with new receivers.

An article elsewhere in the journal points up the greater emphasis in the developing countries on frequencies below 30 MHz. In the lobbying for WARC it has been mentioned that the broadcasters have 60 per cent of the usable space above 30 MHz, while Mr. Irfanullah of the Pakistan Broadcasting Corporation notes that broadcasting claims 9.5 per cent of the spectrum in his region, while fixed and mobile services together have 85 per cent of the allocations. Totals like that convey the reasons for the editorial's impatience to cut the fixed portion (49 per cent) down to size. But there is little indication of the way the proportions allocated to each use within the HF band have been worked out.

The emphasis on short wave for world-wide broadcasting arises from the desire to convey cultural and political ideals to the rest of the world. This sensitivity to the way the West sees the developing world was also reflected in the suggestion last year that there should be alternatives to the news reporting of the international news agencies, such as Reuters, UPI and AP. In addition, a conference of the non-aligned nations' broadcasting organisations was held in Sarajevo last October "to consider the ways and means by which broadcasting organisations could co-ordinate to project the image of member countries to each other and to the world at large." There is no doubt that all eyes were fixed on WARC 79.

From Wireless World, April 1978. ■

PORTABLE ARMY WIRELESS SETS OF WORLD WAR II

3. The Type 3 Mk II is commonly known as a spy or suitcase radio; these sets are often seen in WW II films. The sets work from a variety of power sources, 6 volts DC, 110 or 24 volts AC. The transmitter is a CW only unit, although the receiver can receive AM and CW. The transmitter has a 6L6 PA valve and has an output which varies between 15 and 20 watts over a frequency range of 3 to 15.5 MHz. The transmitter is crystal controlled and the receiver is a tuneable superhet with an IF of 470 kHz.

Soon after the close of WW II these sets were eagerly sought after by amateur radio operators as they were compact, versatile and able to be used as is without any modification. However, many of these sets were extensively modified and performed well on the amateur bands, particularly in portable situations. The set when packed in its waterproof boxes weighed 25.3 kilograms. A variety of methods were used to charge the 6 volt batteries commonly used with these sets such as a wind generator, hand generator, pedal and cycle adaptor generators, petrol driven generators and last but not least a steam powered generator. The steam generator consists of a boiler which is suspended in a brazier, coupled to a twin cylinder steam engine which is connected directly to the generator. At a steam pressure of 30 to 35 pounds a 6 volt battery is charged at 4 amps. The consumption of water was 2 litres per hour and burnt 7 to 9 kilograms of wood. Not particularly economic. I saw one of these steam generators a few years ago at a steam rally in Wantirna, 25 kilometres east of Melbourne.

4. The Type A Mk III is commonly known as a spy or suitcase radio, and is commonly seen in WW II films. The set works from a variety of power sources, 6 volts DC and 110 or 240 volts AC. The transmitter is a CW only unit, although the receiver can receive AM and CW. The transmitter has a 6C5 in the final and puts out 4 to 5 watts in the frequency range 3.2 to 8.55 MHz. The set has 5 valves all told crammed into a cabinet 8 cm deep, the actual size of the set can be gauged by comparison with a matchbox. The transmitter is crystal controlled and the receiver is a superhet with a regenerative IF on 1215 kHz and is continuously tuneable over virtually the same frequency range as the transmitter.

The set and all the spares, but less the waterproof case, weighs in at 7.7 kilograms. These sets did not seem to be as popular as the Type 3 Mk. II with amateurs, but a number of them were modified and performed quite satisfactorily. An intriguing little set, simple to operate and worked well. ■

Compiled by R. Champness VK3UG

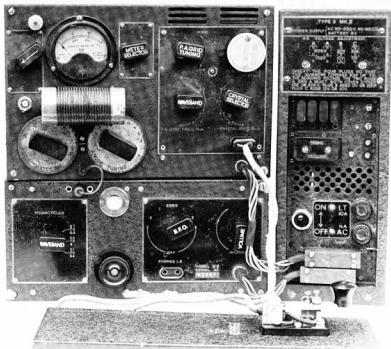


Photo No. 3 — Type 3 Mark II.

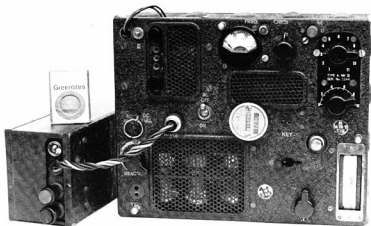


Photo No. 4 — Type A Mark III.

REMEMBRANCE DAY CONTEST — 1978

OPENING ADDRESS

BY HIS EXCELLENCY THE GOVERNOR
OF WESTERN AUSTRALIA

AIR VICE MARSHAL SIR WALLACE KYLE

"CQ RD, CQ RD". This will be a familiar sound in Morse code and radio telephony to thousands of amateur radio operators and short-wave listeners throughout Australia and New Zealand during the next 24 hours of the Remembrance Day Contest.

As patron of the Western Australian Division of the Wireless Institute of Australia, I commend to you this 31st Contest. It has the dual purpose of enthusiastic participation in an enthralling hobby and the opportunity to pay tribute to those of your own fraternity who offered their skills and their services and, in some cases, their lives in time of need.

Indirectly, of course, it serves another very important need these days — it brings together fellow enthusiasts regardless of colour or creed and it makes a positive contribution to world union and fellowship.

The speed and accuracy of communications will improve technically with time and this will happen whatever we do, but understanding is something which needs the constant and active attention of all men and women and I believe that the friendly but highly competitive spirit of this contest is just such a positive contribution.

As you go forward into the next 24 hours, pause briefly to reflect on this contest as a splendid memorial to those 35 members of the amateur radio service who died in serving their country in World War II, and having done that enjoy this contest as I am sure they would wish you to do.

Be enthusiastic about it as they would have been had they still been with you. It is in this spirit that I now have great pleasure in declaring the 1978 Remembrance Day Contest open.

73s to you all.

AMATEUR SATELLITES

Bob Arnold VK3ZBB

AMSAT OSCAR 7

Disturbing news has been received from AMSAT on the condition of the batteries on board OSCAR 7.

Details are not known but it is possible one cell is not charging or a voltage controller is defective. As from 7th October, OSCAR 7 was placed permanently on Mode A to conserve power, and we all

hope the problem will be resolved and in due course the satellite will revert to normal operation. Listen to signals on 29.502 MHz for further information.

OPERATIONS

Activity on OSCARS 7 and 8 in Mode A continue at a high level with a good selection of ZLs and VKs to work.

Communication on Mode J of OSCAR 8 is still limited but a few stations continue to make reasonable QSOs.

OSCAR 8 REFERENCE ORBIT

The latest reference orbit which corrects orbit time previously reported is:—

Orbit 2725 EQX 0141 GMT at 64.4 degrees west.

OSCAR 7 PREDICTIONS

Have you noticed how OSCAR 7 is drifting westwards? Early this year the first orbit of the day was on occasions only 55°W. Now the nearest approach to the meridian is 60°W. In thirty years hence the day's first orbit will commence due north of Australia!

THE IC202 ON LSB

In September AR details were published of a method of converting the IC202 to receive signals on LSB.

Michal L. Alas F10K has now published a simple method of achieving the same result without an additional crystal oscillator. This can be found in AMSAT Newsletter for September 1978 and in Radio Communication (RSGB) September 1978 (Technical Topics Section).

ORBIT PREDICTIONS — DECEMBER 1978

OSCAR 7					OSCAR 8				
Date	Orb. No.	Eqx	Eqx	GMT ±W	Mode	Orb. No.	Eqx	Eqx	GMT ±W
1	B	18485	0009	63	A	3771	0119	60	
2	A	18508	0103	76	J	3785	0125	61	
3	B	18520	0002	61	J	3799	0130	62	
4	B	18533	0057	75	A	3813	0135	63	
5	A	18546	0151	88	A	3827	0130	65	
6	B	18558	0050	73	A	3840	0002	41	
7	B	18571	0145	86	A	3854	0007	42	
8	B	18583	0044	71	A	3868	0012	43	
9	B	18595	0138	85	J	3882	0018	44	
10	B	18608	0038	70	J	3896	0023	45	
11	A	18621	0132	84	A	3910	0028	47	
12	B	18633	0031	68	A	3924	0033	48	
13	B	18646	0126	82	A	3938	0038	49	
14	A	18658	0025	67	A	3952	0044	51	
15	B	18671	0119	80	A	3966	0049	52	
16	B	18683	0018	65	J	3980	0054	53	
17	A	18696	0113	79	J	3994	0059	55	
18	B	18708	0012	64	A	4008	0104	56	
19	B	18721	0106	77	A	4022	0109	57	
20	A	18733	0006	62	A	4036	0115	59	
21	B	18745	0100	76	A	4050	0120	60	
22	B	18759	0154	90	A	4064	0125	61	
23	A	18771	0054	74	J	4078	0130	62	
24	B	18784	0148	88	J	4092	0135	64	
25	B	18796	0047	73	A	4106	0141	65	
26	A	18809	0142	86	A	4119	0044	41	
27	B	18821	0041	71	A	4133	0009	42	
28	B	18834	0135	85	A	4147	0014	43	
29	A	18846	0035	70	A	4161	0019	44	
30	B	18859	0129	83	J	4175	0024	45	
31	B	18871	0028	68	J	4189	0029	47	

SUPPORT OUR ADVERTISERS

WHEN PURCHASING GOODS,
SAY YOU SAW THEM ADVERTISED IN AR

WICEN

Ron Henderson VK1RH

Federal WICEN Co-ordinator,
53 Hannaford St., Page ACT 2614
Ph. (062) 54 2059, A.H.

The introduction of distinctive WICEN call signs is very much a divisional matter, compiled with P. & T. co-operation.

The situation at the time of writing is:

A.C.T.: Uses VK1WI "WICEN Net Control".

N.S.W.: VK2WIA, VK5WIE and the WICEN net control call signs and several regional WICEN call signs in the VK2WIA-WIZ group have been requested.

VIC.: No information available.

QLD.: VK4WIT Townsville, VK4HM Cairns and VK4WIM Mackay, are used for WICEN purposes. VK5WIE is the WICEN net control call sign.

W.A.: VK6DY is the WICEN net controller.

TAS.: No information available.

N.T.: VK8DA is in use for WICEN purposes.

Wednesday evening is becoming the WICEN net night, VK2WIA, VK5WIE and VK6DY, in that order, can be heard conducting nets on 3600 kHz as the evening progresses. A good scheme for the passage of information, let's support it.

A SIMPLIFIED GUIDE TO EMERGENCY OPERATING

Aim
To provide the ordinary amateur radio operator who has had no WICEN training with a simple guide to emergency communications for use when caught up in an emergency situation.

Needs of Emergency
This guide is devoted to the situations where the amateur operator has to bridge the gap in normal communications in a hurry. He is then linking an emergency site or disaster area with the "outside world" and its normal communications.

Operator Actions
The amateur operator should call on the most suitable band — on the WICEN-designated frequencies listed below, to establish initial contact. If no contact results, use any frequency in use to stimulate a reply.

The operator should declare his call an emergency call by using one of the words below, and should not be put off if he receives replies from anywhere but the desired direction, for skip may preclude the direct path and relay procedure may need to be employed.

Responding Station Actions

Responding stations should answer an emergency call but relinquish "hold" if a more direct circuit or link can be arranged, however they should remain on LISTENING WATCH and monitor the circuit.

WICEN CALLING FREQUENCIES

WICEN calling frequencies are as follows: 3600 kHz, 7050 kHz, 14100 kHz.

Secondary frequencies will be spaced: +25 kHz for SSB, —25 kHz for CW.

VHF calling frequencies are: Channel 50 (146.5 MHz FM), available repeater channels.

PROWORDS

Mayday — (SOS in CW) —

The station sending is threatened by grave and imminent danger and requests immediate aid.

PAN — (XXX in CW) —

The station has a very urgent message to transmit concerning the safety of ship, aircraft or person.

WICEN —

The sending station wishes to set up a Wireless Institute Civil Emergency Net or link.

STATE WICEN CO-ORDINATORS:

A.C.T.: VK1ZJR, 19 Gungahra Cres., Rivett, A.C.T. 2611, Ph. (062) 86 5624, A.H.

N.S.W.: VK2NL, c/- Wireless Institute Centre, Crows Nest 2065, Ph. (02) 665 7434.

VIC.: VK3AED, Lot 8, Ballarto Rd., Skye, Vic. 3977, Ph. (03) 647 3877.

QLD.: VK4ZMG, OTHR.

S.A.: VK5BW, QTHR, Ph. (08) 503555.

W.A.: Sid Jenkins L60206, QTHR, Ph. (09) 349 6909, A.H.

TAS.: VK7RR, QTHR, Ph. (002) 23 7454, A.H.

N.T.: Darwin Amateur Radio Club, P.O. Box 37317, Winnellie 5789.

Transverter Model MMT 432/144'S'

UTILIZING AN IF OF 144MHz * 10 WATTS DRIVE OF 1/2 WATT * VOX OPERATED, TWO SELECTABLE RANGES
FEATURES EXTENDED COVERAGE FOR OSCAR 8

This 432 solid state linear transverter is intended for use with a 144 MHz transceiver to produce a high reliability transceive capability. A 10 watt load and RF sensing network eliminates the need for any ancillary circuitry. A single coaxial connection is all that is required between the transverter and the associated 144 MHz transceiver.

A wide range of applications is offered by the MMT432/144 transverter, which by virtue of its linear mode of operation will enable 144 MHz SSB, FM, AM or CW equipment to be used at 432 MHz. to 436 MHz.

Simply connect direct to your 2 metre rig, 12 volt supply, fit 70 cm antenna for instant SSB, FM, AM, CW operation, coverage 432-434/434-436 in two ranges.

FEATURES: High quality double-sided glass fibre printed board * Highly stable zero controlled oscillator stages * PIN diode aerial changeover relay with less than 0.2 dB through loss * Extremely low noise receiver converter, typical 3 dB * Separate receive converter output gives independent receiver facility * Built in Automatic RF VOX with override facility * Built in 10 watt 144 MHz termination, selectable attenuator for 1/2 watt * Use of the latest state of the art Power Amplifier transistors provide reliable 10 watts continuous output

MODEL MMT432/144 'S' Price \$295

Transverter Model MMT 432/28'S'


FEATURES EXTENDED COVERAGE FOR OSCAR 8

Second Crystal Oscillator gives two ranges: Low 432 - 434 MHz - High 434 - 436 MHz. Programming available to either Transmit/Receive both Low, both High, or a mixture of the two. Adjustable Drive Level is now provided by an input potentiometer. Optional RF VOX.

Power Output 10 watts minimum * 28 MHz IF * Drive 1 mW to 500 mW * Aerial Changeover by PIN diode switch * Modern Microstrip Techniques * Power requirements 12 volt nominal at 150 mA 2.5 amp. peak * Case size 187 x 120 x 53 cm * Spare 432 input socket.

MODEL MMT 432/28 'S' Price: \$245

MODEL MMT 144/28 Price: \$185



100 Watt 432MHz

MML 432/100

Price \$395

Linear Power Amplifier

- * 100 watts minimum output 10dB minimum gain
- * Fully protected against poor load VSWR, overheating and excessive or Reverse Railg

- * Equipped with RF VOX and manual override.
- * Frequency Bandwidth 435 MHz- 15 MHz @ -1 dB.
- * 10 watts nominal input for 100 watts output.

DUAL RANGE 432 - 434 MHz & 434 - 436 MHz CONVERTER

TYPE: MMC 432/28 'S' & MMC 432/144 'S'

Price: \$67.00

FEATURES:

- * Extra Range (434-436 MHz) For Satellite Reception
- * Ultra Low-Noise First RF Amplifier Stage
- * Highly Stable Zener Diode Controlled Crystal Oscillator and Multiplier Stages

SPECIFICATIONS:

- Input frequency ranges: 432-434 MHz (low) 434-436 MHz (high)
- I.F. output frequency: 28-30 MHz or 144.146 MHz
- Typical gain: 30dB
- Noise figure: 3dB Maximum
- D.C. Power requirements: 11-13.8 volts 12.5V nominal 50 mA Maximum
- Current consumption: 50 mA Maximum



BNC CONNECTORS - Excellent quality, fully imported from U.K. - U.S. Mil. No. UG88E/U. Price: \$1.35 each.

NEW READY-TO-OPERATE MODULES AVAILABLE IN THE SALES PROGRAM OF VHF COMMUNICATIONS.

All modules are enclosed in black cast-aluminium cases of 13cm by 6cm by 13cm and are fitted with BNC connectors. Input and output impedance is 50 ohms. Completely professional technology, manufacture, and alignment. Extremely suitable for operation via satellite or for normal VHF/UHF communications.

6 METRE MOSFET CONVERTER

Featuring 24 MHz local oscillator output for transverter use:

- Input frequency: 52-54 MHz
- I.F. Output Frequency: 20-30 MHz
- Typical Gain: 30 dB
- Noise Figure: 2.5 dB
- Typical Image rejection: 65 dB
- Crystal Oscillator Frequency: 24 MHz
- Power requirements: 12 volt ± 25% at 35 mA.

MODEL MMCS2/28LO Price: \$49.00

CONVERTERS PACK & POST \$2.00

1296 MHz CONVERTER

- Microstripline, Schottky diode mixer.
- IF: 28-30 MHz or 144-146 MHz
- Noise figure: typ. 8.5 dB
- Overall gain 25 dB
- Power Requirements: 12 volts DC ± 25% at 50 mA.
- Price: \$65.00
- 500 MHz COUNTER Model MMD050/500 Price \$175

AMATEUR ELECTRONIC IMPORTS IS THE EXCLUSIVE AUSTRALIAN DISTRIBUTORS FOR THESE PRECISION BRITISH MADE UNITS FROM MICROWAVE MODULES LTD.

144 MHz MOSFET CONVERTER

- Noise figure: typ. 2.8 dB.
- Overall gain: typ. 30 dB.
- IF: 28-30 MHz, 9-15 V 20 mA.
- Price: \$45.00
- VARIATOR TRIPLER 432/1296
- Max. input at 432 MHz, 24 W (FM, CW) - 12 W (AM)
- Max output at 1296 MHz: 14 W
- Price: \$74.00



All prices subject to change without notice. Onwards forwarding please add sufficient for freight or postage. Excess will be refunded.

Amateur Electronic Imports

P.O. BOX 160, KOGARAH, N.S.W. 2217
TELEPHONE: (02) 547-1467
CABLE: "AMATEURIMPORT, SYDNEY"

AMATEUR RADIO ACTION

IS THE NEW GENERATION AMATEUR MAGAZINE



SUBSCRIBE NOW!

DON'T MISS OUT on your copy of *Amateur Radio Action*. There's only one way to be really sure that you will receive each and every copy of *Amateur Radio Action* — and that's by enrolling on our subscription lists. And it won't cost you any more than buying one at the news-agent. That's right, we are offering 12 issues

for only \$12 post free.

Simply fill out the coupon below, enclose a cheque/money order/postal order for \$12 and you will be put on our subscription list to receive the next 12 copies of **AMATEUR RADIO ACTION** through the post.

Please put me down for 12 editions of *Amateur Radio Action*, starting NOW!

RATES: Within Australia and surface mail overseas:

\$12.00

Air mail to New Zealand and Papua New Guinea:

\$A29.40

Air Mail to USA and Europe: \$A46.20

Herewith enclosed cheque/postal note/money order to the value of: \$

Name

Address

Postcode

Post to: *Amateur Radio Action* Subscriptions, Box 628E, Melbourne 3001.



A big wave maker in the world of amateur radio ... FT-101E HF transceiver



**from Yaesu
and Bail — New shipment with more effective noise blanker
exclusive to Bail Electronic Services.**

The success story of the export quality FT-101 must make world amateur radio history. First produced in 1970 the FT-101 has been refined and improved to make it better than best for your money. The latest FT-101E represents tried and proven performance and real value. You'd have to say it will be the best selling HF amateur transceiver in the world.

The FT-101E can be modified to suit novice requirements.

It comes complete with a more effective noise blanker specified by, and exclusive to, Bail Electronic Services; R.F. Speech Processor, Calibrator, matching Yaesu Hand Microphone, eight pole SSB filter, 12v DC-DC converter as well as 234v AC operation with Australian approved 3 core cable and 3 pin plug, factory produced English language handbook (not a photo-copy!), spare plugs and connectors, etc.

Features:

- Built-in AC & DC power supplies
- Built-in RF-speech Processor for increased talk power (E model only)
- 260 Watts PEP SSB, 180 Watts CW, & 80 Watts AM
- Factory sealed, solid state VFO for optimum stability and accurate 1 kHz readout
- Effective Noise Blanker, threshold adjustable, for elimination of noise spikes
- Built-in, fully adjustable VOX
- Automatic break-in CW operation with sidetone
- Selectable 25 kHz and 100 kHz calibrator
- ± 5 kHz receiver clarifier w/separate ON/OFF switch
- Built-in WWV/JJY reception
- Heater switch to shut off final tubes for conservation of current drain
- Reliable easy to operate lever switch
- Adjustable carrier level for tune-up and novice operation
- Built-in speaker

- High-Q, permeability tuned, RF stages to provide the performance required even in base station operation
- Includes dynamic, hand-held type microphone
- Indicator lights for internal VFO and clarifier operation
- Eight pole SSB filter for unparalleled selectivity on today's crowded bands
- All-mode operation — SSB, CW, & AM
- Built-in internal crystal control provision and Dual VFO adaptor
- Complete line of compatible accessories for flexible station design

FT-101E

90 Day Warranty

Write for New Yaesu Catalogue detailing this and other sets in the Yaesu range. Please include 50c postage.



**ELECTRONIC
SERVICES**

FRED BAIL VK3YS
JIM BAIL VK3ABA

60 Shannon St., Box Hill North,
Vic., 3129. Ph. (03) 89 2213

Yaesu agents in Australia since 1963

Radio amateur equipment from B.E.S. also sold by —

W.A.	Radio Communication Services, H. R. PRIDE, 26 Lockhart St., Como, 6152	Ph. 450 4379
	WILLIS TRADING CO., 429 Murray Street, Perth 6000	Ph. 21 7609
S.A.	FARMERS RADIO PTY. LTD., 20 Stanley St., Plympton 5038	Ph. 293 2155
TAS.	G. T. ELECTRONICS, 131 Westbury Rd., South Launceston 7200	Ph. 44 4773
	PRIMS RADIO, 123 Argyle Street, Hobart 7000	Ph. 34 6912
	J.D. ELECTRONICS, 64 Wentworth St., Launceston 7200	Ph. 44 5000
N.S.W.	Aviation Tooling, STEPHEN KÜHL, 104 Robey St., Mascot 2020	Ph. 667 1650
	Amateur & Novice Comm. Supplies, W. E. BRODIE, 23 Dalrymple St., Seven Hills 2147	Ph. 624 2691
	DIGITRONICS, 166 Parry St., Newcastle West 2302	Ph. 69 2040
	RIVERCOM, Sid Ward, 9 Copland St., Wagga Wagga 2650	Ph. 21 2125
QLD.	H. C. BARLOW, 92 Charles St., Aitkenvale, Townsville 4814	Ph. 79 8179
	MITCHELL RADIO CO., 59 Albion Rd., Albion 4010	Ph. 57 6830
A.C.T.	QUICKTRONIC, Jim Bland, Shop 11, Altree Crt., Phillip 2606	Ph. 81 2824
		82 2864



New Release — FRG-7000

Advanced Communications Receiver . . .
for the discerning radio
enthusiast **\$695**

Yaesu, the leader in quality communications equipment, proudly introduces the FRG-7000: a high performance general coverage receiver for the discriminating shortwave listener.

Features:

- **Full MF/HF Coverage** . . . from 0.25-29.9 MHz, with provision for SSB and AM voice, as well as CW reception.
- **Digital Frequency Display** . . . gives resolution to 1 kHz, using large, bright LED's for maximum readability.
- **Digital GMT/Local Clock** . . . can be set to your local time plus GMT time. Just flick a switch for selection of the desired time.

- **CPU Clock Timer** . . . clock contains a timing feature that activates the receiver and internal relay contacts. Set the time you want to start and stop recording, hook up your tape recorder, and your FRG-7000 will do the rest.

- **Advanced Technology** . . . an FET front end provides excellent sensitivity, and the "Wadley Loop" heterodyne oscillator yields rock-solid stability.

- **AM Noise Limiter** . . . provides noise-free reception in the AM mode, and the amplified Automatic Gain Control circuitry minimizes distortion due to fading.



- **Human Engineering** . . . ease of operation is ensured by careful selection of positions for controls and switches. You'll never own a receiver that's easier to use.

GENERAL

- **Frequency range:**
0.25 — 29.9 MHz
- **Modes of operation:**
AM, SSB, CW
- **Sensitivity:**
SSB/CW — Better than 0.7 μ V for S/N
10 dB AM — Better than 2 μ V for S/N
10 dB (400 Hz 30% modulation).
- **Selectivity:**
SSB/CW ± 1.5 kHz (— 6 dB), ± 4 kHz (— 50 dB)
AM ± 3 kHz (— 6 dB), ± 7 kHz (— 50 dB)

- **Stability:**
Less than ± 500 Hz drift for any 30 minute period after warm-up.
- **Antenna requirements:**
Random wire for 0.25 — 1.6 MHz 50 ohm unbalanced feed for 1.6 — 29.9 MHz
- **Speaker impedance:**
4 ohms
- **Audio output:**
2 watts
- **Power requirements:**
100/110/117/200/220/234 VAC, 50/60 Hz
- **Power consumption:**
25 VA
- **Size:**
360(W) x 125(H) x 295(D) mm
- **Weight:**
Approx. 7 kg

JAS 7778-55

Our years of handling and specializing in this equipment have enabled us to build up a fund of knowledge and technical experience, backed by a comprehensive range of spare parts and service facilities. We don't just sell a set, our concern extends throughout the life of your equipment.

Contact us for details of other Yaesu equipment plus the accessories required to complete your station.

All equipment from Bail's carries a full 90-day warranty and complete service back-up.

Prices and specifications subject to change without notice.

bail ELECTRONIC SERVICES
FRED BAIL VK3YS
JIM BAIL VK3ABA

60 Shannon St., Box Hill North, Vic., 3129.
Ph. (03) 89 2213

Yaesu Agents in Australia since 1963

Radio amateur equipment from B.E.S. also sold by —

W.A.	Radio Communication Services, H. R. PRIDE, 26 Lockhart St., Como, 6152	Ph. 450 4379
S.A.	WILLIS TRADING CO., 429 Murray Street, Perth 6000	Ph. 21 7609
	FARMERS RADIO PTY. LTD., 20 Stanley St., Plympton 5038	Ph. 293 2155
TAS.	G. T. ELECTRONICS, 131 Westbury Rd., South Launceston 7200	Ph. 44 4713
	PRINS RADIO, 123 Argyle Street, Hobart 7000	Ph. 34 6912
N.S.W.	Aviation Tooling, STEPHEN KUHLE, 104 Robey St., Mascot 2020	Ph. 667 1650
	Amateur & Novice Comm. Supplies, W. E. BRODIE, 23 Dalry Street, Seven Hills 2147	Ph. 624 2691
	DIGITRONICS, 186 Parry St., Newcastle West 2302	Ph. 69 2040
	RIVERCOM, Sid Ward, 9 Copland St., Wagga Wagga 2650	Ph. 21 2125
Q.L.D.	H. C. BARLOW, 92 Charles St., Aitkenvale, Townsville 4814	Ph. 79 8179
	MITCHELL RADIO CO., 59 Albion Rd., Albion 4010	Ph. 57 6830
A.C.T.	QUICKTRONIC, Jim Bland, Shop 11, Altrec Crt., Phillip 2606	Ph. 81 2824
		82 2864

RETURN OF THE SIX METRE BAND TO AMATEURS — PART 2

Eric Jamieson VK5LP

LETTERS AND OPINIONS

Following now are the variety of opinions expressed in writing to me by those amateurs who sent letters, followed by any relevant comments by myself.

The total overall opinion was for the return to the Amateur Service of the whole of the band 50 to 50 MHz. There will be those who say the reduced usage of six metres doesn't warrant so much space. But this situation could have been forced upon operators due to Ch. 0 causing interference to amateurs' receivers, making operations very difficult — quite apart from any TVI the amateurs themselves may cause. As the amateur population grows, and it is growing rapidly through the ranks of the novices in particular, many of whom have come through the ranks from CB. Future usage will no doubt include six metre repeaters in line with overseas operating, where the segment 52 to 54 MHz is largely used for FM operation.

"I would like to see the 50 to 52 MHz segment returned to the Amateur Service, to give us the full 4 MHz. If not possible I would like to see at least 50 to 50.1 MHz reinstated so that we can at least have part of the international band."

Comment: Restricted as this is, it would be better than we are at present, except that during good openings signals can be heard much further up the band, at least to 50.3.

"I would suggest we exchange our 52 to 54 MHz segment for 50 to 52 MHz. We should then be compatible with overseas countries and tie in with a portion of the New Zealand allocation."

Comment: If there is no chance whatever of obtaining the whole 4 MHz then this should surely be well worth pursuing. There will be those "local" operators who will scream because they may need to purchase new crystals to allow them to operate on 51.1 in lieu of 53.1, or 50.525 instead of 52.525. But the Amateur Service already has a VFO, possibly in a transceiver, and either presently capable of operating 50 to 52 MHz or soon will be after the installation of suitable crystals. It might be remembered, too, that even at this stage a proportion of the 6 metre population could easily operate both transmit and receive on 50 to 52 MHz. Declaring 50 to 52 MHz a commercial band or some other notation won't stop the importation of equipment capable of operating there. Remember, the Industrial and Medical Band at 27 MHz didn't stop the importation of a quarter of a million transceivers for use on that band, and they are being used, by the CB brigade. With exotic DX coming on 50 MHz how many are going to hold fire and just listen?

"If I wasn't a believer in the Amateur Code and a law abiding citizen, I would be very tempted to simply go ahead and use 50 MHz as I have full capabilities for operation there, just like other spectrum squatters, and then wait for the matter to be legalised."

Comment: I am quite sure the fact that the average amateur is law abiding and wants to do the right thing that he hasn't gone ahead with gay abandon and used 50 MHz — there are plenty of geographical locations where it could be done with little chance of detection. I certainly don't condone out of band operation, but when one looks at 27 MHz and notes that the restriction on the authorities is that the CB operators work DX with more than 12 watts PEP, it does make one wonder whether the WIA "cap-in-hand" approach in the past has resulted in amateurs having very little negotiating power, which was proved at the time of the 27 MHz takeover. The "Big Brother" is watching, or at least he has often been governing the thinking, and no matter how well intentioned it all may have been the results were costly. No, I don't think the average responsible amateur wants to operate illegally, but I do think he is entitled to a fair go and to some consideration for changes in operating pattern and spectrum usage. At present we compound lobby for 50 to 54 MHz on a non-interference basis, since this already applies on 52 to 54 and 144 MHz."

Comment: As pointed out earlier, all amateur radio operating has to be on a non-interference basis anyway, despite satisfactory equipment. Jim VK5ZMU at Port Pirie, 110 miles from Adelaide, is unable to operate on 144 MHz until most people have gone to bed, because so many people are using 100 foot towers and masthead amplifiers to receive Adelaide stations (well out of service area range, incidentally), make life unbearable for him and the Department is either unable or unwilling to help. Geoff VK3AMK has mentioned at times that low power operation sometimes be undertaken in Melbourne using vertical polarization, but running more than a few watts brings rocks on his roof! There are scores of other operators in similar situations and they have had to live with the problem. However, there are plenty of areas around Australia where operation on 50 MHz could be undertaken with little chance of problems arising.

"Obviously like everybody else active on 6 metres I would like to see the Ch. 0 allocation scrapped and these stations moved to a higher channel, and the full 50 to 54 MHz returned to the Amateur Service. However, our existing usage for much of the year typically extends from 52.0 to 52.1 and 52.55 MHz. I cannot see much chance of P. and T. looking favourably at any request for the extended space."

"Probably the most sensible and practical proposition would be to request an allocation of say 50.000 to 50.500 MHz. This would provide us with common band space with other countries, and also provide more spectrum space than most of us use anyway. I would therefore favour approaching P. and T. for a shared allocation on a non-interference basis in the range of 50.0 to 50.5 MHz."

Comment: I agree, our usage of 6 metres is limited to the lower portions of 52 MHz, apart from the FM net on 52.55 and some operation on local nets, e.g. 52.1 in VK5. The idea of a shared allocation has brought this about, having been copied from the HF operators in that everyone today works the other guy on his frequency. Compare the Ross Hull contest today with operation when everyone was on AM. Then stations were spread fairly thickly right up to 52.500 and often beyond, but then of course didn't have Ch. 0 either! A shared allocation as suggested at 50 MHz may be OK providing we still had some exclusive allocation, i.e. perhaps 52 to 54 plus 50.0 to 50.5. But to have only a 500 kHz segment on a shared basis isn't looking too far into the future, maybe 20 to 30 years from now if we are still living in a capable of living on this earth, we could and a small allocation on six metres very crowded.

"I prefer straight out availability of 50 to 52 MHz. If the allocation was moved from 50 to 54 MHz it may tend to fragment operation on six metres, i.e. Melbourne and Brisbane would be stuck with working above 52 MHz, while other areas would probably congregate around 50 MHz, with the possibility of a significant decline in local activity. Fragmentation would be overcome if Ch. 0 was shifted."

Comment: One would have to surely agree that if the whole 4 MHz is not to be available, then the preference would surely be 50 to 52, if Ch. 0 is shifted to 54 MHz. The question is, is it really if something is added to that already in use. It is difficult for some to make changes however desirable they might be, so there isn't any doubt in my mind that those who operate 53.1 will continue to do so if they are permitted; such is their choice of course and we should respect that too. Melbourne and Sydney would find 50 MHz operation much more difficult if Ch. 0 is still there, so their fragment would probably remain as of today.

"I believe the most achievable objective would be to attempt to gain segments from 50 to 50.5 MHz, on a non-interference basis. Assuming we can get some agreement as to what ought to be aimed for — what do we do next? Our channels

of communication to the P. and T. must be through the WIA (if our approaches are to be recognised), and I suggest Federal Executive be approached personally on this matter, with a view to a deputation to the Department, if unsuccessful, then a personal deputation to the Minister. We do, therefore, need to act in a professional way to try and achieve our objects."

Comment: One would certainly hope that following this article, that at least the WIA VHF/UHF Advisory Committee will be stirred sufficiently to have another look at this matter and try to see if something can be done.

(This article has been referred to the VHF/UHF Advisory Committee and a report is expected soon. —EG.)

"I feel we should endeavour to obtain all of 50 to 54 MHz, but apart from the problems existing with Ch. 0 in certain areas, it would really mean in general most operators would simply move down 2 MHz and do most of their operating on the low end of 50 MHz instead of 52 MHz. Maybe in view of the loss of 27 MHz to CB operators, novice operators might be allocated a part of the six metre band. This would then give all amateurs a common band where full, limited and novice operators could meet, thus creating activity on the band to retain the allocation for the future."

Comment: It's certain the main centre of activity would shift down 2 MHz, and that's why despite the most desirable objective being the full 50 to 54 MHz, it is hard to justify the need, when it is obvious to all, including P. and T., we can get by today with 144 MHz. But the idea of extending the band for use by novice operators would need to have much merit, and I have sufficient faith in the present novice operators that I feel their presence would be accepted by all who currently operate six metres. It would certainly give them a taste of what VHF has to offer, and may well win a considerable number over to full or full call operation in an endeavour to make better use of bands further up the VHF spectrum.

"Contrary to previous predictions this sunspot cycle is supposed to reach a peak smoothed sunspot number of 150 in April 1980, making it the second highest sunspot maximum in recorded history. The greatest occurred in 1958-59. It would be a tragedy if VK and ZL were not permitted the use of the lower 2 MHz of the six metre band. Much could be added to the knowledge of VHF propagation if VK and ZL were permitted to use the part of the 50 MHz band which is useable to other VHF enthusiasts around the world. Let's face it, it is just not practical to try and tune over 2 MHz listening for weak signals, can operate 52.0 to 52.5 if the worst case occurs, but I do hope you guys can get a 50 MHz allocation."

Comment: This letter came from the USA to support our aims, from an operator who worked 50 MHz to VK and ZL (mostly ZLs due to more favourable propagation conditions) in 1958 and 1959. I think the most relevant point from his letter is the statement "it's not practical to try and tune over 2 MHz listening for weak signals."

Of course it isn't. If operators in a certain part of the world are working a number of countries, say on 50.1 MHz or thereabouts, with marginal signals, but making the grade every now and again, it is inconceivable they will look for signals above 52 MHz under such conditions, the loss of gain due to the use of a normal antenna 2 MHz higher than the frequency for which it is cut will not help weak signals, if they are weak on 50 MHz they will certainly be weaker on 52 MHz all things being equal. But if VK stations were sandwiched in amongst stations from other call areas then it is likely contacts will result. There is little doubt VK stations have been deprived of many overseas contacts due to being 2 MHz higher than the majority of the world's 6 metre operators.

"Until the advent of CB, there was little large scale political pressure of the 'lobby the politicians' type. The Radio Branch was God, and although our

relationships may not have been ideal, we at least spoke the same language. The Amateur Service will never have sufficient numbers to really influence politicians. The Citizen Radio Service has this power, and have used it to 'rock the boat'. The P- and T- Department has been a casualty, and its masters are now more aware of its existence and operation."

Comment: How true!

"As a first step is there any reason why amateurs in VK1, VK5, VK6, VK7, VK9 and VK3 should not be allowed unrestricted operation from 50 to 54 MHz, and those in VK2, VK3 and VK4 outside a declared service area of the three main Ch. 0 stations also be given the same unrestricted operation? If any objection is raised to this scheme the obvious answer would then be: If these stations using amateur power levels are likely to cause TVI to Ch. 0, how can there be any justification for more than one station using Ch. 0 anywhere in VK-ZL with the power levels they use!"

Comment: On the face of it there seems no reason why such a plan could not work, and the last sentence the justification. Co-channel interference between Ch. 0 and ZL Ch. 1 is such that ZL viewers are warned of possible deterioration of picture quality due to "interference from overseas TV".

"...would like to see all of 50 to 54 MHz available for the Amateur Service. If this cannot be on an exclusive basis, what is wrong with having the portion 50 to 52 MHz as Secondary Service for the amateurs?"

Comment: Nothing really. Unfortunately we are really only on a secondary basis in our 52 to 54 MHz allocation — non-interference operation is virtually the same thing, so that's no change.

The following amateurs were good enough to write to me, setting out their views, and I thank them for their time and trouble. There were a considerable number of similar opinions expressed which there would have to be on such a subject. A cross section of opinion has been taken. I would like to thank the following for their participation: VK3AMK, VK5KX, VK4ZIT, K6RNO, VK2ATQ, VK3YEZ, VK3ZYV, VK4ZBB, VK7JG, VK6RM, VK4KK, VK6BG, VK4FU, VK5ZBU, VK3NA, VK3AJR, VK3OT, VKAAT, VK3JH and K5ZMS. I hope I have not missed anybody. I note all Australian States are represented.

SUMMARY

The following is a summary of the 6 metre situation. The various points are numbered so if anyone wishes to write further they can refer readily to the relevant points.

1. The most widely viewed opinion was for the use of the whole 6 metre band of 50 to 54 MHz.

Comment: Great to strive for, and should be aimed at, but I see little likelihood of P. and T. agreeing to this in view of FM using up P. and T. channels 3, 4 and 5. We will be told we cannot justify keeping 4 MHz even looking to the distant future. Can we answer that?

2. The next most popular opinion was to have the use of 50 to 52 MHz firstly on a primary basis secondly on a secondary basis, and other variations.

Comment: This would seem to be the fairest approach to be made. It would mean the retention of 2 MHz as at present, but placing the segment in the international section of six metres. There would be compounded problems for those in Ch. 0 areas if they were not shifted elsewhere. 2 MHz would still allow room for various radio, beacons, and repeaters if required, also for RTTY, slow scan TV, FM, etc. THIS IS THE SECTION WE SHOULD AIM FOR.

3. 50.0 to 50.5 MHz also appears acceptable, but may be selfish in the eyes of some, as appearing orientated towards DX working only, and leaving little room for other types of operation, especially during peak band conditions. It would virtually mean no repeaters. Apart from some problems with the fragmentation of the band, a better choice might be the retention of our present 50 to 54 MHz with the addition of the 50.0 to 50.5 segment either as primary or secondary basis depending on what could be worked out. This would then let those who want to work

DX and other countries to be able to do so, would leave present operating practices to be changed or continued according to the operators' wishes, and would probably cause the least disruption.

4. To be allowed the legal ability to VFO down to 50 MHz and invite a station to come up to 52 MHz for a QSO (mentioned in September 1977 AR in the list of options) did not receive much support, which is probably fair enough. Perhaps some do it now? However, it could have been the start of something more worthwhile in the long term.

5. The other suggestion of being allocated operation down as far as 51 MHz aroused no interest apart from one comment that it may be better than we are, allowing more working of ZLs. My opinion is that you won't work many ZLs wherever you operate, the only ones I have heard for years have been working a few VKs above 52 MHz. Six metres in ZL appears to be worse than in this country, hence the cry from Japan "where we are all on our own".

6. There was a lot of criticism of the WIA right throughout the letters, some quite justified, some perhaps not, but the general thrust seems to be that it is difficult to get past the situation that the Federal body is HF orientated. Maybe that's the fault of the VHF fraternity in not doing something about it, perhaps it's easy to criticise, maybe they are the only people who can work at executive level. Several commented on the "cap-in-hand" approach to the Department in the past by the WIA as if unwilling to step on any corns. Perhaps the P. and T. Department would be happier to see a stronger approach, I don't know.

7. The P. and T. Department came in for very little direct criticism, not because I felt anyone was afraid to say so, but because I think it would be generally accepted by a lot of amateurs that the Department does its best with what it is given and has to work with. However, at whatever level the following should be directed, I would trust the comments will at least be read and considered with some care and interest, and acted upon if possible.

- (a) There seems little doubt the P. and T. Department is almost totally unbinding in its attitude towards the need to make changes from time to time. The refusal to make available even a spot frequency around 50.1 MHz for use in the Darwin area, where so much TEP activity has occurred in recent times seems unreasonable. I refer readers to the first page under Terms of Reference.

- (b) (i), which should have been relevant in this case.
- (b) With the rapid growth of the peak of cycle 21 surely there could be some consideration given to making provision in the 50 MHz band for Australian amateurs to be able to share in the world-wide 6 metre contacts. Will it be a repeat of the 1957 situation when the FME Department decided to long that a year or more of peak TEP activity was lost whilst Australian amateurs attempted to operate between their allocation of 56 MHz and the international allocation of 50 MHz? Ultimately we received permission to use 50 MHz with outstanding results.

- (c) If a case has not already been made to shift Ch. 0 due to interference patterns, it can only be hoped that the next two to three years will produce such a wealth of interference that the point will be brought home strongly enough to Ch. 0 proprietors in the first place, and in turn to the frequency allocation authorities, that this non-standard TEP allocation will be shown as a very poor choice and ultimately disappear as a primary service in Australia.

- (d) On the question of exchanging 52 to 54 MHz for 50 to 52 MHz, it can be born in mind that the section 54 to 56 MHz is already used for the fixed and mobile service, and it would seem sensible to group similar services together. This will then leave the 50 MHz area free for experimental services, like the amateurs, who can operate in and around interference from other areas, particularly if that interference represents other amateur stations. To suggest the area

45 to 50 MHz is suitable for defence purposes is ludicrous to say the least, you never know who may be savoring thousands of miles away. And on this defence matter, may I draw your attention to Item 5.4 The Defence Group, on the first page, other overseas administrations don't use those frequencies for defence purposes.

(e) Let there be at least some consideration given to the request of the amateurs, a body of responsible operators, who though not having the opportunity at present of being counted in hundreds of thousands, have been around for a long time, and have many useful contributions to the advancement of radio through the years.

8. Where do we go from here? I'm not quite sure, but I would hope the WIA will at least take up the cudgels as much as possible. There's enough material in this article for a start to be made. Could a conference of interested parties be held in Melbourne one weekend? I would be glad to attend. But whatever is done, let's get cracking and try to do something. We have the Wireless Telegraphy Act in the process of being re-written, we have WARC 79 looming up. Shouldn't the matters contained herein be pressed home at the appropriate level? What is that level? Let's find out!

9. Now you have read this, what about some more letters? Have you anything to add? Would you support a convention or discussion on the matter? PLEASE let me know now, straight away.

The Voice in the Hills.

QSP

SWL LISTENING PERIODS

A series of set listening periods (SLPs) for the short wave listener has been arranged for 1979. They will be of two hours duration and will be held during the first full week-end of every month in 1979. All the six amateur bands will be used (10m-15m) and modes of reception will be Phone and CW alternatively. SWLs are asked to log every station heard in the set two hour period.

The objective of the exercise is to test propagation at a given time and to compare reception reports throughout the world. The SLPs are being published in all the world's DX magazines and news sheets. All logs will be summarised once a month and SWLs wishing to obtain a copy of the summary must send a SAE or one IRC if living outside Great Britain. Logs must show station heard, station being worked/called, time (GMT) and RST. All reports to be sent via the RSGB c/o Mr. D. A. Whitaker, Hilcourt, 57 Green Lane, Harrogate, North Yorkshire HG2 9LN, England, as soon as possible after each SLP. Brief details of each SWL's equipment should be shown plus comments on band conditions during the listening period. Although these SLPs are in no way a contest it is hoped to award a small prize at the year end to the SWL submitting the best selection of SLP entries.

Good luck to you all!

SET LISTENING PERIODS — 1979

Month	Date	Time (GMT)	Band	Mode
January	7	15.00-17.00	21	Phone
February	4	07.00-09.00	1.8	CW
March	3/4	23.00-01.00	3.8/3.5	Phone
April	7	16.00-18.00	28	CW
May	6	07.00-09.00	14	Phone
June	3	05.00-07.00	7	CW
July	7	05.00-07.00	7	Phone
August	4	10.00-12.00	21	CW
September	3	19.00-21.00	28	Phone
October	7	06.00-08.00	3.5	CW
November	3	06.00-08.00	1.8	Phone
December	1	18.00-20.00	14	CW

**HEARD ANY GOOD
"RUMOURS" LATELY?
TELL A.R. ABOUT THEM**

Amateur Radio November 1978 Page 39

KIMBERLEY TRANSCEIVER

A lightweight, modern radio transceiver is made by West Australian company, R.F. Systems Pty. Limited.

The transceiver, known as the Kimberley, is a dash-mounted VHF and UHF model. It is suitable for mobile or base station operation or as a fixed link or repeater.

For protection and an attractive finish, the set is encased in a Comalco aluminium extrusion surround.

The transceivers are also becoming popular overseas. R.F. Systems recently exported sets to Kenya and Malaysia where they are used by the telecommunications department.

The transceiver was designed to withstand difficult conditions. Each radio set is extensively tested before it is marketed. Tests include a heat test to 60°C, vibration and drop tests.

Further information about the Kimberley is available from R.F. Systems Pty. Limited, 98 Guthrie Street, Osborne Park, WA, telephone 445 8322. ■

AWARDS COLUMN

Brian Austin, VK5CA

P.O. Box 7A, Craftera SA, 5152

DARC DX AWARDS

Deutscher Amateur Radio Club
General Rules:

1. DARC's official DX awards Europa Diplom, WAE and EU-DX-D can be obtained by licensed radio amateurs and SWLs all over the world. The specific rules of these awards are given below.
2. All contacts must be made from the same country. Awards for club stations will be issued to the club, not to an individual operator.
3. The DARC-DX awards are based on the "European Countries List".
4. All amateur bands for which the applicant holds a valid licence may be used.

5. A set of application forms for DARC-DX awards is available for a large size SAE plus 3 IRCs at the address below. The use of these official forms is obligatory.

6. QSL cards for all contacts claimed must be submitted with the application. All cards must be presented in their original form. Any altering or forging will result in disqualification.

7. The service charge of 10 IRCs or equivalent per award or 3 IRCs or equivalent per endorsement covers the mailing of the award and the return of cards by registered mail.

All applications go to:

DARC-DX Awards,
Post Office Box 1328
D-895 Kaufbeuren
Germany (FRG).

8. New certificate holders will be published in "CO-DL", the club magazine of DARC.

9. The decisions of the DARC-DX Committee are final.

European Countries List:

CS1, CT1, CT2, DL, DM, EA, EA6, EI, F, FC, G, GC Guer, GC Jer., GD, GI, GM, GM Sheiland, GW, HA, HB9, HB0, HV, I, IS, IT, JW Bear, JW, JX, LA, LX, LZ, M1, OE, OH, OHG, OJ0, OK, ON, OY, OZ., PA, SM, SP, SV, SV Crete, SV Rhodes, SV Athos, TA1, TF, UA1345, UA Franz Joseph Land, UA2, UB5, UC2, UN1, UO5, UP2, UQ2, UR2, YO, YU, ZA, ZB2, 3A, 4U1, 9H1.

EUROPA DIPLOM

1. The ED is awarded for working (SWLs hearing) amateurs in European countries.
2. Applicants must prove a total score of at least 100 points by submitting QSL cards. The score is computed as follows:

(1) Contacts:

The basic idea of the award is to work as many European countries as possible on different bands in different calendar years. There are no restrictions as to modes of operation or specific amateur bands.

(2) Multiplier:

Confirmed contacts of the current and preceding year count 1 point (multiplier 1.0). Older confirmations are devaluated by a quarter point per year (multiplier 0.75, 0.5 or 0.25). QSL cards dating

back more than four calendar years have lost their value for the certificate.

(3) Annual Score:

The sum of all confirmed European countries on different bands in a calendar year multiplied by the respective multiplier produces the annual score.

(4) Total Score:

The total score is the rounded sum of all annual scores.

(5) Example:

Date of application — June 17, 1972.

	1972	1971	1970	1969	1968	1967
(1) confirmed QSOs	8	48	36	41	21	7
(2) multiplier score	1.0	1.0	0.75	0.5	0.25	0.0
(3) annual score	8	48	27	20.5	5.25	0
(4) total score	8	48	27	20.5	5.25	—109

3. Europa Diplom Honor Roll:

(1) Each certificate holder with an actual score of at least 100 points will be listed in the ED Honor Roll. The ED-HR arranged according to the scores will be published in DARC's "CO-DL" twice a year. Members of the Honor Roll are awarded an additional sticker.

(2) To improve the score suitable QSL cards may be turned in twice a year. Make sure that the award manager receives them before the end of June or December to be considered in the subsequent publication.

(Rules for the "Worked All Europe" and "EU-DX-D" will be published at a later date.) ■

QSP

THOUGHT FOR THE MONTH

"Those who persistently trigger repeaters without saying anything perhaps would rather have people wonder why they don't say anything rather than come out with a comment and then leave people wonder why they bothered to say anything." — Break-in. ■

An invitation to join the TEN-TEC "Argonaut Club"

TEN-TEC Argonaut 509

Tired of push-button QSOs? Had it with the KW killers? The almost too easy life of power hamming? Then the excitement of Argonauting is for you. The QRPP world is different. A challenge? Of course. The test of an operator? Perhaps. But above all it is the thrill of working the world with 5 watts.

The Argonaut club is exclusive, not everyone is a member. But if you enjoy the spirit of conquering distance with lower power, you are "in." There are no dues — just the price of an Argonaut.

Join the thousands of fellow members in the Argonaut club, get in on the Argo fun. Your membership awaits you at your Ten-Tec dealer.

SPECIFICATIONS:

Five band: 3.5-30 MHz. SSB and CW modes. 1/2µV receiver sensitivity. 5 watts transmitter final input. Fully solid-state. Permeability tuning. Instant break-in. Instant band change without tune-up. Receiver offset tuning. Automatic sideband selection, reversible. Direct frequency readout. Built-in SWR bridge. S-Meter. WWV receive. Internal speaker. Plug-in circuit boards. 12-14 VDC or AC supply power. Wt. 6 lbs. Size HWID: 4 1/2" x 13" x 7".



509 ARGONAUT TRANSCEIVER	\$419.00
215-P CERAMIC MICROPHONE	\$ 45.00
A.&R. PS-353 P. SUPPLY	\$ 38.00


Of Course . . . You can add the Matching Lineat Amplifier in the Future. Please Phone, Write or Call, for Further Particulars of the Range.

graham e. stallard

27 WHITE AVE. LOCKLEYS 5032
SOUTH AUSTRALIA — PHONE 43 7981

Authorized Australian
Distributor for

TEN-TEC

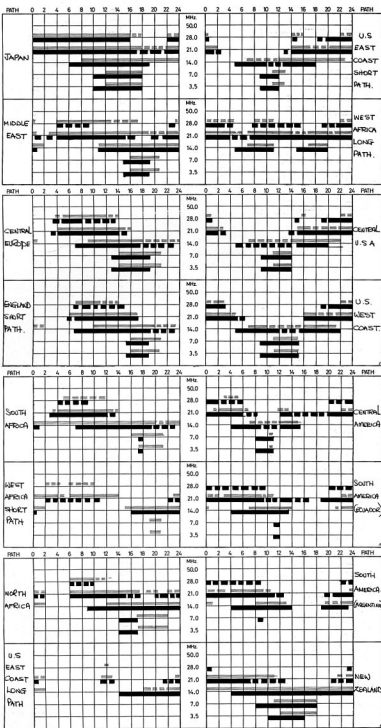

LEGEND

■ FROM WESTERN AUSTRALIA.
 ■ FROM EASTERN AUSTRALIA.
 ■ BETTER THAN 50% OF THE MONTH, BUT NOT EVERYDAY.
 ■ LESS THAN 50% OF THE MONTH.
 ■ ALL TIMES UNIVERSAL UTC (GMT).
 PREDICTIONS COURTESY I.P.S. SYDNEY.

Propagation during the winter months has been quite mixed and now having moved into spring conditions the longer skip distances are quite pronounced. Solar activity is still very much up and down very closely coupled to the sun's rotational period (approx 26 days). There has been considerable storm activity and a great many flares with resultant fade outs right through the spectrum. One particular storm on August 27th produced a fine auroral display on August 28th.

The movement of the K-indices produced quite some interesting figures from the classic quiet period and enhancement effect prior to the storm. It commenced at 0246 UTC on August 27th and the K indices from Mundaring in Western Australia and Toolang in Victoria tell an interesting story. For the eight 3-hour periods were as follows:

	Time (UTC)									
	00-03	03-06	06-09	09-12	12-15	15-18	18-21	21-24		
Aug.										
25	1	0	2	3	2	2	2	2		
26	1	1	2	3	2	2	2	1		
27	1	1	1	1	1	1	1	2		
28	3	3	3	4	5	4	4	3		
29	3	3	3	4	4	4	4	3		
30	3	5	7	7	8	5	3	2		
31	6	5	7	5	6	3	3	3		
32	4	4	6	5	6	3	2	2		
33	3	4	3	4	5	4	6	4		
34	2	3	4	4	4	4	5	4		
35	4	3	4	4	3	3	2	4		
36	3	3	4	4	5	4	4	2		

Figures shown opposite date — Mundaring — bold figures in second line — Toolang.

Storm finish time was 1600 UTC, August 31.

From reports the auroral effect was felt from quite low frequencies up to VHF.

Some issues back I mentioned the Ohi/Sargent method for predicting the forward smoothed sun spot number from the geomagnetic activity recorded in the downward position of the previous cycle. One of the notable research centres for geomagnetic activity tested the method against data from the previous cycle. They found the method fitted quite nicely into place and calculated that the next peak came up with a smoothed figure of 235, which if it eventuates, will be an all time high.

Researchers around the world are keeping a close eye on all these figures and they generally agree the method shows promise. Should the method prove itself, then the whole field of solar studies will need revision, particularly with respect to forward predictions. It could give a 48 month period of relatively firm data, whereas at this time little effort is given to casting more than 6 month forward predictions.

Solar activity is in somewhat of a lull at the time of writing with just short bursts of activity to liven things up. Though the overall levels are rising ever so slowly.

Provisional sunspot data from Zurich for June, July, August are 94.1, 68.4 56.7 monthly mean. In June daily counts above 100 were 14 days highest 158 on 22 and 23. July daily counts above 100 were 8 days highest 127 on 11. August just made the 100 on one day, 31.

Smoothed running numbers 12-77 — 55.4, 1-78 — 58.6 (Ohi Sargent Prediction 59.6), 2-78 — 62.7. Zurich predictions for 11-78 — 102, 12-78 — 108, 1-79 — 114, 2-79 — 120.

2800 MHz solar flux figures for 5-78 — 147.3, 6-78 — 143.1, 7-78 — 131.7, 8-78 — 114.7 follow very closely the month mean sunspot numbers predicted figures were 5-78 — 149, 6-78 — 151, 7-78 — 150, 8-78 — 148. As always — unpredictable!

As you probably have noticed, we have added some extra paths to the usual list of the past few years. We hope that they will assist users. The parameters used for predictions are taken as when perfect conditions apply over those paths. However, the range of variations likely to occur can be considerable. Within these bars are periods of much larger reflections. Usually those without beam antennas cannot always take advantage of this mode — sometimes the reverse occurs. Your take-off angle will largely govern your propagation during these periods. I am looking at the possibility of refining the charts to greater detail, but think perhaps that East and West take-off could complicate the matter. I will try perhaps for one month to try from Eastern Australia to evaluate results.

VIC. WESTERN ZONE CONVENTION

at

BALLARAT

NOVEMBER 4th and 5th

Further details and bookings
for Dinner to
VK3ZBS or VK3ZHH

CONTESTS

Wally Watkins VK2ZNN/NCU
Box 1055, Orange 2800

CONTEST CALENDAR

November:

4/5 RSGB 7 MHz (CW)
4/5 ARRL CW SWEEPSTAKES
18/19 ARRL PHONE SWEEPSTAKES
23/26 CQ WORLD WIDE DX (CW)

December:

2/3 ARRL 160 METRE CONTEST
9/10 ARRL 10 METRE CONTEST
16/ ARRL 10 METRE CONTEST
JAN 7 ROSS HULL VHF/UHF MEMORIAL CONTEST.

ROSS HULL VHF/UHF MEMORIAL CONTEST RULES 1978-79

DATE:

0001 GMT 16-12-78 to 2400 GMT 7-1-79.

The Wireless Institute of Australia invites Amateurs and SWLs to join in this annual contest which is held to perpetuate the memory of Ross Hull, who did so much to further VHF/UHF.

A Perpetual Trophy is awarded annually for competition between members of the WIA, and is inscribed with some details of the man the contest honours. The name of the winning member of the WIA for each year is inscribed upon the trophy and that member also receives a suitably inscribed certificate.

OBJECTS

Amateurs from Australia and Territories will endeavour to contact as many other Amateurs as possible under the following conditions.

DATE OF CONTEST

10th December 1977, 0001 GMT to 8th January 1978 2400 GMT.

DURATION

Any seven calendar days within the dates mentioned above which need not be consecutive. These periods are at the operator's convenience. A calendar day is from 0001 GMT to 2400 GMT.

RULES

1. There are two divisions, one of 48 hours duration, and the other of 7 days duration. In the 7 day division there are four sections.

- Transmitting Open
- Transmitting Phone
- Transmitting CW
- Receiving Open

An open log is one where points are claimed for most on one mode, i.e. Phone, CW, RTTY, ATV, SSTV, [AM, FM and SSB are grouped together as phone.]

In the 48 hour division, the best score over any consecutive 48 hour period is the winner.

In the 7 day division, the best score over any seven days (not necessarily consecutive) is the winner.

2. Any Amateur operating fixed, mobile or portable within the terms of his licence may participate.

3. All Amateur VHF/UHF bands may be used, but crossband contacts are not acceptable. At any one time, single frequency operating only is permitted. Cross mode contacts are permitted.

4. Amateurs may enter for any one of the sections and either or both divisions. 7 day certificate winners are not eligible for 48 hour awards.

5. Two contacts per band per day, irrespective of mode are permitted provided that at least two hours elapse from the previous contact with that station on that band.

6. Logs from a multi operator station are not acceptable. One operator only may operate a station at any one time, and must submit a log for his own operation.

7. Entrants must operate within the terms of their licences.

8. The exchange of RS or RST reports with a serial number starting at 001 and advancing by 1 for each successive contact will be proof of contact.

9. Entries should be set out on Quarto sheets, using one side of the paper only, and must be forwarded to reach the Federal Contest Manager, Wireless Institute of Australia, Box 67, East Melbourne, 3002, in time for the last opening of logs on Friday, February 17th. Envelopes should be clearly marked Ross Hull Contest. Early logs will be appreciated.

10. Scoring will be based on the following table:

Freq.	Less than 200 kHz	More than 200 kHz within Call Area	More than 200 kHz other Call Areas
52	2	5	10
144	2	5	10
432	5	15	25
576	10	25	50
1296 and 20	50	100	100

Bonus points: Each new call area contacted, 20 points, once only per band per day (including own call area).

Operation via active repeaters or translators not permitted for scoring purposes.

11. Logs should be set out as in the example and must carry a front sheet showing the following information:

Name
Address
Section
Call sign
Claimed 7 day score
Operating days
Operating dates
Highest 48 hours score
Operating period

Declaration — I hereby certify that I have operated in accordance with the rules and spirit of the contest.

Comments

12. All times to be logged in GMT only.

13. Awards: Certificates will be awarded to the highest scorers in each section, in each call area. Additional certificates will be issued to contestants who break any VHF/UHF record during the contest.

The VK contestant who returns the highest score in the transmitting section, and who is a member of the WIA will have his name inscribed on the trophy which will be held by his Division for the prescribed period.

Certificates will be awarded to the highest 48 hours entrants in the transmitting section, who have not won a 7 day certificate.

RECEIVING SECTION

1. SWLs may only enter for this section.

2. Contest times and logging of stations will be the same as the transmitting section except that there will not be a 48 hours section.

3. Logs must show the call sign of the calling station, the serial number given, and only the call sign of the other station. Scoring will be as for transmitting stations.

4. Any scoring contacts may be logged. There is no limit to the number of times that a station may be logged provided that serial numbers are given.

5. The logs for any 7 days may be submitted and the winner of the section will be highest scorer.

6. Certificates will be awarded to the highest scorer in the contest, and if sufficient interest is shown, to state winners.

GENERAL

It is preferable that complete logs be submitted as an aid to checking, but contestants must clearly show the best 7 days or 48 hours.

Enjoy yourself in another friendly contest, and remember — it is only as friendly as you make it.

EXAMPLE OF A VK3 TRANSMITTING LOG

Date/Time GMT Dec. 18	Band MHz	Emission	Call sign	RST sent	RST rec.	Points	Bonus
0156	52	SSB	VK4DT	59001	58037	10	20
0207	52	CW	VK4XA	56902	57902	10	—
0212	144	SSB	VK7ZAH	58003	58036	10	20
0216	432	SSB	VK3ZBB	59004	59042	5	20
0320	1296	SSB	VK3ATN	53005	52023	50	20

IARU NEWS

RECIPROCITY OF LICENCES

Much detail was published on page 25 of AR Jan. 1978 on the subject of reciprocity licensing.

An up-date of that might be useful.

For intending residents of Australia, the list of countries with which the Australian Administration has reciprocal arrangements remains unchanged to see AR for August, 1972.

There is also no change concerning "guest licensing" — i.e. licences to temporary visitors to Australia. Guest licensing, according to one informant, has now become more extensive irrespective of whether or not a reciprocal agreement exists. Apparently visiting amateurs can obtain amateur licences not only in Australia, but also in Botswana, Belgium, Brazil, France, West Germany, Israel, Luxembourg, Morocco, Portugal (maximum 30 days), Rhodesia, Swaziland and Sweden. Some of these countries require proof of 12 w.p.m. Morse qualification and have no "no-morse" licence grades.

It would appear as if you cannot obtain a U.K. reciprocal licence unless you can produce a current licence, and your passport to show that you are a national of the country where your licence is current.

According to another source, applications for a U.S.A. amateur licence by aliens of the U.S.A. must be made to the FCC Gettysburg PA 17325 instead of to Washington.

The U.S.A. now has reciprocal agreements with 50 countries. Add Liberia and Greece to the list. The FCC form to use is 610-A.

FRANCE

From "Mobile News" of July 1978 comes the news that a reciprocal licence for G stations in France, which was free, now costs francs 117.50. This is calculated as 250 times the cost of a local telephone call and is for one year.

WARC 79

Radio Communication of July 1978 sets out brief details of the UK preparatory draft for WARC 79 as affecting the amateur service in that country. One or two extracts might be found interesting as pointers towards the enormous problems of frequency allocations.

In relation to the band 4 to 30 MHz "radio amateurs have asked for an extension to one of their existing bands and an addition of several fairly wide new bands". The comments were — "It should be mentioned that should the proposed reductions in fixed service requirements not be realized at the 1979 WARC the extra provision proposed for other services may not be realized in full. This will depend partly on the reaction of those developing countries whose use of the HF bands for fixed services is still vital, particularly in the bands below about 10 MHz".

Relating to 30-108 MHz it states — "In Region 1 there is no internationally allocated amateur service band in this part of the frequency spectrum. The 70 MHz allocation in the U.K. is the subject of national, not international, regulations". "Radio amateurs (and ISM) interests have also asked for extra provisions in the existing television Band 1. Until the future of Band 1 is clearer it is not possible to say whether these needs can be satisfied".

SIDEBAND ELECTRONICS IMPORTS

P.O. BOX 23, SPRINGWOOD, N.S.W. 2777
 WAREHOUSE 78 CHAPMAN PDE., FAULCONBRIDGE
 TELEPHONE (047) 51-1394 A.H. (047) 54-1392

Many models of our HY-GAIN antennas are moving so fast that even with our large stock of them, some may all be sold soon. However, a second large supply is due early December, in time for those possible Christmas presents!

Our own Xerox machine is still able to make copies of manuals at cost.

HY-GAIN ANTENNAS:

18-AV7/WD 10-60M vertical 23' tall	\$125
TH6-DXK 10-15-20M senior 6 el. Yagi 12' boom	\$300
TH3-MK3 10-15-20M senior 3 el. Yagi 14' boom	\$240
TH3-JR 10-15-20M junior 3 el. Yagi 12' boom	\$175
204-BA 20M 4 el. Tiger array 26' boom	\$230
HY-QUAD 10-15-20M fill size Cubical Quad	\$260
2M 8 el. Yagi with balun 12' boom	\$30
2M 5 el. Yagi (due December)	\$25
2M 14 el. Yagi (due December)	\$40
BN-86 balun for HY-GAIN beam buyers only	\$20
BU-5 Japanese balun suitable for 10M beams	\$14

ANTENNAS SUITABLE FOR 10M:

11M 5 el. Yagi 17' boom	\$70
11M G.P. with 3 radials	\$20
11M 5/8 vertical with 3 radials (CLR-2) 19'10"	\$40
11M 5/8 vertical with 4 radials (CLR) 22'3/4"	\$50

ACCESSORIES & COAX CONNECTORS:

SWR-50A Twin meter 3.5-150MHz 1KW SWR/Pwr meter	\$22
Bumper Mount with 1/4" 24 thread antenna mount	\$7
Gutter mount with 1/4" 24 thread antenna mount	\$4.50
3M length RG-58U with PL-259 one end	\$3
M-ring body mount	\$3
12V regulated supply	\$26
GLP right angle RG-58U to SO-239 w/lock nut and weatherproof cap	\$3.50
MLS right angle RG-58U to PL-259	90c
PL-259 standard & solderless, RG-8U & RG-58U	75c
In-line splice RG-8U & RG-58U	75c
SO-239 chassis connector with 2 hole mounting	75c
Right angles & T-connectors	\$1.50
Double male connectors	85c
Mic. sockets, chassis & in-line, 3 & 4 pin	85c
3 circuit mic. jacks	85c
Crystals for QWARTZ-16 2M transceiver:	
Channel 51 TIR 146.55 — pair	\$5
Channel 64 TIR 146.20 — pair	\$5
No. 14 hard drawn copper wire — per meter	10c
1/4" H.D. foam coax extra low loss — per foot	\$1
Type RG-6U foam coax — per yard	80c
Type RG-58U coax — per yard	30c
8 core rotator cable — per yard	65c
KEN KR-400 rotator with 28V AC control box	\$125
CDR HAM III rotator with 28V AC control box	\$175

SUNDRIES:

FRG-7 5-30MHz General coverage receiver	\$350
ICOM IC-202 2M SSB portable transceiver	\$175

KENWOOD PRODUCTS:

TS-520S 10-160M SSB/CW transceiver 240V AC	\$700
TS-820S 10-160M SSB/CW w/digital readout	\$1100
TS-700SP 2M all-mode transceiver	\$800
TR-7400A 2M transceiver	\$475
TR-7500 2M transceiver	\$275
DG-5 Digital display for TS-520S	\$200
TV-506 6M transverter	\$225
TV-502 2M transverter	\$250
AS-200 antenna matchbox	\$175
DS-1A DC-DC converter	\$70
DK-520 adaptor for DG-5 to TS-520 use	\$20
LF-30A low pass anti-TVI filter	\$30
VFO-820 external VFO for TS-820S	\$175
VFO-520S external VFO for TS-520S	\$150
SP-620 external speaker for TS-820S	\$60
SP-520 external speaker for TS-520S	\$30
YG-89C CW filter for TS-820S	\$55
YG-3395C CW filter for TS-520S	\$50
MC-10 hand-held microphone	\$20
MC-50 desk microphone	\$45
HC-2 Ham clock	\$25
SM-220 Station monitor	\$300
BS-5 (TS-520S) & BS-6 (TS-820S) pan adaptors for SM-220	\$55
TS-120V 12V DC mobile transceiver with NB, VOX, IF Shift and digital readout 30W PEP (expected delivery December)	\$600

NOVICE SPECIALS: Still available at these low prices

Transceivers for 10M coverage, AM/USB, 15W PEP	
(a) SIDEBAND SE-502 240V AC/12V DC w/inbuilt SWR/RIF meter 28.300-28.600 MHz	\$150
(b) UNIVERSE 224M 12V DC 24 ch. 28.480-28.595 in 5 KHz steps Clarifier operates on both transmit and receive	\$125
Sets of Crystals for Amateur licence holders for converting 23 ch. 27MHz CB units to 28MHz, suitable SIDEBAND, UNIVERSE, KRACO, HY-GAIN etc. SSB/AM units:	
Set of 4 crystals converts to 28.300-28.600 (limited quantity)	\$15
Set of 8 crystals converts to 28.480-28.595	\$40

ONE OF EACH ONLY:

Yasu Musen FT-3015 160-10M HF all mode 12V DC 30W	\$700
ICOM IC-710 — IC-701 with RM-1 programmer	\$1200
USED SIGNAL ONE CX7A, perfect condition, 400W PEP 160-10M, N.B. & auto-keyer	\$1000
FDK MULTI 800D 2M mobile transceiver 800 ch.	\$375

All prices quoted are net, ex Springwood NSW, cash with order, subject to change without prior notice. All risk insurance is free: freight by air, road, rail or post at cost. All orders cleared on a 24 hour basis after receipt with payment.

Arie Bles (VK2AVA) Proprietor

Roy Lopez (VK2BRL) Manager

CUSTOM COMMUNICATIONS HAM RADIO & AMATEUR GEAR

TEL. 681 3544
A/H 674 1719



\$685.00

**NEW
350B
AND
350D**

WE TRADE IN AND
AUCTION EQUIPMENT

COME TO SWAN FIRST!!!
FOR YEARS SWAN HAS CONSISTENTLY PRODUCED THE
FINEST HAM EQUIPMENT FOR YOUR TRANSMITTING AND
LISTENING PLEASURE. TO ACCOMPLISH THIS, WE HAVE
COUPLED VALUE ENGINEERING WITH CUSTOMER
SERVICE. VALUE ENGINEERING HAS SAVED YOU MONEY
BY ELIMINATING UNNECESSARY COMPONENTS WITHOUT
EFFECTING PERFORMANCE. OUR CUSTOMER SERVICE
POLICY KEEP YOU ON AIR BY LETTING US HELP TO SOLVE
YOUR PROBLEMS WHETHER IT'S THE 700S, 350B OR
350D. YOU CAN DEPEND ON THESE CHAMPIONS FOR
TROUBLE-FREE PERFORMANCE — EVERYTIME!!!!

FULL 300 PEP INPUT ON SINGLE SIDEBAND
SELECTABLE 80 OR 100HZ CW AUDIO FILTER.
BUILT IN AC POWER SUPPLY. BUILT IN 25 KHZ
CRYSTAL CALIBRATOR FOR MODEL 350B.



444 DESK MICRO-
PHONE \$77.00



**PEAK READING SWR
WATTMETER**

WM200A \$140




\$1150.00

MARK II 2000 WATT LINEAR AMPLIFIER
PROVIDES FULL POWERFUL SIGNAL WITH 100 WATTS OF POWER.
EVERYTHING IS INCLUDED. AN ATTRACTIVE RF DECK, SEPARATE
MATCHING POWER SUPPLY AND A 4.5 FT. OF CONNECTING CABLE.



ST-2 ANTENNA TUNER \$355

A QUALITY ENGINEERED
PRODUCT BUILT FOR RELI-
ABILITY AT A REASONABLE PRICE



DD-76 \$285.00

PRESENTS DIGITAL DISPLAY OF
FREQUENCY IN BOTH
TRANSMIT AND RECEIVE
RESOLUTION TO 1KHZ BUILT-IN
240V POWER SUPPLY.

MODEL 350D HAS THE SAME
SPECIFICATIONS AND
CHARACTERISTICS AS THE
350B EXCEPT THE UNIT COMES
WITH A BUILT-IN DIGITAL
FREQUENCY DISPLAY WITH
READOUT TO 100KHZ.



**WE SELL
KENWOOD
YAESU
DRAKE
ICOM
SWAN**

Sydney distributor for ICOM
Australian agent for SWAN

**HAM
RADIO
SPECIALISTS**

HF—VHF EQUIPMENT

RITTY UNITS

S.S.T.V.

NOVICE EQUIPMENT

ROTATORS

CB RADIO &
ACCESSORIES

WORKSHOP

•TEST EQUIPMENT
•Do it yourself workshop

PRODUCT TRAINING
& ADVICE

RITTY

MODEL 15 PAGE PRINTER
TAPE SENDERS, TAPE
RE-PERFORMERS CUST.
COM. DT-600
DE-MODULATORS BUILT UP
OR IN KIT FORM

SPECIAL FEATURE
FREQUENT HAM AUCTIONS
PRODUCT NIGHTS
FULLY EQUIPPED
"DO IT YOURSELF"
WORKSHOP

LEVEL METERS,
OSCILLATORS, V.T.V.M.,
MORSE KEY, ELECTRONIC
KEYERS, MATCHING
NETWORKS, HF AND VHF
ANTENNAES

MAIL ORDER SERVICE
COUNTRY ENQUIRIES
WELCOME
ALL LETTERS ANSWERED

* ROTATORS * ANTENNAS * METERS
CUSTOM COMMUNICATIONS
6 ORCHARDLEIGH ST., YENNORA, N.S.W.

681-3544

AFTER HOURS
674 1719



**TRADE ENQUIRIES WELCOME
WE ARE SEEKING LOCAL AND
INTERSTATE DISTRIBUTORS.**

**OPEN
6 DAYS**

*BUY FROM THE SPECIALISTS
*EASY TERMS, FINANCE AVAILABLE, BANKCARD
WELCOME.

CUSTOM COMMUNICATIONS

CNR. LARRA & ORCHARDLEIGH ST.
YENNORA (Near Guildford) N.S.W. 2161

TEL. 681 3544
A/H 674 1719



NAGARA ANTENNAS:
5556 5 m 5el Beam Antenna 122.00
V4jr Tray Vertical 40-10m, 5.2m High. 99.00
No guys required
V5jr Tray Vertical 80-10m, 6.2m High. 139.00
No guys required

RAK ANTENNAS:
RAK Midv VN 80-10m Trap Horizontal Dipole 105.00
RAK Midv AL48DXN 40-40m Trap Horizontal Dipole 62.00
RAK Midv AL24DXN 20-40m Trap Horizontal Dipole 60.00

HUSTLER MOBILE ANTENNAS:
BM-1 Deluxe Universal Bumper Mount (incl. Ball Socket) 25.00
MO-2 Fold-over Mast (reqd. for all resonators) 29.00
RM20, RM15, RM16, 20m, 15m, 10. Resonators 20.00
RM40 80m Resonator 22.00
RMB0 80m Resonator 24.00
RSS-2 Medium Duty Spring 12.00

DISCONE ANTENNA:
GDX-1 80-480MHz Commercial Discone 79.00

RINGO ANTENNA:
ARX-2 Ringo Ranger Gain Omni-Directional for 2 m. 49.00

JAYBEAM ANTENNAS:
88/70cm 88el, 70cm, 14.5dBd Gain 99.00
16/70cm 16el, 70cm, 15.7dBd Gain 76.00
PBM18/70cm, 18el, 70cm, 14.9dBd Gain 69.00
18/70cm, twin 8el, 70cm, 59.00
12.5dBd Gain
10X1/2M 2m Crossed Yagi, 10el, 11.3dBd Gain in each plan 89.00
8V/2M 8el Beam, 5.5dBd Gain 45.00
10V/2M 10el, 2m Beam, 11.4dBd Gain 77.00
PMH/2C Phasing Harness 17.00

HY-GAIN ELECTRONICS:
HY-QUAD 16/15/20m, 2 elements 349.00
204Ba 4el Monobander for 20m 279.00
205Ba 3el Monobander for 20m 210.00
14AVQ/WB 40-10m Trap Vertical 109.00
18AVT/WB 80-10m Trap Vertical 155.00
TH3MK3 16/15/20m 3 el Beam 299.00
TH3J 10/15/20m 3el Beam 229.00
TH6DXX 6el Tribander Beam 399.00
LONG 3el Wide-spaced 27. MHz Beam 180.00

MISC. ANTENNAS & ACCESSORIES:
LINDENOW 5/8ths 2m Mobile, Heavy Fibreglass 35.00
BELLING-LEE Base for above 4.00
KLAMC Magnetic Bases 19.00
AS-KDA Spring Mount (Base) 20.50

COAXIAL CABLE (MIL SPEC):
RG58AU 1,000 ft. Reels 50c/m
RG58AU 500 ft. Reels 50c/m

BALUNS:
AS-BL For Beams 31.00
BL50A 50 ohm 4Kw for Dipoles 25.00
BL70A 70 ohm 4Kw for Dipoles 25.00

ANTENNA COUPLERS:
CNW-217 Incl. swr/pwr Direct Reading. 200w pep max 179.00
CNW-417 Incl. swr/pwr Direct Reading. 500w pep max 219.00

ANTENNA CHANGE-OVER RELAYS (DAIWA):
CX-2L 1.8 thru 170MHz, 100w pep max 45.00
CX-2H 1.8 thru 450MHz, 200w pep max 59.00

COAXIAL SWITCHES (DAIWA):
CS201 2 Position, high pwr. up to 500MHz, Commercial Qual. 24.00
CS401 4 Position, high pwr. up to 500MHz, Commercial Qual. 49.00

SWR/PWR METERS:
VC2 Twin Meters, 5-150MHz with Calibration Chart 54.00

OSKERBLOK SWR200, 5-200 MHz, 2/20/200/2000w
SW410A UHF 140-500MHz Direct Reading 75.00
SW210A 1.8 thru 150MHz 20/120w Direct Reading, Professional 85.00
SWX777 Professional 1.8 thru 30MHz Direct Reading 151.00

SYDNEY AGENTS FOR

MODEL	DESCRIPTION	PRICE
IC701	HF Solid-State 160-10 m Transceiver	1,580.00
IC701PS	Matching Power Supply/ Speaker for above	245.00
IC202E	2 m SSB Portable, 3 watts	219.00
IC202	6 m SSB Portable 3 watts	219.00
IC225	2 m fm Synthesised Transceiver	299.00
IC211	2m All-Mode Transceiver, AC/DC	785.00
IC245	2 m fm Digital Mobile Transceiver -SSB Attachment for above	465.00
IC402	70 cm SSB Portable Transceiver	142.00
RM2/3	Remote Controller for IC701/211/245	169.00
	Critals for IC215/22 Series (Pair)	10.00
	Critals for Oscar (IC202E) (Each)	7.50
BC20	Nicad Pack & Charger for Portables	59.00
ICSM2	Condenser—Electric Desk Microphone for ICOM Rigs	96.00
	Brackets for IC225 Series	17.50
	Brackets for Portables	18.90



IC211

RTTY EQUIPMENT
WE CARRY RECONDITIONED PAGE PRINTERS, TAPE PERFORMERS, TAPE DISTRIBUTORS, DEMODULATORS, LOOP SUPPLIES, ETC.

15	Page Printer 110V	150.00
14	Tape Repetitor 110V	150.00
14	Tape Distributors 2 Heads 110V	150.00
DT-600	Demodulator fully build up 170Hz-850Hz	270.00
DT-600	Demodulator Kit	150.00
AFSK	Inclusive 12V Power Supply, Meter, all Plug & Connections	60.00
	Oscillator, Fully built up	40.00
	Kit includes 6V Power Supply X-Tal for 170 and 850 Hz	40.00
OM-7M	SLOW SCAN T.V. Ham Vision Monitor	1400.00
OM-7C	4 inch Monitor Screen Ham-Vision Camera	
FD50M	LOW PASS FILTERS (DAIWA):	
FD50LS	32MHz Fe, 1Kw, 5 mag, good qual.	35.00
	32MHz Fe, 1Kw, 5 mag, good qual.	35.00
TE7-01	OMEGA NOISE BRIDGE: Up to 100MHz	44.00
	POLAMAR PRODUCTS:	
	IC Keyer	149.00
	VLF Converter	89.00
	Receives Noise Bridge	79.00
	QM70 PRODUCTS:	
	432/144MHz Converters	59.00
	432/28MHz Converters	59.00
	144/28MHz Converters	59.00
	1296/28MHz Converters	79.00
	28/14 "SCORPION" high power Transceiver	225.00
	2m Linear amp 70w max pep	129.00
	2m/432MHz Transmitters	125.00
RF440	COMPRESSORS & PROCESSORS (DAIWA):	
RF550	Speech Processor, phasing type, 6dB Gain	125.00
	Speech Processor, Crystal Filter Type, 6dB Gain	165.00
HK702	MORSE KEYS (HI-MOUNTD):	
HK708	Delux Key with Marble Base	58.00
HK706	Economy Key	21.00
HK706	Operator's Key	25.00
MK701	Manipulator (Slide-swiper)	45.00
EK105Z	Electronic Keyer	165.00
VM-1	MICROPHONES:	
VM-2	Noise-cancelling, Dynamic, Low Z	9.50
	Desk Mike with Pre-amp, Dynamic, Low Z	29.80

TWO GREAT STATE-OF-THE-ART RIGS

1.



IC-211 2m All-mode

SMALL ENOUGH FOR MOBILE!



Maximising 4MHz — the full 2 metre band — with fully synthesised multi-mode operations, the IC211 is the most advanced, highest quality 2 metre transceiver available anywhere. The IC211 comes complete with ICOM's single-knob frequency selection and two digital VFO functions, standard features at no extra cost.

The large weighted flywheel knob mounted with low friction ball bearings is used to drive an optical chopper to provide pulses to the synthesiser LSI, which shows a full 7 digit readout. A breaking mechanism, which operates electrically, engages to provide a smooth feel at slow speeds; and a "dial lock" button holds the reading at the time it is pushed, even though the knob continues to rotate.

The IC211 incorporates computer compatible interface via the 24 pin accessory socket on the rear panel which enables PIA connection for the microprocessor buff.

The IC211's synthesiser steps are displayed, with positively no time lag, backlash or uncertainty in display stability, in increments of 100 Hz or 5 KHz from 144–146 MHz, and in 5 KHz from 146–148 MHz for FM operation. Any offset from 10 KHz through 4 MHz for repeater use can be programmed.

The IC211 contains both 240vac and the 13.6vdc power supplies and has a built-in high SWR autopower control. Variable output power contributes to the IC211's versatility. Output between 500 milliwatts and 10 watts may be front panel controlled on FM.

More of the maximiser's built-in standard features include: a pulse type IF noise blanker; front panel discriminator meter, SWR meter; VOX with adjustable VOX gain delay and antivoice; CW monitor volume level; and semibreak-in CW operation.

And your new IC211 carries the VICOM 90 day warranty backed by spare parts and technical expertise.

COMPARE THE IC211 WITH THE OTHERS!

Price \$785

2.



IC-701 HF

ICOM's superior LSI technology takes the lead in Amateur HF. The extremely compact IC-701 delivers 100 watts output from a completely solid state, no tune (broad band design) final, on all modes and all bands, from 160–10 M. With single knob frequency selection and built-in dual VFO's, the LSI controlled IC-701 is the choice in computer compatible, multi-mode Amateur HF transceivers.

The IC-701's single frequency control knob puts fully synthesized instant tuning at a single finger tip. WIDE bandwidth, with 100 Hz per division and 5 KHz per turn, is instantly co-ordinated between the smooth turning knob and the synthesizer's digital read-out with positively no time lag or backlash (no waiting for counter to update: less operator fatigue). And at the push of the electronic high speed tuning button, the synthesizer flies through megacycles at 10 KHz per step (500 KHz per turn).

The computer compatible IC-701 LSI chip provides input of incremental step or digit-by-digit programming data from an external source, such as the microprocessor controlled accessory which will also provide remote band selection and other functions.

Full band coverage of all six HF bands, and continuously variable bandwidth on filter widths for SSB, RTTY, and even SSTV, help to make the IC-701 the very best HF transceiver ever made. IC-701 includes two CW widths, all of this standard at no extra cost.

Sold complete with the high quality electret condenser base mic (SM-2), the IC-701 is loaded with many ICOM quality standard features. Standard in every IC-701 are two independently selectable, digitally synthesized VFO's at no extra cost. Also standard are a double-balanced schottky diode 1st mixer for excellent receiver IMD, and RF speech processor, separate drop times for voice and CW VOX, optionally continuous RIT, fast/slow AGC, efficient IF noise blanker, fast break-in CW, and full metering capability.

Price \$1380 (AC power supply extra)



The new RM-3 remote controller is microprocessor controlled for direct frequency dial-up, scan and memory functions. Price \$169.

Distributed by:

VICOM

68 Eastern Road
SOUTH MELBOURNE VIC 3205
PH. (03) 699.6700 Telex AA30566

Sydney
Brisbane
Hobart
Melbourne

681.3544
38.4480
43.6337
836.8635

Perth
Adelaide
Gold Coast
Canberra

446.3232
43.7981
32.2644
82.3581

LETTERS TO THE EDITOR

Any opinion expressed under this heading is the individual opinion of the writer and does not necessarily coincide with that of the publisher.

211 Hopetoun Avenue,
Vaucluse, Sydney, 2030.
25.9.1978

The Editor,
Amateur Radio.

Dear Sir,
I have had a certain amount of difficulty with my local Council regarding my application to erect an antenna on my own property.

I eventually submitted the plan as attached to this letter and you may if you wish publish this plan if you think that it would be of assistance to other 'Hams'.

I also had an objection from a neighbour, I persuaded the neighbour to come in my car and took him to see a similar antenna (already erected), he then withdrew his objection, so it would appear to be a good plan to show any objectors what the finished result looks like.

I trust that my experience will be of help to anybody contemplating the erection of an antenna in the future.

Yours faithfully,
Les Simons VK2NLE.

Erik W. Bierre VK2BEK
Apt. 8, 66-68 Florence St.,
Hornaby, 2077

The Editor,
Dear Sir,

Perhaps you may be interested in the following. About 6 months ago I received a letter from a young man in the U.S.S.R. He was about 26 years of age, married with a young daughter and he was a teacher of English in a smallish town.

He said he got my name and address from a U.S.S.R. ham I had worked and said he was anxious to have a pen friend in Australia.

Well, we passed several letters back and forth and I sent him a book of coloured views of Sydney. I sent it by air mail, but it was never received.

I then asked him in a letter if he would be allowed to receive a letter from me recorded on a cassette. He replied that would be fine and he would like to hear my voice.

So I recorded this — It was full of simple things about life in Australia — our Sydney climate — our wine industry etc. Then I said to him that as a radio ham I had many friends all over the world and frequently had long, interesting conversations with them. But when I contacted hams in the U.S.S.R., all I ever got was "thank you for the call, your signal is such and such a strength, my QTH is so and so, the box is so and so, Thank you for a FR QSO, please QSL". I said "It would be much more interesting if I could have longer conversations, is it that they are not allowed longer conversations? Or is it that they do not know any more of the English language?"

I sent this letter by air mail about four months ago and have never heard from him since. But yesterday, I received my tape back in the original packing. It had been opened by the U.S.S.R. authorities, tied up with string and the knot sealed with sealing wax with the imprint of U.S.S.R. on it.

Just the tape, nothing else.

Mount Victoria Police Station, N.S.W.
22nd September, 1978.

The Editor,
Amateur Radio.

Dear Sir,
On the 25th August, 1978, a Mrs. Thelma Clee, 60.5.5, suddenly collapsed and died at her residence at Mount Victoria in New South Wales and this was at the time that telephone communications had broken down in most states.

At that time I was approached at the Mount Victoria Police Station to inform the relatives of the late Mrs. Clee of her death and at that time

the Police Station was suffering also with a total communications breakdown.

The only communications I had at the time was my own Amateur Radio Station which is on the Police Station premises and as there were several States to be notified I called these states for assistance.

All messages were delivered via Amateur Radio to Police Stations in the States concerned and I would like to thank on behalf of Mr. Bill Clee of Mount Victoria, the husband of the deceased, and myself, to all amateurs who were involved in relaying these most compassionate messages, particularly VK7NFR, Fred VK2BLP, Laurie VK4UF, Doug VK4NGE, Reg VK2PT, Allen VK2ZHN/4, Vern and all other Amateurs that I have neglected to mention. Thank you most sincerely.

Yours Sincerely,
Paul Robertson O.I.C. VK3NZ
Mt. Victoria Police Station, N.S.W.

16 Hilton Avenue,
Lakemba 2195.
August 31st, 1978.

The Editor,
Dear Sir,

Our VK2 Minibulletin requests operators to operate amateur equipment donated by a Synchro electronics firm and which would help promote AR.

By all means promote AR and my services are available to any worthwhile cause, but in this instance I would be operating "tongue in cheek".

The donor did a great deal towards flooding the market with CB radio, and I doubt very much any genuine interest in AR as such.

Am I a bigot? Only to the extent that I value the AR licence and oppose any means whereby it could be downgraded, and any publication which advocates and condones the illegal use of radio equipment.

Along these lines, Amateur Radio Action publication is lacking, and has already been the loser by not getting the full backing of a lot of amateurs.

What about that amateur who was set upon by those CB idiots? Did the WIA do anything to help?

Yours faithfully,
G. Lanyon VK2AGL.

The Editor,
Dear Sir,

I am 30 years old, technical engineer in metallurgy, working in a steel plant (Sidmar, Ghent), married, father of a son (2 years) and interested in radio amateurism. I am studying momentarily electronics and radio-electricity to undergo in September an examination to obtain a licence. I have still no equipment. Radio amateurism is exorcised in Australia, too, and as I am interested in the Australian people, country and way of life, I should like to correspond with a radio amateur to exchange some books and periodicals; maybe we can make QSOs when I am licensed.

Yours faithfully,
De Moor Marc, Vredestraat 13, B-9729 De Plinte, Belgium; Europe.

Marc's address is quoted if any of our readers would like to correspond with him.—Ed.

10 David Street East,
Springwood 2777
3rd September, 1978

The Editor,
Dear Sir,

Each year the Institution of Radio and Electronics Engineers in this State offers two Efficiency Pennants for competition by Radio Clubs registered with the WIA (NSW) Education Service. This arrangement has been "running" for many years with respect to the Youth Radio Service, which has now been incorporated into the wider Education Service framework.

Determination of the winning School and Non-School Radio Clubs is on the basis of Efficiency Points for a prescribed scale with points for each YRS Certificate, each Novice examination subject and each AOCIP subject gained by Club members.

The Pennants earned for the 1977 Training Year by successful Clubs are: (i) Non-School Club — Blue Mountains Amateur Radio Club; (ii) School Club — Marist Brothers High School, Eastwood.

Arrangements are in hand for representatives of these Clubs to receive them from IREE officers. Brother Cyril Quinlan (VK2ACQ) has been engaged in Youth Radio Service and Radio Club activities for many years and has conducted very effective School and Radio Clubs in various Marist Brothers' High Schools. The Blue Mountains Amateur Radio Club has been operating Novice classes ever since the introduction of this grade of amateur licensing, and conducted the very first Trial Novice examination in 1975. The Trial Novice idea "caught on" and now is a regular feature of the WIA (NSW) Education Service's programme.

Yours faithfully,
Rex C. Black VK2YA,
WIA (NSW) Education Service.

10 Mil Terrace,
Stirling, SA 5152
8/9/78

The Editor,
Dear Sir,

I had a crack at the Ch. 5A beast. I decided to use a different argument. I wrote to the Hon. the Minister and pointed out that Ch. 5A was not an international television channel. I also pointed out that many satellites used this frequency and listed a whole raft of them.

I told the Hon. gentleman that clobbering satellites was no way to win friends at home or abroad, and pointed out to him that his department had already messed up the FM band by using it for television, and suggested that it wouldn't be a good idea to repeat such an error.

Well, I got a reply which told me that these matters would be considered and a detailed letter would follow. It must have gone into the too hard basket because I have heard no more.

I have found that Government departments will do what they are going to do, no matter how absurd. The only thing that affects a politician is votes. Fears of losing that vast salary and fat pension produce immediate action. Nothing else counts. I hate to be a wet blanket, but that's how it is.

David S. Robertson VK5RN.

34 Toolangi Road,
Aldington 3078
17th September, 1978

The Editor,
Dear Sir,

In view of the problems connected with Novice examinations, the threat to the two metre band from Ch. 5A, the coming WARC conference and the growing pirate market for amateur equipment one would think there would be a strong incentive for all amateurs to get together to try to work out some answers to these threats to their continuing existence. Unfortunately this does not seem to be the case.

A number of clubs in the Melbourne area have been meeting to discuss various matters affecting their interests. This in itself could be a good thing except for the fact that they have rather pointedly avoided asking along any representative of the Victorian Division of the WIA. A recent meeting on the 16th September was fairly widely publicised as was the fact that on the agenda there was to be a discussion as to whether — in view of the growing numbers and strength of the clubs — the WIA was any longer necessary. Although I had not been invited I felt that, as club and zone co-ordinator of the Victorian Division of the WIA, I could at least turn up at the meeting and learn something of the feelings and perhaps offer some ideas on this particular matter.

When I arrived, however, I found that it was apparently to be a highly secret affair and, after some discussion, and a show of hands, and a casting vote by the chairman, I was kicked out of the meeting. I happen also to be a member of one of the clubs which was represented at the meeting, so it seems that not only anyone from the WIA but also the members of the clubs themselves are not allowed to know what their elders and betters are discussing.

It is rather pathetic to find that just when the WIA is shaking off some of its past weaknesses

and narrow attitudes, these seem to have been inherited by the clubs. It is hardly likely that the RTTY will be affected in any way by a mild attack of megalomania among some of the leaders of a handful of local clubs, but it is most disheartening to see a cloak and dagger circus replacing what should be a co-operative effort to try to work out how each group could best play its part in working to help amateur interests — and they certainly need help! — as a whole.

Sincerely,
Roy Hartkopf VK3AOH.

RTTY NOTES

The NSW RTTY group has been restructured to represent all the RTTY operators. Not only those in NSW but in all of Australia, and has been renamed "The Australian National Amateur Radio Teleprinter Society". It is thought that the RTTY operators can assist the amateur RTTY operators in Australia to become more active in the mode and to help them become more proficient with the modern technology.

We have been running a Sunday broadcast for the past year on RTTY. Broadcast number 52 was relayed on 3rd September. This is the only official RTTY broadcast in Australia and incidentally one of only four official RTTY broadcasts throughout the world. For the broadcast we use the recognised international amateur standards of 45.45 bauds and a shift of 170 Hz. There are other standards for other services, but as amateurs we use the world-wide amateur standards, which is only logical, and the international frequencies of 7045 kHz, 14090 kHz and 146.6 MHz at 0430 GMT on Sunday mornings and 3545 kHz and 146.6 MHz at 0930 GMT on Sunday evenings.

With the use of these frequencies we have a complete coverage of Australia and the surrounding islands which of course makes us very happy. We have had requests for permission to re-broadcast the news on other frequencies. This matter is being looked into and as soon as formalities are completed it is possible that there will be a re-broadcast of the RTTY news in each capital city. The society feels that this would assist all members, not only in receiving the news, but to adjust their equipment to the correct amateur standards.

In NSW two RTTY repeaters are in the process of being activated, one in Newcastle and one in Sydney. Both these repeaters will be able to be used for the re-broadcast of news but they will also provide a standard signal for line-up of equipment. Neither of them will accept Phone or CW signals.

There are now well over 250 amateurs actively interested in RTTY throughout Australia. Many of them have become interested over the past 12 months though a great number seem to be only interested in receiving and not transmitting. But it is hoped that in the near future more will start transmitting. We need more signals on the air to make our presence felt. Just because you cannot hear, or type fast is not a good excuse. We all had to learn to type and the only way to find out where the keys are is to use them. The more that you use them the better you will become. You will find that the chaps on the air will be very patient with you and will help you in all kinds of ways to improve your typing. The act of getting on the air and using the keys is the start to good typing. We know that you are in there listening, so why not get on the air and let us all hear you.

By the time you read this the VK/ZL/Oceania RTTY contest will be over. We hope that you sent in an entry, be it ever so small, for every entry counts. It was our first venture in the RTTY contest field and we hope that it will lead to many more in the future. We hope that you will come to the party and help us make it a big contest. But it is over for this year and the results will be available early in 1979. If it was your first contest and you had some fun and a lot of experience, well there are more to come. Every time you have a letter or send a contest you are gaining experience, your operating technique

is improving, and after all that is what it is all about. If you did have a contest during the contest, please let us have your log. If for no other reason than it can be used as a check log to see that all entries are correct.

The next contest for this year is the WAEDC European contest which will be held on the 11-12th November. The operating times are 0000 GMT Saturday to 2400 GMT Sunday. Operations on all bands 3.5 MHz to 28 MHz. Though the contest is for 48 hours you are not permitted to operate for more than 36 hours. The 12 hour rest period may be taken over one but not more than three rest periods and all rest periods must be marked on the logs. Exchange of number is RST plus three figures for the QSO number, thus 599-001 for the first contact. Also there are extra points for QTC exchanges. QTC is the report of a previous QSO to a European station that you are working. As each QSO can only be reported once a different QTC must be sent each time. A maximum of 10 QSOs may be sent in each QTC. Each QTC must be in sequence. Thus when sending a QTC you must indicate QTC 3/7, that is, QTC number three and has seven QSOs reported. Score one point for each contact and one point for each QTC reported, multiplied by the number of countries that you have worked on each band. Only one contact is allowed with each station on each band. I know that it all reads very complicated but when you get into the contest and see what the other chap is doing it will all work out for you.

And finally the society has kits for demodulators, modulators, filters and other kits for RTTY work. So if you are interested please contact the society at 14 Atchison Street, Crows Nest, Sydney, and ask for information about them. If you wish to receive the newsletter of the society please forward two dollars to the above address and you will receive the newsletter every two months.

S. E. Molen VK2SG,
Broadcast and Publicity Officer ANARTS.

MAGAZINE INDEX

Syd Clark, VK3ASC

BREAK-IN March 1978

A 2 Metre Linear Amplifier; Some Considerations for the Specification and Use of AT Quartz Crystals; Modifications to the Yaesu FT101 to Cure Strong Signal Overload; Radio Activities at the Third Asia-Pacific Jamboree; The AMSAT-OSCAR D Spacecraft.

BREAK-IN June 1978

The Jamboree Kilsat Radio; Antenna Coupler; 100-220 Watt Transceiver Power Supply (12V, 10-20A); The SWR Bridge in English; A Few Comments on the ICOM Model IC701 HF All Band Solid State Transceiver.

HAM RADIO May 1978

Windom Antennas, Selective Receiving Antennas; Multiband Vertical Antenna System; RX Noise Bridge Calculations with the HP-25 Programmable Calculator; 80 Metre Ground Plane Antennas; Omega Matching Network Design; Improved Indicator System for the Hygain 100 Antenna Rotator; Calculating Antenna Bearings; OSCAR az-el Antenna System; 1296 MHz Hygain Antenna; Antenna Gain Calculations.

HAM RADIO June 1978

RTTY Selcom; OSCAR 8 Receiving Pre-amplifier; Single IC Touch-Tone Decoder; Antenna Guying; Colpitts VFO Design; RF Choke Performance; Preventing Transmitter Leakage; Vertical Antennas for Portable Communications; PI Network Design; Satellite Tracking Equations for Texas Instruments Calculators; Protecting Solid State Devices; Instantaneous Shut-Down for High Current Power Supplies; Command Debugging Circuit; Grid-Dip Meter; VHF Prescaler Packaging; Precision Voltmeter Calibrating the Gyro; Synthetic Indicator.

RADIO COMMUNICATION July 1978

IARU Region 1 Conference; A Frequency Translator for the RA117; Simple Bias Circuit for Solid State

Linear Power Amplifiers; Modification to the Channelized 144 MHz FM Transmitter Receiver; An All-band UHF TVI Filter; Radio Communications and the ITU.

RADIO COMMUNICATION August 1978

Facsimile; A Digital Oscillator Stabilizer; An SSB Filter for the FRG7; Radio Communications and the ITU; Microwave Band-Planning.

RADIO ZS May 1978

QQ Q1 April 1952; East Rand Branch Repeater.

SHORT WAVE April 1978

Amateur Radio-Communication or Technology, or Both? Getting Going on OSCAR 8; The Direct Antenna; The Weak Link; Reverse Repeater on the Trio TS-700; Watching Sunspots.

SHORT WAVE May 1978

IRT for the Heathkit "SSB" Range of Transceivers; A Digital Frequency Meter; Antennas — The Weak Link, Part 3.

73 April 1978

Ecstasy in Multimeterland; How to Succeed on 1296; Build This Digital Mail Game; New Life for Old Dipper; How to Use ICs; You're Still Using Tube-Yuks; The Challenge of 10.5 GHz; In Search of the Ultimate; Feeding a Hungry Micro-Computer; The Extinction; At Last — A Use for Your Computer; Now Anyone Can Afford a Keyboard; Godbolt Strikes Again; The Kilograms are Coming; If You Want to Know Where You Are; The Interimenter's Dream Calculator; Toward a More Perfect Weather Picture; Improve Your HW-2021; Simple CW Interference Filter; The Best Probe Yet; How Sunspots Work; Schottky: A New Generation; Use Noise to Tune Your Station; How? Thwart Ma's Dial System; The Doubtful Whammy Most Clarifier; Danger! Micro-wave Radiation; CW The Hard Way.

73 May 1978

A Keyer? Who Needs Another Keyer; Official FCC RFI Report; Hey, Old Timer! — The Broadband is Back; Fake 'Em Out with Remote Control; Now — A Digital Capacity Meter; DMM Survival Course; What Happened to SSTV; Build This Exciting Simple Keyer; Can Ham's Own Radio Rats?; Why Not Go First Class; Diary of a Survivor; How Good is the North Star Disc; Pseudorandomness is Just Not Good Enough; Beethoven Need Not Fear; Hex Converter for True-Blue Operators; The Cheaper Beeper; Semi-Instant Program Loading; The Super Select-Orbit; the IC-102 Goes Transceiver; The Wizard's Delight Repeater Controller; Another Ten Minute Timer; Make Antenna Tuning a Joy; If You Want to Know Where You Are; Home-Canned Dummy; De-Zap Strip; No, Not Another 22S Mod; Scare the Hell Out of Burglars; The COR Goes Solid State.

BREAK-IN June 1978

The Jamboree Kilsat Radio; Antenna Coupler; A 100-220 Watt Transceiver Power Supply (12V, 10-20A); The SWR Bridge in English; A Few Comments on the ICOM Model IC701 HF All Band Solid State Transceiver; Orbital Predictions for OSCAR 7 and 8.

Two-Track Intercom; Filters for the Amateur Audio Amplifiers at a low Cost; Switchable Power Supply; NZART Conference 1978; Conference Activities 1978.

SHORTWAVE June 1978

Amateur Radio — Communication or Technology, or Both; And It Had an Ivory Knob; A Digital Frequency Meter.

The Magazine index is very short this month due to the delay of magazine arrivals attendant upon the wharf strike.

QSP

STATISTICS — AMATEUR STATISTICS

The 30th June 1978 comprehensive statement issued by the P. & T. Department shows 5400 licensed amateur radio operators in Australia. This is 1577 more than 30th June 1977. Leaving aside 22 stations licensed in the external Territories (20 full, 1 restricted and 1 Novice) full licences totalled 5369 (up from 5000), limiteds 2689 (up from 2362) and Novices 1320 (up from 1148). The number of stations in each State was (figures in parentheses are full, limited and novice in that order): N.S.W. 3312 (1924, 821, 567), Vic. 2615 (1459, 902, 254), Qld. 1071 (605, 341, 125), S.A. 1054 (567, 301, 186), W. 705 (429, 177, 102), Tas. 321 (188, 81, 44), A.C.T. 204 (147, 36, 21) and N.T. 95 (52, 23, 23).

1979 SUBSCRIPTIONS

- WIA Members are reminded that 1979 Subscription notices will be mailed out during December.
- 1979 is the year of the great WARC when amateur radio and the WIA will need every ounce of support — so please arrange early payment of 1979 subscriptions when you receive the notice.
- Members wishing to be re-graded as pensioners — write NOW for clearance — write to your Division NOW.
- New members joining in 1978 — you will receive a notice for a pro-rata amount to render you financial to 31st December 1979. Early payment of this will avoid problems with AR.
- All members are reminded that AR address labels will be automatically suppressed for those still remaining unfinancial after a short period of grace.
- ADDRESS CHANGES, CALL-SIGN CHANGES, OTHER CHANGES: Write NOW to WIA, Box 150, Toorak, Vic. 4132, advising all changes—please do not wait for subscription notice to reach you. ■

HAMADS

- Eight lines free to all WIA members. \$9 per copy for non-members.
- Copy in typescript please or in block letters to P.O. Box 150, Toorak, Vic. 3142.
- P.O.s may be charged at full rates.
- Closing date: 1st day of month preceding publication. Cancellations received after 12th of the month cannot be processed.
- QTHR means the advertiser's name and address are correct in the current WIA Radio Amateurs Call Book.

FOR SALE

Transceiver SSB/CW, 10-11.80 metres, solid state, 250 watts PEP input, 240 volt AC or 12 volt DC operation, Dynamic mic. included and inbuilt speech processor installed in transceiver, de lase mobile mount and 12 volt cable, owner's manual included, new. Complete electrical noise suppression kit for car, boat supplied with transceiver, type Halliforters FPM 300 Mk II, late model, made in USA, excellent condition, \$495; also solid state amplifier, 3-29.5 MHz, receiver pre-amplifier built in, switchable, 8 watts PEP drive, 160 watts PEP output, usesa pair Motorola MRF 453 rugged high power transistors, 12 volt DC, new, made in USA, \$200. VK2JQ, Ph. (02) 36 7756. Write PO Box 505, Bondi Junction 2022, NSW.

Hygain 204BA 20m full size Yagi, 4 elements, 26 ft. boom, good cond., 3 yrs. old, \$165. B. Barthol VK3VU, Ph. (03) 80 8424 A.H.

Yaesu FR7 Rx, with manual, as new, \$230. VK2BHW, QTHR. Ph. (02) 27 6432 Bus., or (02) 449 2188 A.H.

Realistic AX190 Rx, amateur bands, 3-29.5 MHz; also CB band, new cond., \$200. VK2ZKX, QTHR. Ph. (02) 602 3245, evenings only.

Yaesu FT391D Tcvr, complete with all filters; Yaesu FP301D, de lase power supply with 10, etc.; Yaesu PV201, external VFO; Yaesu mobile cradle for 301 Tcvr; all for \$1,125, ONO. VKANDE, QTHR. Ph. (07) 341 4767.

T9-520, in good cond., all accessories and original carton, \$570. Richard Cowles VK2NBN, QTHR. Ph. (02) 699 8403, after 6 p.m.

FT101 160m thru 10m, incl. 11m xil mike, fan, English and Jap manuals, excellent order, \$255; AR13 with genemotors, cables, etc., any reasonable offer. VK2LH, QTHR. Ph. (02) 456 2027.

ICOM IC202 2m SSB Transceiver, mint cond., with small solid state linear and RF preamp, \$175. VK2BHH, 8 Ida Street, Hornsby, NSW. Ph. (02) 476 2818.

Unemployment forces sale of complete station in mint cond., complete with original cartons and manuals. Drake TR4C with spare new finals, \$700; RV4C remote VFO, \$150; 34PWB noise blanker, \$100; AC4 power supply, \$150; Yaesu FRGT Rx, \$300; KW107 super match, \$200; Mosley TA33, \$150; Drake TV3300 low pass, \$25; Shure 201 amp, \$15; Tech Tracker GDO, \$45; mike mixer pre-amp, \$10; VK2ASH, QTHR.

Morse Code Cassettes, C60s, beginners up to 12 words/min. Interstate agents, enquiries welcome. Graeme VK3ZR, QTHR. Ph. (03) 99 4645.

HC500 Antenna Tuner, 90-10m, still in box, mint cond., handbook, \$100, ONO. VK2BBD, 128A Boroilale Road, Duffys Forest 2084. Ph. (02) 450 2026.

TS520, mint cond., manual, best offer. VK2XR, QTHR. Ph. (02) 458 1389.

Swan MB80A Miniature Transceiver, 160W input, all solid state, Ideal for 80m mobile/portable/home station, \$270. VK2AVQ, QTHR. Ph. (02) 88 2359, A.H. TS520S Digital Readout CW Filter, DC-DC converter, D104 desk mic, \$950. Dave VK2NGB, QTHR. Ph. (02) 804 4241.

Yaesu FT101B VFO \$110; YP150 Dummy Load Wattmeter \$95; SP101 ext. loudspeaker. All suitable FT101E. Also FT7 Tcvr \$485. All as new, including manuals and original cartons, absolute mint condition. VK7NAB, Ph. (03) 31 7914 — Launceston. Genuine offers only.

FT101E Tx (latest type: front panel processor level control) plus 600 Hz CW filter, little use, exc. cond., orig. packing, \$825 ONO. FR-101D digital Rx, 160m-2m ham bands plus CB plus SW BC bands, separate AM, SSB, FM and CW filters, exc. cond., orig. packing, \$1100 ONO. Hygain 18AVT/VH vertical, 80m-10m, with radials, \$110. Or \$1950 the lot, incl. cables, LP filter, key, etc. Going off seas. Alan Beagley VK4NDV, Ph. (07) 371 1811 bus.; (07) 370 8343 A.H.

Ken KP202, fitted CH, 40, 50, R2, 4, 6 and 8, spare crystals for R7, complete with nicads, charger and helical ant., \$150. VK1CDR, Ph. (082) 66 3835 bus.; or (062) 47 4104 A.H.

Yaesu FRQ7 Rx in mint condition, \$300. VK3ZJE, QTHR. Ph. (03) 90 1166.

ZL Repeater Xiala, complete set for chans. A, B, C, D for Ken KP202, hand-held FM transceiver, \$32. Jim Preston VU2PJ, QTHR. Ph. (03) 364 1778. Teletype model FRXTA combined typing repeater/transmitter/distributor in one unit, no cover, \$65. Teletype model 14 transmitter/distributor, \$35. Both set to 45.45 baud. Can be set to 50 baud on request. Steve King VK3ZY, QTHR. Ph. (03) 277 4748.

Novice Station — Yaesu FL50 Tx, FV50B VFO, xials, spare tubes, \$170 ONO. DX160 Rx, as new, \$150. ONO. M. Hooper VK5ZMAN/MH. Ph. (08) 337 0643.

Tandy TRS-80 Microcomputer and Power Supply. Exc. cond., in orig. carton, instr. book and tapes, \$490. David VK2NOB, Ph. (02) 476 1048.

Icom IC701 Deluxe 200W Tcvr and matching power supply, the whole only 4 weeks old, still in carton, features dual VFOs, SWR meter, desk mic, digital freq. display and full broad band automatic tuning, \$1125; Tcvr only, power supply, \$225 ONO. Steve VK4NHM, Ph. (07) 273 1389.

Yaesu FTDX100 Transceiver, inbuilt power supply 240V AC/12V DC, fully solid state except for driver and final tubes, excellent condition, C/W all cables, plugs, microphone and manual, \$450. G. Gasparis VK3AAU, QTHR. Ph. (03) 651 1360 bus., (03) 725 7970 A.H.

Kenwood TS205 160m-10m Transceiver with digital frequency readout, perfect condition, including desk mic. and service manual, \$1150. L. MacDonald, 317 Eureka St., Ballarat, 3250. Ph. (053) 31 3186 (09.00-17.00 weekdays).

FT101E, good cond., \$725; Standard SCR148 2m hand-held and SCR450 70cm hand-held, plus charger and nicads, aerials, manuals, \$400 the lot; Cannon telephoto lens 25-100mm, C-mount TV camera lens. Lionel VK3NM, QTHR. Ph. (03) 83 3710.

Collins 755-2 Rx with NB, CW filter, extra xials, \$420. John Pluke MD 910A thru RMS wattmeter 10 Hz to 7 MHz, \$85. VK1VP, QTHR. Ph. (062) 48 5882.

Dentron 80-140 Random Wire Antenna Matcher, \$70. Len VK2NYE, Ph. (046) 77 1484.

Kenwood TR7200G VHF/FM Transceiver, complete with all accessories and English instruction manual, crystals for Channels 8 and 50, in perfect order, unit has never been used as mobile, \$135. Ross Treloar VK2BZF, Ph. (02) 235 5267, office hours.

Swan Transceiver, model 240 Mk II, 80-40-20, VFO, USB-LSB-AM, with mic. and spare valves, \$150; plus external matching 240V power supply with additional VFO, VOX and 100 KC marker, \$100; plus mobile Swan DC power supply, \$75; or the lot \$250. All in excellent condition and appear, with service manual and original carton. VK2LX, QTHR. Ph. (043) 96 4231.

Mosley TA33 JR. 3 element, 20-15-10 metre beam, had little use, complete, ready to erect, \$100; BSR stereo turntable, diamond styli, mounted on 5-ply base, good condition, \$30; four 15 ohm, 10W 8 in. (2 round, 2 oval) twin cone speakers, \$8 ea. or \$30 for 4. VK2BDB, QTHR. Ph. (02) 546 2163, Blakehurst.

Yaesu FT75B HF Transceiver, one xial each band, DC75, DC supply, FP75B AC supply, FV50 VFO, mobile mounting bracket, manuals, excellent condition, \$420; Homebrew 70A slow scan TV monitor, P26, 8 inch tube, WEMK scan converter, \$350 ONO. Allan VK2GR, QTHR. Ph. (02) 47 4344.

Swan 250 Transceiver and remote VFO with PSU \$400; 6 Mtr linear amp, TB750 final and PSU, \$100; 42C2 transceiver with PSU, \$50; University valve tester, \$10; two Sellers' motors; others: RA4 wiring flap motor, others; MK3 Pye carphone on 5.1 MHz, \$10; home brew phasing exciter SSB 5-2 Mtrs and matching linear amp. QOE/O4 finals, \$100; 6 Mtr 8 element yagi, as new, \$40. Many new and used valves, some hard to buy, others. Estate sale VK3ZKW, Contact G. Schiennetti. Ph. (088) 52 1447, 8-5 p.m., Mon-Friday.

Icon IC701 and matching AC supply, IC701PS, in original mint condition, includes condenser, desk mic, manuals, etc., only one month old, \$1395 for both, air freight anywhere in Australia. VK3TK, QTHR. Ph. (03) 311 2363.

Communication Rx, Realistic SX190, covers 50 kHz portions of the 80, 40, 30, 21, 25, 20, 19, 16 and 11m bands, plus 2 additional xials supplied for increase coverage, with 70ers manual and matching external speaker. Price \$175 or near offer. Ideal SWL Rx. Reed Model 78 teleprinter, VGC, \$65, W. Babb, Ph. (03) 337 4902.

Forest Phone (AWA), good working cond., converted to 160m, 1.825 MHz, AM, 10W RF output, \$90. John VK3BJE, QTHR. Ph. (03) 435 4589.

Beacraft Model 210, 5 band programmable VHF/UHF scanning Rx, mint cond., \$370. Ph. (03) 232 9816, A.H.

Bendix Frequency Meter BC221AK, Aust. version with built in AC/DC power supply, as new cond., \$80; Swan 500, the famous one, complete with Aust. heavy duty power pack (AC), 460W PEP, 80 to 10, original unmarked cond., and a proven top performer with manual, \$480; Heath HW22 20m transceiver, 200W PEP, HB PS, excellent performer and cond., manual, \$275; TV camera power supply, RCA mod. WP168, M1-26094B, solid state regulated, metered max. 350V at 2A, A1 order, \$35; Bendix power supply MP28B, large generator, \$40V, 450 mA, regulated and remote control modulation EN7 GRS PP400, \$20; Vaco Electric generator, 12.5V to 625V at 225 mA, \$10; Inverter, 12V to 240 AC, 250W, goes well, \$60; Europa transverter, new, 28 MHz to 144 MHz, sensitive Rx and 200W PEP output, an economical way to get on 2m sideband for the coming DX season, \$200. VKDSD, QTHR.

FT75B, FT75B, DC75B and FV50C (VFO), \$500 ONO; AR22 rotor, \$55 ONO; National AM FM SSB, 8 band portable AC DC receiver Model RF150LB, \$125 ONO. VK4NAX, QTHR.

For Novice and Full Call Candidates. The best and cheapest more practice tapes — only \$2 posted. Write mentioning more speed to WIA (NSW Div.) Morse Service: F. Santos VK2BYJ, 8 Cooper Street, Blacktown 2148.

WANTED

Broken Kyokuto or similar Tx in any condition. Richard Coombs VK2NBN, QTHR. Ph. (02) 699 9403, after 6 p.m.

TR10 9R-590S Communication Rx in good operating condition, any reasonable price. Considered details to Tony Jutner, Yuendumu, via Alice Springs 5751, NT.

RT155, BC348 and 1674, any parts, sub-assemblies or cots, also ch. 8 Rx xtal for 1674. Replies to Dave Morrell VK5NDM. Ph. (08) 225 6647, Bus., or (08) 44 4228 A.H.

HF Transceiver FT200 or FDX401, etc., together with matching power supply, external VFO also considered; a good price is offered for a good rig. Peter Bottrell L80257, QTHR. Ph. (09) 330 4975 A.H.

Valve Comm. Rx, reasonable sensitivity and selectivity, covering all HF amateur bands. Details to Adam Carter VK5NKA, 8 Swan Street, Brighton, SA 5048. Ph. (08) 296 2768.

Circuit and Tune-up Instructions for RCA AR88(LF) receiver, will arrange photocopying if necessary. VK2ZJF, QTHR. Ph. (02) 966 4539.

Dual Gang Transmitting Capacitor, 250 + 250 pF, 0.075 in. spacing. VK5HC, 10 White Street, Millersburg, SA 5290.

Yaesu FL2100B Linear Amplifier or equivalent, for use with TS520. "Bill" VK3BAV, QTHR. Ph. (03) 598 8665.

6m SSB Transceiver FT200B or similar. Lionel VK3NM, QTHR. Ph. (03) 88 3710.

Magazines, Pest Copies of AR (before 1950) and Radio, Television and Hobbies (before 1932). VK3GCC, QTHR. Ph. (03) 561 1151.

HT32 Transmitter. Price and condition. VK3ACN, QTHR.

Noise Bridge in any condition, preferably Omega-T type TE7-01. Bob Slutzkin VK3SK, QTHR. Ph. (03) 527 1851.

SR-C146 or Ken KP282 hand held transceiver including charger; Swan 700CX inc. power supply; Telescope over in good order. Price and particulars to VK3GM, QTHR. Ph. (053) 49 2480.

Dick Smith or similar 10 or 11 metres to 80 metre transceiver, 30 watt PEP linear amp., 10 metres or similar. Details required. VK4NAX, QTHR.

For all Novice Candidates. The revised (600 new questions) and commercially printed new edition of text of 1000 questions for Novice licence candidates. Written to suit new official Novice syllabus. \$3 post paid. WIA (NSW Div.) Education Service, PO Box 109, Toongabbie, 2146.

EXCHANGE

Drake 2B Rx and Hammerlund HX50 Tx, exchange for a good quality general coverage Rx -5.30 MHz, incl. SSB reception and good bandspread. VK3ACD, QTHR. Ph. (056) 21 2484.

TRADE HAMADS

XITEX "Glass Teletypewriter", needs only a keyboard and TV set to originate and display 16 lines of 64 chars; switchable for 45.45 Baudot-110/300 ASCII, 20 mA or TTL interface; full U/L and Greek chars in ASCII mode, addressable cursor; feed on-board PSU 8-TV AC or plug into an S-100 slot; micro computer controlled pre-programmed; full kit, \$159, including delivery and sales tax; suitable keyboard kit, \$70. From The Micro Shop, Box 207, Gawler, SA 5118.

Trying to sell your gear? Let us help you in the next issue of Dalcorn's Amateur Equipment Listing. It's read by people wanting to buy gear like yours. For details write to PO Box 37, Fisher, ACT 2611.

Want something specific? You could find it in the current issue of Dalcorn Electronics Amateur Equipment Listing. For details write to PO Box 37, Fisher, ACT 2611.

Position Vacant — Technician with good experience solid state audio equipment and a knowledge of RF transmission required as technical assistant at a progressive provincial broadcasting station. Successful applicant will be encouraged to aim at securing broadcast operator's certificate of proficiency. Apply "Technician", P.O. Box 1885, Brisbane.

QSL cards, log books, contest log sheets. Send a 20c stamp for samples and prices to Linda Luther VK4VV, P.O. Box 498, Nambour, Qld. 4560.

OBITUARY

KEN GILLESPIE VK3GK

Ken passed away on 23rd September, 1978, after suffering a long period of illness.

Ken was one of the "younger" old-timers, and he saw active service with the Merchant Navy in World War II as a ship's radio operator.

He later joined the Victorian Railways as a signaller but retired early due to ill-health.

He was an excellent CW operator and an avid home brewer.

Ken, who was well known to many of Australia's amateurs, will be remembered for his active involvement with Institute affairs.

For over 12 years Ken was associated with the publications committee of Amateur Radio magazine and his talents as a draftsman were widely known.

In recent years, Ken's health deteriorated, however he still attended the monthly committee meetings in an advisory capacity.

He was active on the committee up to time of his death.

One of Ken's greatest achievements was in the operation of and his total dedication to the Melbourne Science Museum's Amateur Radio Station VK3AOM.

Ken was one of the driving forces behind the original installation and daily functioning of the station. He enjoyed meeting members of the public and promoting amateur radio.

Ken often mentioned the lack of voluntary assistance given by other amateurs in helping to maintain the daily operation of the station, and one of his last requests was that we bring to everyone's notice the importance of this station.

It is often said that no one is irreplaceable, and this statement is quite true, but in Ken's case from his most active association with the Institute, the job will be that much more difficult.

On behalf of the WIA Executive, the WIA Victorian Division, and the AR Publications Committee, we extend our deepest sympathies to Ken's wife and family, and to all who were associated with him.

Bruce Bathols VK3UV

In accordance with Ken's request, if any amateurs can offer some assistance for a short period of duty each month at the Melbourne Science Museum Station VK3AOM, please contact Paul Toner VK3AAO, Ph. (03) 289 1469, or the Victorian Division Rooms (Ph. (03) 41 3535), 412 Brunswick Street, Fitzroy.

SILENT KEYS

It is with deep regret that we record the passing of —

Mr. J. HARVEY VK4ZJO/NJH
Mr. W. H. PETERSON VK8VL
Mr. R. S. HUGO VK6KW
Mr. L. L. GILLESPIE VK3GK
Mr. K. F. CLARK VK7CK

LEOPOLD FRANCIS CLARK VK7CK
Radio amateurs around Australia and indeed in many countries throughout the world will be saddened to hear of the sudden passing of Leopold Francis Clark, VK7CK. "Poley" as he was known, died at his home at Lanana on the Tamar River in northern Tasmania on September 15th, 1978. He was aged 77.

To my knowledge, Poley received his AOCIP in early 1932 and was active from his home at Upper Natons on the North West Coast where he was engaged in farming.

It was this location that Poley constructed and operated his own electricity supply by harnessing the waters of a small creek on the property and using a small water turbine coupled to an ASEA alternator.

This electricity supply was used to power machinery on the farm and also to run the various rigs that Poley used. At this time, the antennas used were mainly long wires and end fed arrays.

Poley was a member of the Old Timers Club and had travelled extensively throughout the world meeting his radio contacts in person. His operation on the bands identified him as one of the gentlemen of the air, kind and courteous and always more than ready to assist his fellow amateurs and newcomers to the band.

To Poley's wife Etta and to all the members of the family, we extend our deepest sympathy.

M. G. Bursleigh, VK7JU

ADVERTISERS' INDEX

AMATEUR ELECTRONIC IMPORTS	12, 32
AMATEUR'S PARADISE	13
AMATEUR RADIO ACTION	33
BAIL ELECTRONICS	34, 35
BAY CITY ELECTRONICS	19
BRIGHT STAR CRYSTALS	12
BWD ELECTRONICS PTY LTD	7
CHIRNSIDE ELECTRONICS	52
CUSTOM COMMUNICATIONS	44, 45
DICK SMITH ELECTRONICS	51
EMONA ELECTRONICS	26, 27
GFS ELECTRONIC IMPORTS	14
GILCO	13
GRAHAM STALLARD	40
HAM RADIO SUPPLIES	2
E. ROOMS	12
SCALAR INDUSTRIES	5
SIDEBAND ELECTRONIC IMPORTS	43
SIDEBAND ELECTRONIC SALES	6, 7
SOUTH EASTERN RADIO GROUP	19
TRIO-KENWOOD	21
J. VAILE	13
VICOM	20, 46
WESTERN ZONE (BALLARAT)	42
WILLIAM WILLIS & CO PTY LTD	19

CHIRSIDE ELECTRONICS

CHIRSIDE ELECTRONICS FOR JUST A PLUG OR A COMPLETE STATION WE HAVE IT ALL
for lowest prices, and best after sales service and, spares backup.



FT-101E \$919

YAESU

FT-901DM, 160-10M Transceiver.....	\$1599.
FT-901DE, 160-10M Transceiver.....	\$1375.
FV-901, External VFO for FT-901, 40 memories.....	\$429.
FC-901, Antenna coupler incl SWR and PWR.....	\$269.
YO-901, Monitorscope for FT-901, inc. pan adapt.....	\$TBA.
TV-901, Transverter for FT-901, 4M, 2M, 70cm.....	\$TBA.
SP-901, External Speaker for FT-901.....	\$53.
FT-101E, 160-10M Transceiver.....	\$919.
FT-7, 80-10M Transceiver.....	\$529.
FP-4, Matching Power Supply.....	\$78.
FRG-7, General Coverage Receiver.....	\$369.
FRG-700, Digital General Coverage Receiver.....	\$675.
FT-227R, 2m, Mobile Transceiver.....	\$369.
FT-225RDM, 2M, ALL Mode Transceiver.....	\$995.
FL-2100B, 1200 Watt Linear Amplifier.....	\$519.
FL-110, 200 Watt DC Input Linear Amplifier.....	\$245.
YO-101, Monitorscope for FT-101E.....	\$379.
YP-150, Dummy Load-Watt Meter.....	\$112.
YO-844, Desk Mic.....	\$52.
YO-148, Dynamic Desk Mic.....	\$49.
QTR-24, 24 hr. World Clock.....	\$33.
PV-101B, Matching VFO for FT-101E.....	\$185.
YC-500S, 500 Mhz. Frequency Counter.....	\$510.
YC-500 J, 500 Mhz. Frequency Counter.....	\$359.
FTV-250, 2M Transverter.....	\$329.
SP-101B, Matching External Speaker for FT-101E.....	\$53.
YO-601, Digital readout Adaptor for FT-101E.....	\$279.
FC-301, Antenna Tuning unit inc. SWR, Per meter.....	\$239.
YO-301, Monitorscope.....	\$379.
Optional Crystal Filters.....	\$59.
FF-501, DX 2Kw Low pass filter.....	\$41.

The high quality professional "EMOTATOR"
Powerful rotation with independent braking systems. Designed to support and rotate YAGI type antenna



EMOTATOR
ROTATORS

103L8X, Medium Duty.....	\$169.
502CXX, Heavy Duty.....	\$243.
1102MXX, Extra Heavy Duty.....	\$369.
502MXX, Extra Heavy Duty.....	\$395.
502 Mast Clamp.....	\$32.
103 Mast Clamp.....	\$22.
VCTF-7, 7 Core Cable, per Metre.....	\$1.20
VCTF-6, 6 Core Cable, per Metre.....	\$1.00.

DIAWA

DR-7500S, Medium Duty.....	\$180.
DR-7600D, Heavy Duty.....	\$248.



ANTENNA COUPLERS.

HC-75, Tokyo Hy-Power Labs. Transmatch 75W PEP.....	\$79.
HC-250, Tokyo Hy-Power Labs. Transmatch 250W PEP.....	\$100.
HC-500A, Tokyo Hy-Power Labs. Transmatch 500W PEP inc. 160M.....	\$142.
HC-2500, Tokyo Hy-Power Labs. Transmatch 2.5Kw PEP.....	\$199.
AT-200, Kenwood, 200 Watts.....	\$174.
FC-301, Yaesu, 500W Inc. SWR and PWR Meters.....	\$269.
FC-901, Yaesu, 500W Inc. SWR and PWR Meters.....	\$269.

HI-MOUND

MORSE KEYS.

HK-707, On standard base with dust cover and knob.....	\$25.
HK-710, De Luxe heavy duty morse key.....	\$49.
TC-701, Practice keyer with built in Osc.....	\$21.
EKM-1A, Morse Practice Osc.....	\$16.
HK-708, Operators key with dust cover.....	\$24.
HK-708, Operators key.....	\$23.

MISCELLANEOUS ACCESSORIES.

SWR-200, Large dual meter SWR.....	\$78.
590C, 5 position coax switch.....	\$39.
Diawa 2 Pos. Coax Switch.....	\$25.
LP-42, Drake Low Pass Filter, 200W.....	\$25.
TWS-120, 2 Position slide coax switch.....	\$18.
M130, Diawa Mic. compressor.....	\$70.
50-1b, Foam filled coax double shielded 2.02 dB loss per 100 feet.....	\$1.20 per metre.
RG-58U, Thin coax, per metre.....	\$0.00
PL-259, Bumper Mount 50-DB.....	\$1.50
FT-501DX, Low Pass Filter.....	\$41.
25-100, Bumper Mount 3-8x 24 Thread.....	\$10.
Wide Range of Coax Cable and Connectors in stock.....	
MC-440, RF Speech Processor.....	\$135
Porcelain Egg Insulators.....	\$0.00

VALVES.

6J56C.....	\$12.50
6KD.....	\$13.00
572B.....	\$58.00
6146B.....	\$13.50.

Mobile Antennas.

80M Helical.....	\$35.
40M Helical.....	\$35.
20M Helical.....	\$35.
15M Helical.....	\$35.
10M Helical.....	\$35.

ALL Adjustable Trip Rod for easy SWR

Yaesu Mobile Set, RSL Base and Mast plus 80-150M Whips.....	\$79.
BPM, Bumper Mount (Adjustable) to suit Helicals.....	



TS520S

\$729

KENWOOD

TS-520S HF Transceiver ac only.....	\$729.
TS-820S HF Digital Transceiver ac only.....	\$1179.
SP-520 Matching speaker for TS-520S.....	\$37.50
SP-820 Matching speaker for TS-820S inc. filters.....	\$62.
VFO-520 Matching VFO for TS-520S.....	\$165.
VFO-520 Matching VFO for TS-820S.....	\$147.
SM-220 Monitor Scope Kenwood series.....	\$319.
DG-5 Digital Display for TS-520S.....	\$194.
DS-1A DC Converter TS-520-820.....	\$374.
DS-5 Pan Adapter for TS-520S.....	\$60.
DS-5 Pan Adapter for TS-820S.....	\$60.
AT-200 Matching Antenna Tuner Power meter.....	\$174.
Optional crystal filters.....	\$54.
MC-355 Hand Mike HI Z.....	\$20.
MC-50 Base Mike HI and LO Z.....	\$52.
TS-120 80-10M Mobile Digital Display 30W PEP.....	\$TBA.

TOYO. \$18.

2 Position COAX Slide Switches

3.5-430 mHz. YES POST FREE!!!!



ANTENNAS

HIDAKA.



BANKCARD

V5-33, 3el. Triband Beam 20-15-10M Inc. Balun.....	\$259.
V5-22, 3el. Duoband Beam 15-10M Inc. Balun.....	\$173.
V5-41-80KR, 80-10M Trapped Vertical.....	\$129.
V5-RG, Radial Kit for V5-41-KR.....	\$35.

HY-GAIN

18-AVT 80-10 M Vertical.....	\$129.
TH-3 Mk.3 20-15-10 M Beam.....	\$255.
TH-3 Jr. 20-15-10 M Beam.....	\$196.
TH-6 DXK 20-15-10 M 6 EL.....	\$329.
HI-QUAD 3 El Quad 20-15-10 M.....	\$285.
BN-86 1-1 Matching Balun.....	\$24.

ICOM

IC-701, HF 160-10M Transceiver.....	\$1299.
IC-202E, 55B Portable Transceiver.....	\$219.
IC-225, FM 10 Watts 2M Mobile Transceiver.....	\$289.
IC-211, ALL Mode 2M Transceiver.....	\$730.
IC-280, Mobile 2M Digital Transceiver.....	\$379.
IC-701PS, Power Supply.....	\$275.

NEW IC 280 NOW AVAILABLE.

2 M.10 W Transceiver
spacing 144,148

EX-STOCK ALL Digital

Remote Computer Controllable

3 memories YES 3

OUR PRICE ONLY **\$379.**

CHIRSIDE ELECTRONICS

26 EDWARDS RD.

LILYDALE 3140.

PHONE (03)726 7353

All prices include Sales Tax. Freight and Insurance extra.

Now also available

All Australian made DUO-Band Beams -15-10 M.4 elements only \$159.00



MADE WITH LOCAL COMPONENTS.

SOLID CONSTRUCTION.

DUO BAND 15-10 M

BUILT IN AUSTRALIA.

Soon available ALL BAND trapped verticals.

DEALERS WANTED IN ALL STATES NOW.

NEW!!

SOLE AUSTRALIAN DISTRIBUTOR
CHIRSIDE ELECTRONICS.

ALL AUSTRALIAN MADE TRAP BEAMS,
FOR AMATEUR BANDS.

DUO BAND BEAM \$159.
80-10 M Vertical. \$109.

MADE BY ANTENNA,
SPECIALISTS IN HAM
ANTENNAS.

Prices and specifications are subject to change without notice.

THE BULLETIN

WEST AUSTRALIAN SUPPLEMENT TO "AMATEUR RADIO"

NOVEMBER 1978.

PATRON : His Excellency the Governor,
Sir Wallace Kyle, G.C.B., C.B.E., D.S.O., D.F.C., K.O. St., John.

PRESIDENT: Mr. L.A. Ball VK6AN.

SECRETARY: Mr. P. Savage VK6NCP.

TREASURER: Mr. A. van den Avoort VK6CU.

BULLETIN: All material for inclusion in the Bulletin should reach
the Editor by phone, (4442909) - on air, or by mail to :-
22 Salisbury St. LEEDERVILLE. 6007.
before the 10th of each month.

CORRESPONDENCE:

All other correspondence should be addressed to the
Hon. Secretary,
W.I.A. (W.A. Division)
G.P.O. Box N1002.
PERTH. W.A. 6001.

DIVISIONAL NEWS BROADCAST.

VK6AWI

SUNDAY 0130 GMT.

80 Metres	SSB	3600	KHz.
40 Metres	SSB	7080	KHz.
20 Metres	SSB	14100	KHz + 14175 KHz.
10 Metres	SSB	28550	KHz
6 Metres	FM	52.656	MHz
2 Metres	FM	via CH 2	repeater.

News Co - ordinator VK6JY 2931109.

GENERAL MEETING: Held on the THIRD TUESDAY of each month at SCIENCE
House, 710 Murray St., West Perth., commencing 1145 GMT.
BRING A FRIEND * PROPOSE A NEW MEMBER !

COUNCIL MEETING: Held on the FOURTH TUESDAY of each month at the Scout
Hall, Cnr Joseph & Woolwich Sts, West Leederville., 1130 GMT.
Observers welcome.

The 1979 Annual Conference of the New Zealand Association of Radio
Transmitters (Inc.) will be held at Upper Hutt, New Zealand, between
June 1st and 4th 1979.

Overseas visitors to New Zealand are welcome to attend this
conference. Registration forms are available from the Secretary,
1979 Conference Committee, P.O. Box 40-212, Upper Hutt, New Zealand.

AMATEUR OF THE YEAR AWARD.

At the time of writing NOT A SINGLE NOMINATION
has been received. NOVEMBER 30th is the deadline!! SHAME ! SHAME !

WIRELESS INSTITUTE OF AUSTRALIA - INTRUDER WATCH SERVICE

OBSERVERS LOG SHEET

MONTH.

Name & Callsign.....

Address.....

Receiver..... Aerial(s).....

DATE	TIME GMT	FREQ in KHz*	C/SIGN if Heard	MODE	RST	BEAR ING *	DETAILS OF TRAFFIC ANY OTHER INFORM.

* "M" =Measured.
"E" =Estimated.

DATE.....

SIGNATURE.....

Please forward to your Divisional Co - ordinator Mr.D. Couch VK6WT
9 The Grove,
Wembley. 6014.

Coincidence Corner.

Neil VK6FI, a keen 10 metre operator recently worked JH2NWH, actually it was on 14th Sept. at 1630 Hrs on 28580 KHz. So what ? WELL on checking his log, much to his amazement, Neil found that he had worked the Same station on the same frequency at the same hour - - FOUR YEARS AGO !

FOR SALE.

KENWOOD TR-2200G 2 metre HAND-HELD TRANSCEIVER

Complete with channels 40., 50., Repeaters 2, 4, 6, 8, plus -
Nicad batteries \$150 ono.

STAR SR 700A COMMUNICATIONS RECEIVER

covering :- 80,49,41,40,31,19,16,15,13,10 metre bands.

Triple conversion with dial having 1 KHz graduations - -

Each band covers 600 KHz.	\$150	ono.
---------------------------	-------	------

Dave Smedley,

9 Beryl St., Balcatta, 6021 . Phone 09-3492911.

* * * * *

THE TEN - TEN MOVEMENT.

This sheet has been prepared by the members of the Welcome Stranger Chapter of the Ten-Ten International Net, for the information of those amateurs whose knowledge of the Ten-Ten movement may be a little hazy.

The Ten-Ten movement began some years ago in Southern California, when some amateur stations began to fear that the band might be lost to commercial and other interests. So the Ten-Ten movement began with the object of populating the ten metre band. Since that time it has grown in popularity until now it has over 20,000 members around the world.

Each member of the Ten-Ten group has a number for life, which he may pass on to any other amateur, if he wishes. If the station to whom he passes on his number is not already a member, he may save up those numbers until he has ten points, at which time he may apply for membership himself. To obtain admission and the ten points - you must work five "DX" stations at 2 points each, or ten local stations at one point each, or any combination of DX and local stations to make ten points. With sufficient points, you apply for membership to :- ZLIBB, Peter Williams, Rd. 1 Kaihere, Ngatea, New Zealand, enclosing \$4 for membership and subsequent bulletins.

In your application you must quote amateurs contacted, their call signs, Ten-Ten numbers, date and time of contact, etc. You will then receive a membership number and a certificate of membership. The world of the "Chapters" is now open to you.

Within the Ten-Ten movement there are hundreds of chapters, each with its own rules and awards. Here are some of the chapters, with their relevant information:-

The "Welcome Stranger" VK3 Chapter. This chapter was formed by Ballarat Victoria members of Ten-Ten with the aim of promoting activity on ten metres. An attractive certificate is issued to any amateur who obtains ten points from members of the Welcome Stranger Chapter. Charter - Ballarat mostly - members of the Welcome Stranger Chapter are each worth three points, while other members around the world are worth 4, 2 or 1 points each. For instance W5KHN, George in Texas, is a first state Charter Member, and is worth four points - VK6NAY Rob, in Western Australia is a first stater, worth 2 points. The cost for membership and the certificate is \$2 Australian, or 8 I.R.C.'s. There are endorsement awards for 50, 100 and 250 points in contacts. Secretary is Geoff. Smith VK3NLZ, 829 Lauri St., Mt. Pleasant, Ballarat 3350 Victoria, Australia. Awards Manager is Leo McPherson, VK3NIQ, P.O. Box 247, Ballarat East 3350 Victoria, AUSTRALIA.

The Blue Mountains Lagoon VK2 Chapter. Awards Manager, "Mac" McGrath VK2APD, 47 Mountain Lagoon Rd., Bilpin, N.S.W. 2758. Fifteen points in contacts required for entry. Certificates and endorsements with native animal motifs. Basic certificate \$2 Australian.

The Flagstaff VK3 Chapter. Awards Manager, Keith Hill, VK3NCF, Box 574 P.O. Warnambool, 3280 Victoria. Fifteen points required for entry, cost \$2 Australian.

The Canterbury ZL3 Chapter, and "Down Under" ZL1 Chapter. These are two very active chapters, and, due in part to their fortunate location in respect to U.S.A., have very close connections with the stateside chapters. Both these chapters have very attractive pictorial awards. The cost and requirements are similar to the others mentioned. It is particularly fortunate for the Australian Eastern States that these two ZL chapters are there, without them life would be much more difficult especially in short skip. Almost all of these chapters have endorsement or "Bar" awards, which can

4.

Results for the 2nd W.A. Annual 3.5 MHz SSB Contest held on 26th and 27th September, 1978.

1.	-	VK6NAG	-	162 Points
2.	*	VK6NAR	-	116 "
3.	-	VK6NDV	-	68 "
4.	-	VK6NCQ	-	56 "
5.	-	VK6CO	-	46 "
6.	-	VK6HU	-	40 "
7.	-	VK6CR	-	29 "
8.	-	VK6DC	-	12 "

Once again Jack VK6NAG has shown us how to get in there and win, that makes two notches on your belt this year Jack - congratulations, its as well the VHF Contest isn't open to you Hi.

But what happened to all the rest of us, after all the requests for contests - where was everyone ? Above is the total number of logs received out of 33 calls participating, but what about all the others who didn't even switch on. Let's make it a big one next year and have at least 150 calls and logs, make the Contest Committee do some work for a change.

C. Waterman VK6NK.
Contest Manager.

* * * * *

Results of the 2nd VHF/UHF Contest held 30th September and 1st October 1978.

WHAT DID EVERYONE FORGET.

+ + + + +
TEN - TEN continued,.....

be worked for, after obtaining the basic award. Some, including Welcome Stranger Chapter, have provisions which permit the working of a station a second time, in order to achieve these additional awards. Write to the secretaries for more detailed information.

All these awards make very attractive wall decorations and "conversation pieces" - join us !

Leo VK3NIQ.

GET THE HABIT - -PROPOSE A NEW MEMBER. THERE IS STRENGTH IN NUMBERS,
ASK ANY CB er.